Site and Operational Plans as conditionally approved by
Plan Commission on August 17, 2026

Rob Hansen
Community Development Director
October 26, 2026

3

SITE AND OPERATIONAL PLANS

ZILBER INDUSTRIAL 3

108TH STREET, LAKEVIEW CORPORATE PARK
PLEASANT PRAIRIE, WI

GOVERNING AGENCY CONTACTS

PLEASANT PRAIRIE VILLAGE HALL
9915 39TH STREET
PLEASANT PRAIRIE, WI 53158
OFFICE: (262) 694-1400

COMMUNITY DEVELOPMENT DEPARTMENT
ROBERT HANSON
- COMMUNITY DEVELOPMENT DIRECTOR
OFFICE: (262) 925-6713
EMAIL: rhanson@pleasantprairiewi.gov

PEGGY HERRICK
- ASSISTANT COMMUNITY DEVELOPMENT DIRECTOR
OFFICE: (262) 925-6716
EMAIL: pherrick@pleasantprairiewi.gov

MIRANDA STEINMETZ
- PLANNER II
OFFICE: (262) 925-6711
EMAIL: msteinmetz@pleasantprairiewi.gov

ENGINEERING DEPARTMENT
MATT FINEOUR, P.E.
- EXECUTIVE DIRECTOR OF INFRASTRUCTURE MANAGEMENT
OFFICE: (262) 925-6715
EMAIL: mfineour@pleasantprairiewi.gov

KURT DAVIDSEN, P.E.
- VILLAGE ENGINEER
OFFICE: (262) 925-6728
EMAIL: kdavidsen@pleasantprairiewi.gov

SARAH TOMCZYK
- ASSISTANT VILLAGE ENGINEER
OFFICE: (262) 948-8938
EMAIL: stomczyk@pleasantprairiewi.go

PUBLIC WORKS DEPARTMENT
TOM HUPP, P.E.
- DIRECTOR OF PUBLIC WORKS
ROGER PRANGE MUNICIPAL BUILDING
8600 GREEN BAY ROAD 53158
OFFICE: (262) 925-6768
EMAIL: thupp@pleasantprairiewi.gov

BUILDING INSPECTION DEPARTMENT
SANDRO PEREZ
- DIRECTOR OF BUILDING INSPECTIONS
OFFICE: (262) 925-6722
EMAIL: sperez@pleasantprairiewi.gov

FIRE & RESCUE DEPARTMENT
CRAIG ROEPKE
- CHIEF OF FIRE & RESCUE
9065 TERWALL TERRACE 53158
OFFICE: (262) 948-8975
EMAIL: croepke@pleasantprairiewi.gov

AARON LONGRIE
-ASSISTANT FIRE CHIEF
OFFICE: (262) 948-8975
EMAIL: alongrie@pleasantprairiewi.gov

WI DEPARTMENT OF NATURAL RESOURCES
ANDREA STERN
- WATER REGULATION/ZONING ENGINEER-ADV
OFFICE: 262-282-0634
EMAIL: andreastern@wisconsin.gov

PETER WOOD
- WATER RESOURCES ENGINEER
OFFICE: 262-884-2360
EMAIL: peterswood@wisconsin.gov

PUBLIC UTILITY CONTACTS

AMERICAN TRANSMISSION COMPANY
BRIAN MCGEE
OFFICE: 262-506-6895
EMAIL: bmcgee@atcllc.com
EMERGENCY NUMBER: (800) 972-5341

WISCONSIN D.O.T.
ART BAUMANN, TRAFFIC OPERATIONS ENGINEER
OFFICE: (262) 548-6707
EMAIL: art.bauman@dot.wi.gov

KEVIN KOEHNKE, PERMITS COORDINATOR
OFFICE: (262) 548-5891
EMAIL: kevinkoehnke@dot.wi.gov

KENOSHA COUNTY
GREGORY BOLDT
DIRECTOR/HIGHWAY COMMISSIONER
DIVISION OF HIGHWAYS - PUBLIC WORKS DEPARTMENT
OFFICE: 262.857.1810
EMAIL: GregoryBoldt@kenoshacounty.org

AT&T
BRENT LEWIS
OFFICE: 414.423.4214
EMAIL: bl5012@att.com

TDS TELECOM
SOUTHEAST WISCONSIN
OFFICE: 877.483.1142

TIME WARNER CABLE/SPECTRUM
STEVE CRAMER
CONSTRUCTION SUPERVISOR
OFFICE: 414.277.4045
EMAIL: stevecramer@charter.com
EMERGENCY NUMBER: 800.672.2288

WEC ENERGY GROUP
JOEL BURROW
CEM MANAGER
OFFICE: 414.221.3192
EMAIL: joelburrow@wecenergygroup.com

WE-ENERGIES
ALLIE KLAUINSKI
SENIOR SERVICE MANAGER
OFFICE: 262.595.3221
EMAIL: allieklauinski@we-energies.com

MICHAEL BAKER
CUSTOMER SERVICE MANAGER
OFFICE: 262-886-1041
EMAIL: michaelbaker@we-energies.com

HUSSAIN BIYAUERUALA
SENIOR ENGINEER
OFFICE: 262-886-1074
EMAIL: hussainbiyauerusla@we-energies.com

BRANDON ERTS
GAS ENGINEERING
OFFICE: 414-221-3654
EMAIL: brandon.erts@we-energies.com

NATURAL GAS EMERGENCY: 800.261.5325

ELECTRICAL EMERGENCY: 800.662.4797

SHEET INDEX

TI TITLE SHEET

CIVIL
C-1 COVER SHEET
C-2 EXISTING CONDITIONS & SITE DEMOLITION PLAN
C-3 PAVING & LAYOUT PLAN OVERVIEW
C-4 LAYOUT PLAN
C-5 PAVING & LAYOUT PLAN
C-6 GRADING PLAN OVERVIEW
C-7 GRADING PLAN
C-8 UTILITY PLAN OVERVIEW
C-9 UTILITY PLAN (STORM SEWER)
C-10 UTILITY PLAN (SANITARY SEWER & WATERMAIN)
C-11 WATERMAIN PLAN & PROFILE
C-12 WATERMAIN PLAN & PROFILE
C-13 EROSION CONTROL PLAN OVERVIEW
C-14 EROSION CONTROL PLAN
C-15 CONSTRUCTION DETAILS
C-16 CONSTRUCTION DETAILS
C-17 CONSTRUCTION DETAILS
C-18 CONSTRUCTION DETAILS
C-19 CONSTRUCTION DETAILS
C-20 CONSTRUCTION DETAILS
C-21 CONSTRUCTION DETAILS
C-22 CONSTRUCTION DETAILS

LANDSCAPE
L-1 LANDSCAPE OVERVIEW & TREE PLAN
L-2 LANDSCAPE SHRUB & PERENNIAL PLAN
L-3 LANDSCAPE GENERAL NOTES & PLANT SCHEDULE
L-4 LANDSCAPE GENERAL DETAILS

SITE LIGHTING
SITE LIGHTING LAYOUT

ARCHITECTURAL
A0.1 CODE SUMMARY
A1.1 SITE PLAN
A1.2 SITE DETAILS
A3.1 OVERALL BUILDING PLAN
A3.2 PARTIAL FLOOR PLAN
A3.3 PARTIAL FLOOR PLAN
A3.4 ENLARGED PLANS & NOTES
A3.5 SCHEDULES & NOTES
A4.1 EXTERIOR ELEVATIONS & FRAME TYPES
A5.1 WALL SECTIONS
A5.2 WALL SECTIONS
A5.3 WALL SECTIONS
A5.4 WALL SECTIONS & SECTION DETAILS
A6.1 PLAN DETAILS
A9.1 ROOF PLAN & DETAILS

STRUCTURAL
S0.1 STRUCTURAL NOTES
S0.2 STRUCTURAL NOTES
S1.0 FOUNDATION PLAN
S1.1 FOUNDATION PLAN
S2.0 ROOF FRAMING PLAN
S2.1 ROOF FRAMING PLAN
S8.0 FOUNDATION DETAILS
S8.1 FOUNDATION DETAILS
S8.5 FRAMING DETAILS
S8.6 FRAMING DETAILS

FIRE DEPARTMENT
FD1.1 FIRE DEPARTMENT CONDITIONS AND REQUIREMENTS
FD1.2 FIRE DEPARTMENT CONDITIONS AND REQUIREMENTS
FD1.3 FIRE DEPARTMENT DETAILS AND SPECIFICATIONS
FD1.4 FIRE DEPARTMENT DETAILS AND SPECIFICATIONS

1

PROJECT DATA

APPLICABLE CODES:

INTERNATIONAL BUILDING CODE - 2021 AS MODIFIED BY THE WISCONSIN ENROLLED COMMERCIAL BUILDING CODE IN CHAPTER SPS 362.

BUILDING CLASSIFICATION:

MIXED USE NON-SEPARATED, UNLIMITED AREA BUILDING

S-1 (MODERATE-HAZARD STORAGE)
F-1 (MODERATE-HAZARD FACTORY)
B (BUSINESS)

CONSTRUCTION CLASSIFICATION:

TYPE IIB - UNPROTECTED WITH AUTOMATIC SPRINKLER SYSTEM

FOOTPRINT AREA:	152,236 SF.
GROSS RENTABLE:	152,334 SF.

GENERAL NOTES

1. DO NOT SCALE DRAWINGS.
2. CONTRACTOR SHALL FIELD VERIFY AND BECOME THOROUGHLY FAMILIAR WITH ALL CONDITIONS AND DIMENSIONS.
3. EACH CONTRACTOR SHALL REVIEW COMPLETE PLANS FOR RELATED WORK.
4. ALL WORK SHALL BE IN COMPLINCE WITH STATE AND LOCAL CODES FOR RESPECTIVE TRADES.

ABBREVIATIONS

ALT	ALTERNATE	HDWR	HARDWARE
A/E	ARCHITECT/ENGINEER	HM	HOLLOW METAL
AFF	ABOVE FINISH FLOOR	HT	HEIGHT
ALUM	ALUMINUM	HW	HOT WATER
BD	BOARD	INT	INTERIOR
B/O	BOTTOM OF	INSUL	INSULATION
CPT	CARPET	JT	JOINT
℄	CENTER LINE	LAV	LAVATORY
CLG	CEILING	MFR	MANUFACTURER
CJ	CONTROL JOINT	MIN	MINIMUM
CMU	CONCRETE MASONRY UNIT	MO	MASONRY OPENING
CONC	CONCRETE	MTL	METAL
CONT	CONTINUOUS	NIC	NOT IN CONTRACT
CO	CLEAN OUT	NTS	NOT TO SCALE
CW	COLD WATER	OC	ON CENTER
CT	CERAMIC TILE	OFCI	OWNER FURNISHED, CONTRACTOR TO INSTALL
DBL	DOUBLE		
DF	DRINKING FOUNTAIN		
DIA	DIAMETER	OPP	OPPOSITE
DIM	DIMENSION	PLYWD	PLYWOOD
DN	DOWN	PL	PLASTIC LAMINATE
DR	DOOR	PL	PLATE
DS	DOWNSPOUT	PT	PORCELAIN TILE
DTL	DETAIL	QT	QUARRY TILE
DWG	DRAWING	REQ'D	REQUIRED
EA	EACH	RO	ROUGH OPENING
EIFS	EXTERIOR INSULATION AND FINISH SYSTEM	SHT	SHEET
		SV	SHEET VINYL
EL	ELEVATION	SIM	SIMILAR
EJ	EXPANSION JOINT	SS	SOLID SURFACE
EQ	EQUAL	SST	STAINLESS STEEL
EQUIP	EQUIPMENT	STD	STANDARD
EXIST	EXISTING	SAT	SUSPENDED ACOUSTIC TILE CEILING
EXT	EXTERIOR		
EWC	ELECTRIC WATER COOLER	TBD	TO BE DETERMINED
FEC	FIRE EXTINGUISHER CABINET	TEMP	TEMPORARY
		T/O	TOP OF
FIN	FINISH	T&G	TONGUE AND GROOVE
FD	FLOOR DRAIN	TYP	TYPICAL
FLR	FLOOR	UNO	UNLESS NOTED OTHERWISE
FRP	FIBERGLASS REINFORCED PLASTIC	VCT	VINYL COMPOSITION TILE
		VB	VINYL BASE
GA	GAUGE	VIF	VERIFY IN FIELD
GALV	GALVANIZED	WD	WOOD
GYP BD	GYPSUM BOARD	WWF	WELDED WIRE FABRIC

LOCATION MAP

PLEASANT PRAIRIE, WI

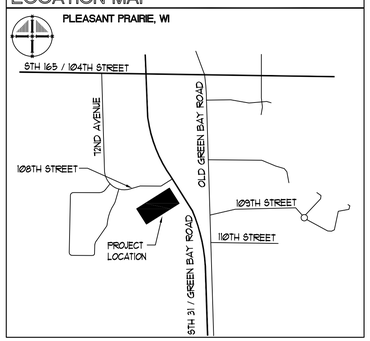

ZILBER PROPERTY GROUP

CLIENT:
ZILBER PROPERTY GROUP
710 N. PLANKINGTON AVENUE
MILWAUKEE, WI 53203
ATTN: JASON LUEDERS

Partners in Design ARCHITECTS

ARCHITECT:
PARTNERS IN DESIGN ARCHITECTS
2610 LAKE COOK ROAD, SUITE 280
RIVERWOODS, IL 60015
PHONE: 847.940.03300
ATTN: WERNER BRISSKE, AIA
OR
JEREMY HALL, AIA

PINNACLE ENGINEERING GROUP

CIVIL & LANDSCAPING ENGINEER:
PINNACLE ENGINEERING GROUP
15850 WEST BLUEMOUND ROAD, SUITE 210
BROOKFIELD, WI 53005
PHONE: 262.754.8888
FAX: 262.754.8850
ATTN: JUSTIN JOHNSON
OR
ANDY SHOAF

raSmith

STRUCTURAL ENGINEER:
R.A. SMITH NATIONAL, INC.
16745 WEST BLUEMOUND ROAD, SUITE 200
BROOKFIELD, WI 53005
PHONE: 262.317.3334
ATTN: STEVE ROLOFF

Partners in Design ARCHITECTS

ZILBER INDUSTRIAL 3
PROJECT NUMBER: 522.22.031

SITE & OPERATIONAL SUBMITTAL
ISSUE DATE: 08.12.22
REVISION DATE: 10.02.26

THESE PLANS AND DESIGNS ARE COPYRIGHT PROTECTED AND MAY NOT BE USED IN WHOLE OR IN PART WITHOUT THE WRITTEN CONSENT OF PINNACLE ENGINEERING GROUP, LLC

ONSITE CIVIL ENGINEERING INFRASTRUCTURE PLANS

FOR

ZILBER INDUSTRIAL 3 @ LAKEVIEW CORPORATE PARK

108TH STREET & GREEN BAY ROAD (STH "31")

VILLAGE OF PLEASANT PRAIRIE, KENOSHA COUNTY

PLANS PREPARED FOR:

ZILBER PROPERTY GROUP SM

710 N. PLANKINTON AVE.
MILWAUKEE, WI 53203

INDEX OF SHEETS

C-1	COVER SHEET
C-2	EXISTING CONDITIONS
C-3	EASEMENTS AND ENVIRONMENTAL FEATURES
C-4	DEMOLITION PLAN
C-5 - C-7	PAVING & LAYOUT PLANS
C-8 - C-9	GRADING PLANS
C-10 - C-12	UTILITY PLANS
C-13 - C-14	EROSION CONTROL PLANS
C-15 - C-22	CONSTRUCTION DETAILS
L-1 - L-5	LANDSCAPE PLAN

SITE DATA

SITE AREA:	995,256 S.F./22.85 AC
ZONING CLASSIFICATION:	
M2, GENERAL MANUFACTURING	
C-1, LOWLAND RESOURCE CONSERVANCY DISTRICT	
FP, FLOODPLAIN ZONING DISTRICTS	
BUILDING FOOTPRINT AREA:	152,334 S.F./3.50 AC/15.3%
IMPERVIOUS SPACE:	134,388 S.F./3.08 AC/13.5%
GREEN SPACE:	708,534 S.F./16.26 AC/71.2%
FLOODPLAIN:	110,202 S.F./2.53 AC
WETLAND:	170,327 S.F./3.91 AC
PARKING PROVIDED (9'x18'):	91 (4 ADA)
TRUCK DOCKS:	16 SPACES
DRIVE-IN DOORS:	2
TRAILER PARKING:	15 SPACES

LEGEND

	EXISTING	PROPOSED
SANITARY SEWER MANHOLE	S	
STORM SEWER MANHOLE	ST	
STORM SEWER CATCH BASIN (ROUND CASTING)	D	
FENCE POST	F	
STORM SEWER CATCH BASIN (RECTANGULAR CASTING)		
PRECAST FLARED END SECTION		
CONCRETE HEADWALL		
VALVE BOX	W	
FIRE HYDRANT		
CLEANOUT		
SANITARY SEWER		
FORCE MAIN		
STORM SEWER		
DRAIN TILE		
WATER MAIN	W	W
FIRE PROTECTION		FP
ELECTRICAL CABLE	E	E
OVERHEAD WIRES	OHW	OHW
GAS MAIN	G	G
TELEPHONE LINE	T	T
UTILITY CROSSING		X
CAUTION EXISTING UTILITIES NEARBY		CAUTION
GRANULAR TRENCH BACKFILL		
LIGHTING		
ELECTRICAL TRANSFORMER OR PEDESTAL	TF	
POWER POLE		
POWER POLE WITH LIGHT		
GUY WIRE		
STREET SIGN		
CONTOUR	749	749
SPOT ELEVATION	×(750.00)	✦750.00
WETLANDS	WET	
PRIMARY ENVIRONMENTAL CORRIDOR	PEC	
FLOODWAY		
FLOODPLAIN		
HIGH WATER LEVEL (HWL)		
NORMAL WATER LEVEL (NWL)		
DIRECTION OF SURFACE FLOW		GRADE / PAVEMENT
DITCH OR SWALE		
DIVERSION SWALE		
OVERFLOW RELIEF ROUTING		
TREE WITH TRUNK SIZE	6" / 6"	
SOIL BORING	B-3 / B-2 / B-1	B-3 / C-1
TOPSOIL PROBE		
FENCE LINE, TEMPORARY SILT	SF	SF
FENCE LINE, WIRE		
FENCE LINE, CHAIN LINK OR IRON		
FENCE LINE, WOOD OR PLASTIC		
CONCRETE SIDEWALK		
CURB AND GUTTER		
REVERSE PITCH CURB & GUTTER		
EASEMENT LINE		

VILLAGE NOTES

1. PRIOR TO CONSTRUCTION, A PRE-CONSTRUCTION CONFERENCE MUST BE HELD AT THE VILLAGE OFFICES. THE PRE-CONSTRUCTION CONFERENCE SHALL BE SCHEDULED AND MODERATED BY THE DESIGNING ENGINEER OF RECORD.
2. EACH CONTRACTOR SHALL HAVE A COPY OF THE VILLAGE APPROVED PLANS, PROJECT MANUAL, AND VILLAGE CONSTRUCTION SPECIFICATIONS ON-SITE DURING TIMES OF CONSTRUCTION. THE CONSTRUCTION SPECIFICATIONS ARE AN INTEGRAL PART OF THE CIVIL ENGINEERING PLANS.
3. ALL WORK WITHIN VILLAGE RIGHTS-OF-WAY, PUBLIC EASEMENTS, OR ON VILLAGE FACILITIES SHALL BE COMPLETED IN ACCORDANCE WITH VILLAGE ORDINANCE CHAPTER 405 BY PREQUALIFIED CONTRACTORS AND IN COMPLIANCE WITH THE APPLICABLE WORK IN THE RIGHT-OF-WAY PERMIT(S). FAILURE TO COMPLETE THE WORK IN ACCORDANCE WITH THESE REQUIREMENTS MAY RESULT IN THE VILLAGE REQUIRING THE ASSOCIATED IMPROVEMENTS TO BE REMOVED AND REPLACED.

GOVERNING AGENCY CONTACTS:

PLEASANT PRAIRIE VILLAGE HALL
9915 39TH STREET
PLEASANT PRAIRIE, WI 53158
(262) 694-1400

COMMUNITY DEVELOPMENT DEPARTMENT
ROB HANSON
DIRECTOR OF COMMUNITY DEVELOPMENT
(262) 925-6717
rhanson@pleasantprairiewi.gov

PEGGY HERRICK
ASSISTANT PLANNER & ZONING ADMINISTRATOR
(262) 925-6716
pherrick@pleasantprairiewi.gov

MIRANDA STEINMETZ
ADMINISTRATIVE COORDINATOR / PLANNER I
(262) 925-6717
msteinmetz@pleasantprairiewi.gov

ENGINEERING DEPARTMENT
MATT FINEOUR, P.E.
EXECUTIVE DIRECTOR OF INFRASTRUCTURE MANAGEMENT
(262) 925-6778
mfineour@pleasantprairiewi.gov

KURT DAVIDSEN, P.E.
VILLAGE ENGINEER
(262) 925-6728
kdavidsen@pleasantprairiewi.gov

BUILDING INSPECTION DEPARTMENT
SANDRO PEREZ
BUILDING INSPECTION SUPERINTENDENT
(262) 694-9304 OFFICE
(262) 925-6722 DIRECT
sperez@pleasantprairiewi.gov

MICHAEL KAPRELIAN
BUILDING INSPECTOR
(262) 694-9304
mkaprelian@pleasantprairiewi.gov

PUBLIC WORKS DEPARTMENT
TOM HUPP
DIRECTOR OF PUBLIC WORKS
ROGER PRANGE MUNICIPAL BUILDING
8600 GREEN BAY ROAD
(262) 925-6768
thupp@pleasantprairiewi.gov

FIRE & RESCUE DEPARTMENT
CRAIG ROEPKE,
CHIEF OF FIRE & RESCUE
8044 88TH AVENUE
(262) 694-8027
croepke@pleasantprairiewi.gov

AARON LONGRIE
ASSISTANT FIRE CHIEF
(262) 694-8027
alongrie@pleasantprairiewi.gov

WISCONSIN DOT
ART BAUMANN
TRAFFIC OPERATIONS ENGINEER
(262) 548-6707
art.baumann@dot.wi.gov

KEVIN KOEHNKE, P.E.
PERMITS COORDINATOR
(262) 548-5891
kevin.koehnke@dot.wi.gov

KENOSHA COUNTY
GREG BOLDT, P.E.
DIRECTOR/HIGHWAY COMMISSIONER
DIVISION OF HIGHWAYS - PUBLIC WORKS DEPARTMENT
OFFICE: (262) 857-1870
CELL:(262) 220-0805
gregory.boldt@kenoshacounty.org

WI DEPARTMENT OF NATURAL RESOURCES
ALISON MASEK
WATER MANAGEMENT SPECIALIST
(608) 575-9849
alison.masek@wisconsin.gov

PETER WOOD. P.E.
WATER RESOURCES ENGINEER
(262) 884-2360
peter.wood@wisconsin.gov

LOCATION MAP
SCALE: 1"=1000'

NORTH

PROJECT TEAM CONTACTS:

CIVIL ENGINEER:
ANDY SHOAF, P.E.
PINNACLE ENGINEERING GROUP
20725 WATERTOWN ROAD, SUITE 100
BROOKFIELD, WI 53186
(262) 754-8888
andrew.shoaf@pinnacle-engr.com

APPLICANT:
JASON LUEDERS
ZILBER PROPERTY GROUP
710 N. PLANKINTON AVENUE
MILWAUKEE, WI 53203
(414) 274-2807

SURVEYOR:
JOHN KONOPACKI
PINNACLE ENGINEERING GROUP
20725 WATERTOWN ROAD, SUITE 100
BROOKFIELD, WI 53186
(262) 754-8888
john.konopacki@pinnacle-engr.com

ARCHITECT
JEREMY HALL, A.I.A.
PARTNERS IN DESIGN
2610 LAKE COOK ROAD, SUITE 280
RIVERWOODS, IL 60015
(847) 940-0300
jeremyh@pidarchitects.com

PUBLIC UTILITY CONTACTS:

AMERICAN TRANSMISSION COMPANY
BRIAN MCGEE
(262) 506-6895
bmcgee@atcllc.com
(800) 972-5341 EMERGENCY

AT&T
BRENT LEWIS
(414) 429-4214
bl521d@att.com

TDS TELECOM
SOUTHEAST WISCONSIN
(877) 483-7142

TIME WARNER CABLE/SPECTRUM
STEVE CRAMER
CONSTRUCTION SUPERVISOR
(414) 277-4045
steve.cramer@charter.com
(800) 627-2288 EMERGENCY

WEC ENERGY GROUP
JOEL BURROW
CEM MANAGER
(414) 221-3192
joel.burrow@wecenergygroup.com

WE ENERGIES
ALLIE KLAWINSKI
SR. SERVICE MANAGER
(262) 552-3227
allie.klawinski@we-energies.com

MICHAEL BAKER
CUSTOMER SERVICE MANAGER
(262) 886-7041
michael.baker@we-energies.com

HUSSAIN BIYAWERWALA
SENIOR ENGINEER
(262) 886-7074
hussain.biyawerwala@we-energies.com

BRANDON ERTS
GAS ENGINEERING
(414) 221-3654
brandon.erts@we-energies.com

NATURAL GAS EMERGENCY
(800) 261-5325

ELECTRICAL EMERGENCY
(800) 662-4797

REQUIRED SUBMITTALS FOR APPROVAL

1. **HOT MIX ASPHALT** - MIX DESIGN
2. **CONCRETE PAVEMENTS (EXTERIOR)** - MIX DESIGN & JOINT PLAN
3. **PAVEMENT STONE BASE COURSE** - GRADATION
4. **PIPE BEDDING & TRENCH BACKFILL** - GRADATION
5. **MANHOLE BACKFILL** - GRADATION
6. **PAVEMENT MARKING PAINT**

REQUIRED SUBMITTALS FOR RECORDS

1. **WATER MAIN PIPES, VALVES, HYDRANTS & FITTINGS**
2. **SANITARY SEWER PIPE & FITTINGS**
3. **STORM SEWER PIPE, STRUCTURES, & FITTINGS**
4. **TRACER WIRE**
5. **UNDERGROUND UTILITY LOCATION RECORD DRAWINGS**
6. **ADA SIGN, PAINT & STENCILS**
7. **CHEMICAL SOIL STABILIZATION MIX DESIGN (IF APPLICABLE)**

ABBREVIATIONS

BL	BASE LINE	NWL	NORMAL WATER LEVEL
C	LONG CHORD OF CURVE	PC	POINT OF CURVATURE
C & G	CURB AND GUTTER	PT	POINT OF TANGENCY
CB	CATCH BASIN	PVI	POINT OF VERTICAL INTERSECTION
CL	CENTERLINE	R	RADIUS
D	DEGREE OF CURVE	ROW	RIGHT-OF-WAY
EP	EDGE OF PAVEMENT	SAN	SANITARY SEWER
FF	FINISHED FLOOR	ST	STORM SEWER
FG	FINISHED GRADE	T	TANGENCY OF CURVE
FL	FLOW LINE	TB	TOP OF BANK
FP	FLOODPLAIN	TC	TOP OF CURB
FR	FRAME	TF	TOP OF FOUNDATION
FW	FLOODWAY	TP	TOP OF PIPE
HWL	HIGH WATER LEVEL	TS	TOP OF SIDEWALK
INV	INVERT	TW	TOP OF WALK
INL	INLET	WM	WATER MAIN
L	LENGTH OF CURVE	△	INTERSECTION ANGLE
MH	MANHOLE		

GENERAL NOTES

1. THE INTENTION OF THE PLANS AND SPECIFICATIONS IS TO SET FORTH PERFORMANCE AND CONSTRUCTION MATERIAL STANDARDS FOR THE PROPER EXECUTION OF WORK. ALL WORKS CONTAINED WITHIN THE PLANS AND SPECIFICATIONS SHALL BE COMPLETED IN ACCORDANCE WITH ALL REQUIREMENTS FROM LOCAL, STATE, FEDERAL OR OTHER GOVERNING AGENCY'S LAWS, REGULATIONS, JURISDICTIONAL ORDINANCES/CODES/RULES/ETC., AND THE OWNER'S DIRECTION.
2. A GEOTECHNICAL REPORT IS AVAILABLE AT THIS TIME FOR THE PROJECT SITE. IT SHALL BE EXPRESSLY UNDERSTOOD THAT OWNER WILL NOT BE RESPONSIBLE FOR ANY INTERPRETATIONS OR CONCLUSIONS DRAWN THERE FROM BY THE CONTRACTOR. DATA IS MADE AVAILABLE FOR THE CONVENIENCE OF THE CONTRACTOR. THE CONTRACTOR IS RESPONSIBLE FOR PERFORMING ANY ADDITIONAL SOILS INVESTIGATIONS THEY FEEL IS NECESSARY FOR THE PROPER EVALUATION OF THE SITE FOR PURPOSES OF PLANNING, BIDDING, OR CONSTRUCTING THE PROJECT AT NO ADDITIONAL COST TO THE OWNER.
3. THE CONTRACTOR IS RESPONSIBLE TO REVIEW AND UNDERSTAND ALL COMPONENTS OF THE PLANS, REPORTS, AND SPECIFICATIONS, INCLUDING FIELD VERIFYING SOIL CONDITIONS, PRIOR TO SUBMISSION OF A BID PROPOSAL.
4. THE CONTRACTOR SHALL PROMPTLY REPORT ANY ERRORS OR AMBIGUITIES LEARNED AS PART OF THEIR REVIEW OF PLANS, SPECIFICATIONS, REPORTS AND FIELD INVESTIGATIONS.
5. THE CONTRACTOR IS SOLELY RESPONSIBLE FOR THE COMPUTATION OF QUANTITIES AND WORK REQUIRED TO COMPLETE THIS PROJECT. THE CONTRACTOR'S BID SHALL BE BASED ON ITS OWN COMPUTATIONS AND IN NO SUCH INSTANCE RELY ON THE ENGINEER'S ESTIMATE.
6. QUESTIONS/CLARIFICATIONS WILL BE INTERPRETED BY ENGINEER/OWNER PRIOR TO THE AWARD OF CONTRACT. ENGINEER/OWNER WILL SUBMIT OFFICIAL RESPONSES IN WRITING. INTERPRETATIONS PRESENTED IN OFFICIAL RESPONSES SHALL BE BINDING ON ALL PARTIES ASSOCIATED WITH THE CONTRACT. IN NO WAY SHALL WORD-OF-MOUTH DIALOG CONSTITUTE AN OFFICIAL RESPONSE.
7. PRIOR TO CONSTRUCTION, A PRE-CONSTRUCTION CONFERENCE MUST BE HELD AT THE VILLAGE OFFICES. THE PRE-CONSTRUCTION CONFERENCE SHALL BE SCHEDULED AND MODERATED BY THE DESIGNING ENGINEER OF RECORD
8. PRIOR TO START OF WORK, CONTRACTOR SHALL BE COMPLETELY FAMILIAR WITH ALL CONDITIONS OF THE SITE, AND SHALL ACCOUNT FOR CONDITIONS THAT AFFECT, OR MAY AFFECT CONSTRUCTION INCLUDING, BUT NOT LIMITED TO, LIMITATIONS OF WORK ACCESS, SPACE LIMITATIONS, OVERHEAD OBSTRUCTIONS, TRAFFIC PATTERNS, LOCAL REQUIREMENTS, ADJACENT ACTIVITIES, ETC. FAILURE TO CONSIDER SITE CONDITIONS SHALL NOT BE CAUSE FOR CLAIM OF JOB EXTRAS.
9. COMMENCEMENT OF CONSTRUCTION SHALL EXPLICITLY CONFIRM THAT THE CONTRACTOR HAS REVIEWED THE PLANS AND SPECIFICATIONS IN ENTIRETY AND CERTIFIES THAT THEIR SUBMITTED BID PROPOSAL CONTAINS PROVISIONS TO COMPLETE THE PROJECT, WITH THE EXCEPTION OF UNFORESEEN FIELD CONDITIONS; ALL APPLICABLE PERMITS HAVE BEEN OBTAINED; AND CONTRACTOR UNDERSTANDS ALL OF THE REQUIREMENTS OF THE PROJECT.
10. SHOULD ANY DISCREPANCIES OR CONFLICTS IN THE PLANS OR SPECIFICATIONS BE DISCOVERED AFTER THE AWARD OF CONTRACT, ENGINEER SHALL BE NOTIFIED IN WRITING IMMEDIATELY AND CONSTRUCTION OF ITEMS AFFECTED BY THE DISCREPANCIES/CONFLICTS SHALL NOT COMMENCE, OR CONTINUE, UNTIL A WRITTEN RESPONSE FROM ENGINEER/OWNER IS DISTRIBUTED. IN THE EVENT OF A CONFLICT BETWEEN REFERENCED CODES, STANDARDS, SPECIFICATIONS AND PLANS, THE ONE ESTABLISHING THE MOST STRINGENT REQUIREMENTS SHALL BE FOLLOWED.
11. THE CONTRACTOR SHALL, AT ITS OWN EXPENSE, OBTAIN ALL NECESSARY PERMITS AND LICENSES TO COMPLETE THE PROJECT. OBTAINING PERMITS, OR DELAYS, IS NOT CAUSE FOR DELAY OF THE CONTRACT OR SCHEDULE. CONTRACTOR SHALL COMPLY WITH ALL PERMIT REQUIREMENTS.
12. THE CONTRACTOR SHALL NOTIFY ALL INTERESTED GOVERNING AGENCIES, UTILITY COMPANIES AFFECTED BY THIS CONSTRUCTION PROJECT, AND DIGGER'S HOTLINE IN ADVANCE OF CONSTRUCTION TO COMPLY WITH ALL JURISDICTIONAL ORDINANCES/CODES/RULES/ETC., PERMIT STIPULATIONS, AND OTHER APPLICABLE STANDARDS.
13. SAFETY IS THE SOLE RESPONSIBILITY OF THE CONTRACTOR. THE CONTRACTOR SHALL BE RESPONSIBLE TO INITIATE, INSTITUTE, ENFORCE, MAINTAIN, AND SUPERVISE ALL SAFETY PRECAUTIONS AND JOB SITE SAFETY PROGRAMS IN CONNECTION WITH THE WORK.
14. CONTRACTOR SHALL KEEP THE JOBSITE CLEAN AND ORDERLY AT ALL TIMES. ALL LOCATIONS OF THE SITE SHALL BE KEPT IN A WORKING MANNER SUCH THAT DEBRIS IS REMOVED CONTINUOUSLY AND ALL RESPECTIVE CONTRACTORS OPERATE UNDER GENERAL "GOOD HOUSEKEEPING."
15. THE CONTRACTOR SHALL INDEMNIFY THE OWNER, ENGINEER, AND THEIR AGENTS FROM ALL LIABILITY INVOLVED WITH THE CONSTRUCTION, INSTALLATION, AND TESTING OF THE WORK ON THIS PROJECT.
16. ANY WATER SHUTDOWNS NEEDED DURING CONSTRUCTION WILL NEED TO BE PERFORMED BY THE VILLAGE OF PLEASANT PRAIRIE DEPARTMENT OF PUBLIC WORKS AND COORDINATED WITH AREA BUSINESSES.

DIGGERS HOTLINE
Toll Free (800) 242-8511
Milwaukee Area (414) 259-1181
Hearing Impaired TDD (800) 542-2289
www.DiggersHotline.com

EXPIRATION DATE: JULY 31, 2020

PINNACLE ENGINEERING GROUP, LLC - ENGINEER'S LIMITATION

PINNACLE ENGINEERING GROUP, LLC AND THEIR CONSULTANTS DO NOT WARRANT OR GUARANTEE THE ACCURACY AND COMPLETENESS OF THE DELIVERABLES HEREIN BEYOND A REASONABLE DILIGENCE. IF ANY MISTAKES, OMISSIONS, OR DISCREPANCIES ARE FOUND TO EXIST WITHIN THE DELIVERABLES, THE ENGINEER SHALL BE PROMPTLY NOTIFIED PRIOR TO BID SO THAT HE MAY HAVE THE OPPORTUNITY TO TAKE WHATEVER STEPS NECESSARY TO RESOLVE THEM. FAILURE TO PROMPTLY NOTIFY THE ENGINEER OF SUCH CONDITIONS SHALL ABSOLVE THE ENGINEER FROM ANY RESPONSIBILITY FOR THE CONSEQUENCES OF SUCH FAILURE. ACTIONS TAKEN WITHOUT THE KNOWLEDGE AND CONSENT TO THE ENGINEER, OR IN CONTRADICTION TO THE ENGINEER'S DELIVERABLES OR RECOMMENDATIONS, SHALL BECOME THE RESPONSIBILITY NOT OF THE ENGINEER BUT OF THE PARTIES RESPONSIBLE FOR TAKING SUCH ACTION.

FURTHERMORE, PINNACLE ENGINEERING GROUP, LLC IS NOT RESPONSIBLE FOR CONSTRUCTION SAFETY OR THE MEANS AND METHODS OF CONSTRUCTION.

REVIEWED:
DESIGNED: AJS
DRAFTED: AJS

PLAN | DESIGN | DELIVER
www.pinnacle-engr.com

PINNACLE ENGINEERING GROUP
ENGINEERING | NATURAL RESOURCES | SURVEYING

WISCONSIN OFFICE:
20725 WATERTOWN ROAD, SUITE 100
BROOKFIELD, WI 53186
(262) 754-8888
CHICAGO | MILWAUKEE : NATIONWIDE

ZILBER INDUSTRIAL 3 @ LAKEVIEW CORPORATE PARK
108TH STREET & GREEN BAY ROAD (STH "31")
VILLAGE OF PLEASANT PRAIRIE, KENOSHA COUNTY

COVER SHEET

REVISIONS

1	VOPP SITE PLAN SUBMITTAL	03/20/26	
2	VOPP RESUBMITTAL	05/11/26	
3	VOPP RESUBMITTAL	07/17/26	
4	VOPP RESUBMITTAL	10/02/26	

PEG JOB No. 644.00-WI
PEG PM AJS
START DATE 03/20/26
SCALE N.T.S.

SHEET
C-1
C-22

COVER SHEET

©COPYRIGHT 2019

www.pinnacle-engr.com

Z:\PROJECTS\2016\644.00-WI\CAD\SHEETS\644.00-WI-SHEETS-COVER.DWG

THESE PLANS AND DESIGNS ARE COPYRIGHT PROTECTED AND MAY NOT BE USED IN WHOLE OR IN PART WITHOUT THE WRITTEN CONSENT OF PINNACLE ENGINEERING GROUP, LLC

EXISTING CONDITIONS SURVEY:

EXISTING CONDITIONS SURVEY PROVIDED BY PINNACLE ENGINEERING GROUP. ALTHOUGH PEG HAS NO REASON TO BELIEVE THE SURVEY IS INACCURATE, PEG MAKES NO WARRANTS THAT EXISTING INFORMATION CONTAINED WITHIN THESE PLANS IS ALL-INCLUSIVE OR ACCURATE. CONTRACTOR SHALL UNDERTAKE NECESSARY EFFORTS TO VERIFY THE EXISTING CONDITIONS PRIOR TO THE START OF MATERIAL PROCUREMENT AND CONSTRUCTION EFFORTS/ACTIVITIES.

ALL WORK WITHIN PUBLIC R.O.W. AND PUBLIC EASEMENTS SHALL CONFORM TO THE VILLAGE OF PLEASANT PRAIRIE CHAPTER 405 CONSTRUCTION SPECIFICATIONS.

CONTRACTOR RESPONSIBILITY:

THE INFORMATION SHOWN ON THIS DRAWING CONCERNING TYPE AND LOCATION OF UNDERGROUND UTILITIES IS NOT GUARANTEED TO BE ACCURATE OR ALL INCLUSIVE. THE CONTRACTOR IS RESPONSIBLE FOR MAKING HIS OWN DETERMINATIONS AS TO THE TYPE AND LOCATION OF UNDERGROUND UTILITIES AS MAY BE NECESSARY TO AVOID DAMAGE THERETO. IF ADDITIONAL UTILITIES ARE KNOWN TO EXIST IN THE PROPERTY, THE OWNER WILL PROVIDE EXISTING PLANS OF OTHER UTILITIES SERVING THE SITE AND THE BUILDING THAT OTHERWISE CANNOT BE LOCATED BY A VISUAL OBSERVATION OF THE PROPERTY OR OF WHICH THE SURVEYOR WOULD HAVE NO KNOWLEDGE.

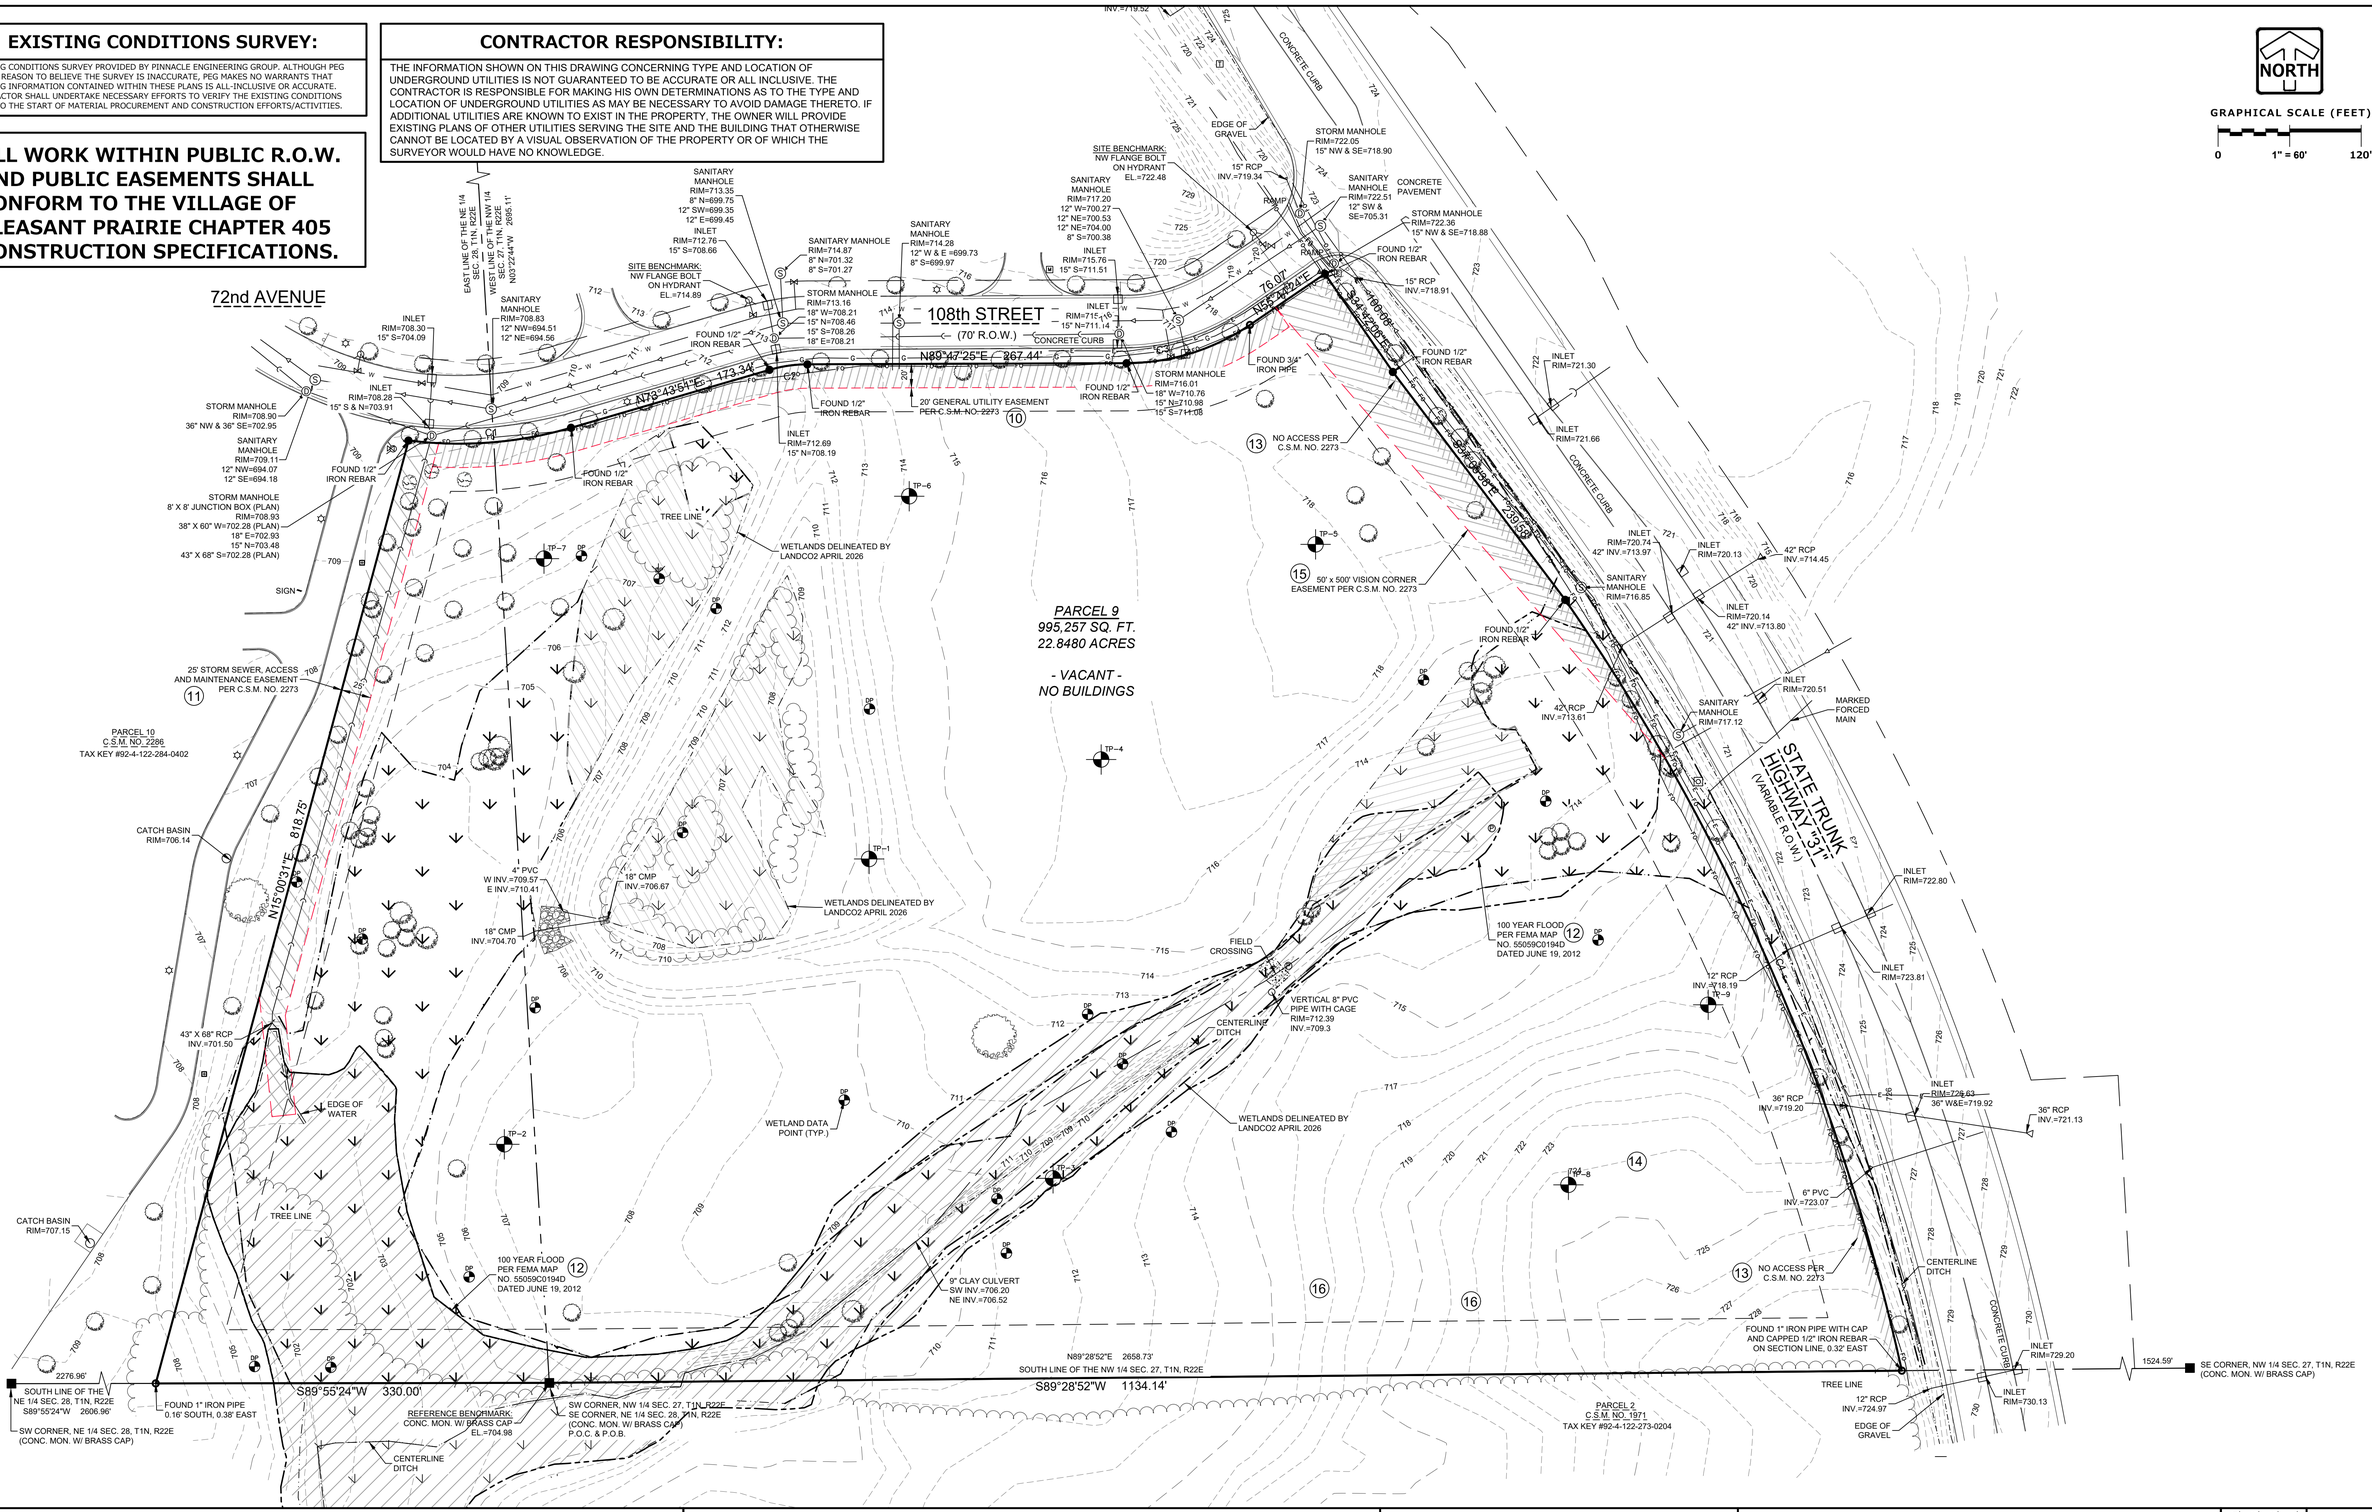

www.pinnacle-engr.com

REVIEWED: DESIGNED: AJS DRAFTED: AJS

PLAN | DESIGN | DELIVER
www.pinnacle-engr.com

PINNACLE ENGINEERING GROUP
ENGINEERING | NATURAL RESOURCES | SURVEYING

WISCONSIN OFFICE:
20725 WATERTOWN ROAD, SUITE 100
BROOKFIELD, WI 53186
(262) 754-8888
CHICAGO | MILWAUKEE - NATIONWIDE

ZILBER INDUSTRIAL 3 @ LAKEVIEW CORPORATE PARK

108TH STREET & GREEN BAY ROAD (STH "31")
VILLAGE OF PLEASANT PRAIRIE, KENOSHA COUNTY

EXISTING CONDITIONS

REVISIONS

1	VOPP SITE PLAN SUBMITTAL	03/20/26	
2	VOPP RESUBMITTAL	05/11/26	
3	VOPP RESUBMITTAL	07/17/26	
4	VOPP RESUBMITTAL	10/02/26	

PEG JOB No. 644.00-WI
PEG PM AJS
START DATE 03/20/26
SCALE

SHEET
C-2
C-22

© COPYRIGHT 2019

EXISTING CONDITIONS

Z:\PROJECTS\2016\644.00-WI\CAD\SHEETS\644.00-WI-SHEETS-EXISTING-CONDITIONS.DWG

THESE PLANS AND DESIGNS ARE COPYRIGHT PROTECTED AND MAY NOT BE USED IN WHOLE OR IN PART WITHOUT THE WRITTEN CONSENT OF PINNACLE ENGINEERING GROUP, LLC

NORTH

GRAPHICAL SCALE (FEET)

0 1" = 60' 120'

No.	DESCRIPTION
10	20' GENERAL UTILITY EASEMENT PER C.S.M. No. 2273
11	25' STORM SEWER, ACCESS AND MAINTENANCE EASEMENT PER C.S.M. No. 2273
12	PROPOSED DEDICATED STORMWATER EASEMENT
13	PROPOSED DEDICATED PUBLIC UTILITY EASEMENT
14	PROPOSED DEDICATED PUBLIC STREET
15	50' x 500' VISION CORNER EASEMENT PER C.S.M. No. 2273
16	FLOODPLAIN AREA BASED ON VILLAGE OF PLEASANT PRAIRIE FLOODPLAIN BOUNDARY ADJUSTMENT; STATE OF WISCONSIN DEPARTMENT OF NATURAL RESOURCES FLOODPLAIN ANALYSIS REVIEW, UN-NAMED TRIBUTARY NO. 1 TO THE DES PLAINS RIVER, VILLAGE OF PLEASANT PRAIRIE, KENOSHA COUNTY; AND FEDERAL EMERGENCY MANAGEMENT AGENCY (FEMA) CONDITIONAL LETTER OF MAP REVISION (CLOMR) CASE NO. 20-05-3166R FOR THE REVISION OF FLOOD INSURANCE RATE MAP COMMUNITY PANEL NO. 55059C0194D WITH AN EFFECTIVE DATE OF JUNE 19, 2012
17	WETLANDS DELINEATED BY LANDCO2 APRIL 2026 TO REMAIN
18	WETLANDS DELINEATED BY LANDCO2 APRIL 2026, TO BE FILLED

www.pinnacle-engr.com

EASEMENTS AND ENVIRONMENTAL FEATURES

REVIEWED:
DESIGNED: AJS
DRAFTED: AJS

PLAN | DESIGN | DELIVER
www.pinnacle-engr.com
PINNACLE ENGINEERING GROUP
ENGINEERING | NATURAL RESOURCES | SURVEYING
WISCONSIN OFFICE:
20725 WATERTOWN ROAD, SUITE 100
BROOKFIELD, WI 53186
(262) 754-8888
CHICAGO | MILWAUKEE : NATIONWIDE

ZILBER INDUSTRIAL 3 @ LAKEVIEW CORPORATE PARK

VILLAGE OF PLEASANT PRAIRIE, KENOSHA COUNTY

EASEMENTS AND ENVIRONMENTAL FEATURES

REVISIONS

1	VOPP SITE PLAN SUBMITTAL	03/20/26	
2	VOPP RESUBMITTAL	05/11/26	
3	VOPP RESUBMITTAL	07/17/26	
4	VOPP RESUBMITTAL	10/02/26	

PEG JOB No. 644.00-WI
PEG PM AJS
PLAN DATE 03/20/26
SCALE 1" = 60'

SHEET
C-3
OF
C-22

© COPYRIGHT 2026

Z:\PROJECTS\2016\644.00-WI\CAD\SHEETS\644.00-WI-SHEETS-EASEMENT EXHIBIT (2026-05-14).DWG

THESE PLANS AND DESIGNS ARE COPYRIGHT PROTECTED AND MAY NOT BE USED IN WHOLE OR IN PART WITHOUT THE WRITTEN CONSENT OF PINNACLE ENGINEERING GROUP, LLC

EXISTING CONDITIONS SURVEY:

EXISTING CONDITIONS SURVEY PROVIDED BY PINNACLE ENGINEERING GROUP. ALTHOUGH PEG HAS NO REASON TO BELIEVE THE SURVEY IS INACCURATE, PEG MAKES NO WARRANTS THAT EXISTING INFORMATION CONTAINED WITHIN THESE PLANS IS ALL-INCLUSIVE OR ACCURATE. CONTRACTOR SHALL UNDERTAKE NECESSARY EFFORTS TO VERIFY THE EXISTING CONDITIONS PRIOR TO THE START OF MATERIAL PROCUREMENT AND CONSTRUCTION EFFORTS/ACTIVITIES.

ALL WORK WITHIN PUBLIC R.O.W. AND PUBLIC EASEMENTS SHALL CONFORM TO THE VILLAGE OF PLEASANT PRAIRIE CHAPTER 405 CONSTRUCTION SPECIFICATIONS.

CONTRACTOR RESPONSIBILITY:

THE INFORMATION SHOWN ON THIS DRAWING CONCERNING TYPE AND LOCATION OF UNDERGROUND UTILITIES IS NOT GUARANTEED TO BE ACCURATE OR ALL INCLUSIVE. THE CONTRACTOR IS RESPONSIBLE FOR MAKING HIS OWN DETERMINATIONS AS TO THE TYPE AND LOCATION OF UNDERGROUND UTILITIES AS MAY BE NECESSARY TO AVOID DAMAGE THERETO. IF ADDITIONAL UTILITIES ARE KNOWN TO EXIST IN THE PROPERTY, THE OWNER WILL PROVIDE EXISTING PLANS OF OTHER UTILITIES SERVING THE SITE AND THE BUILDING THAT OTHERWISE CANNOT BE LOCATED BY A VISUAL OBSERVATION OF THE PROPERTY OR OF WHICH THE SURVEYOR WOULD HAVE NO KNOWLEDGE.

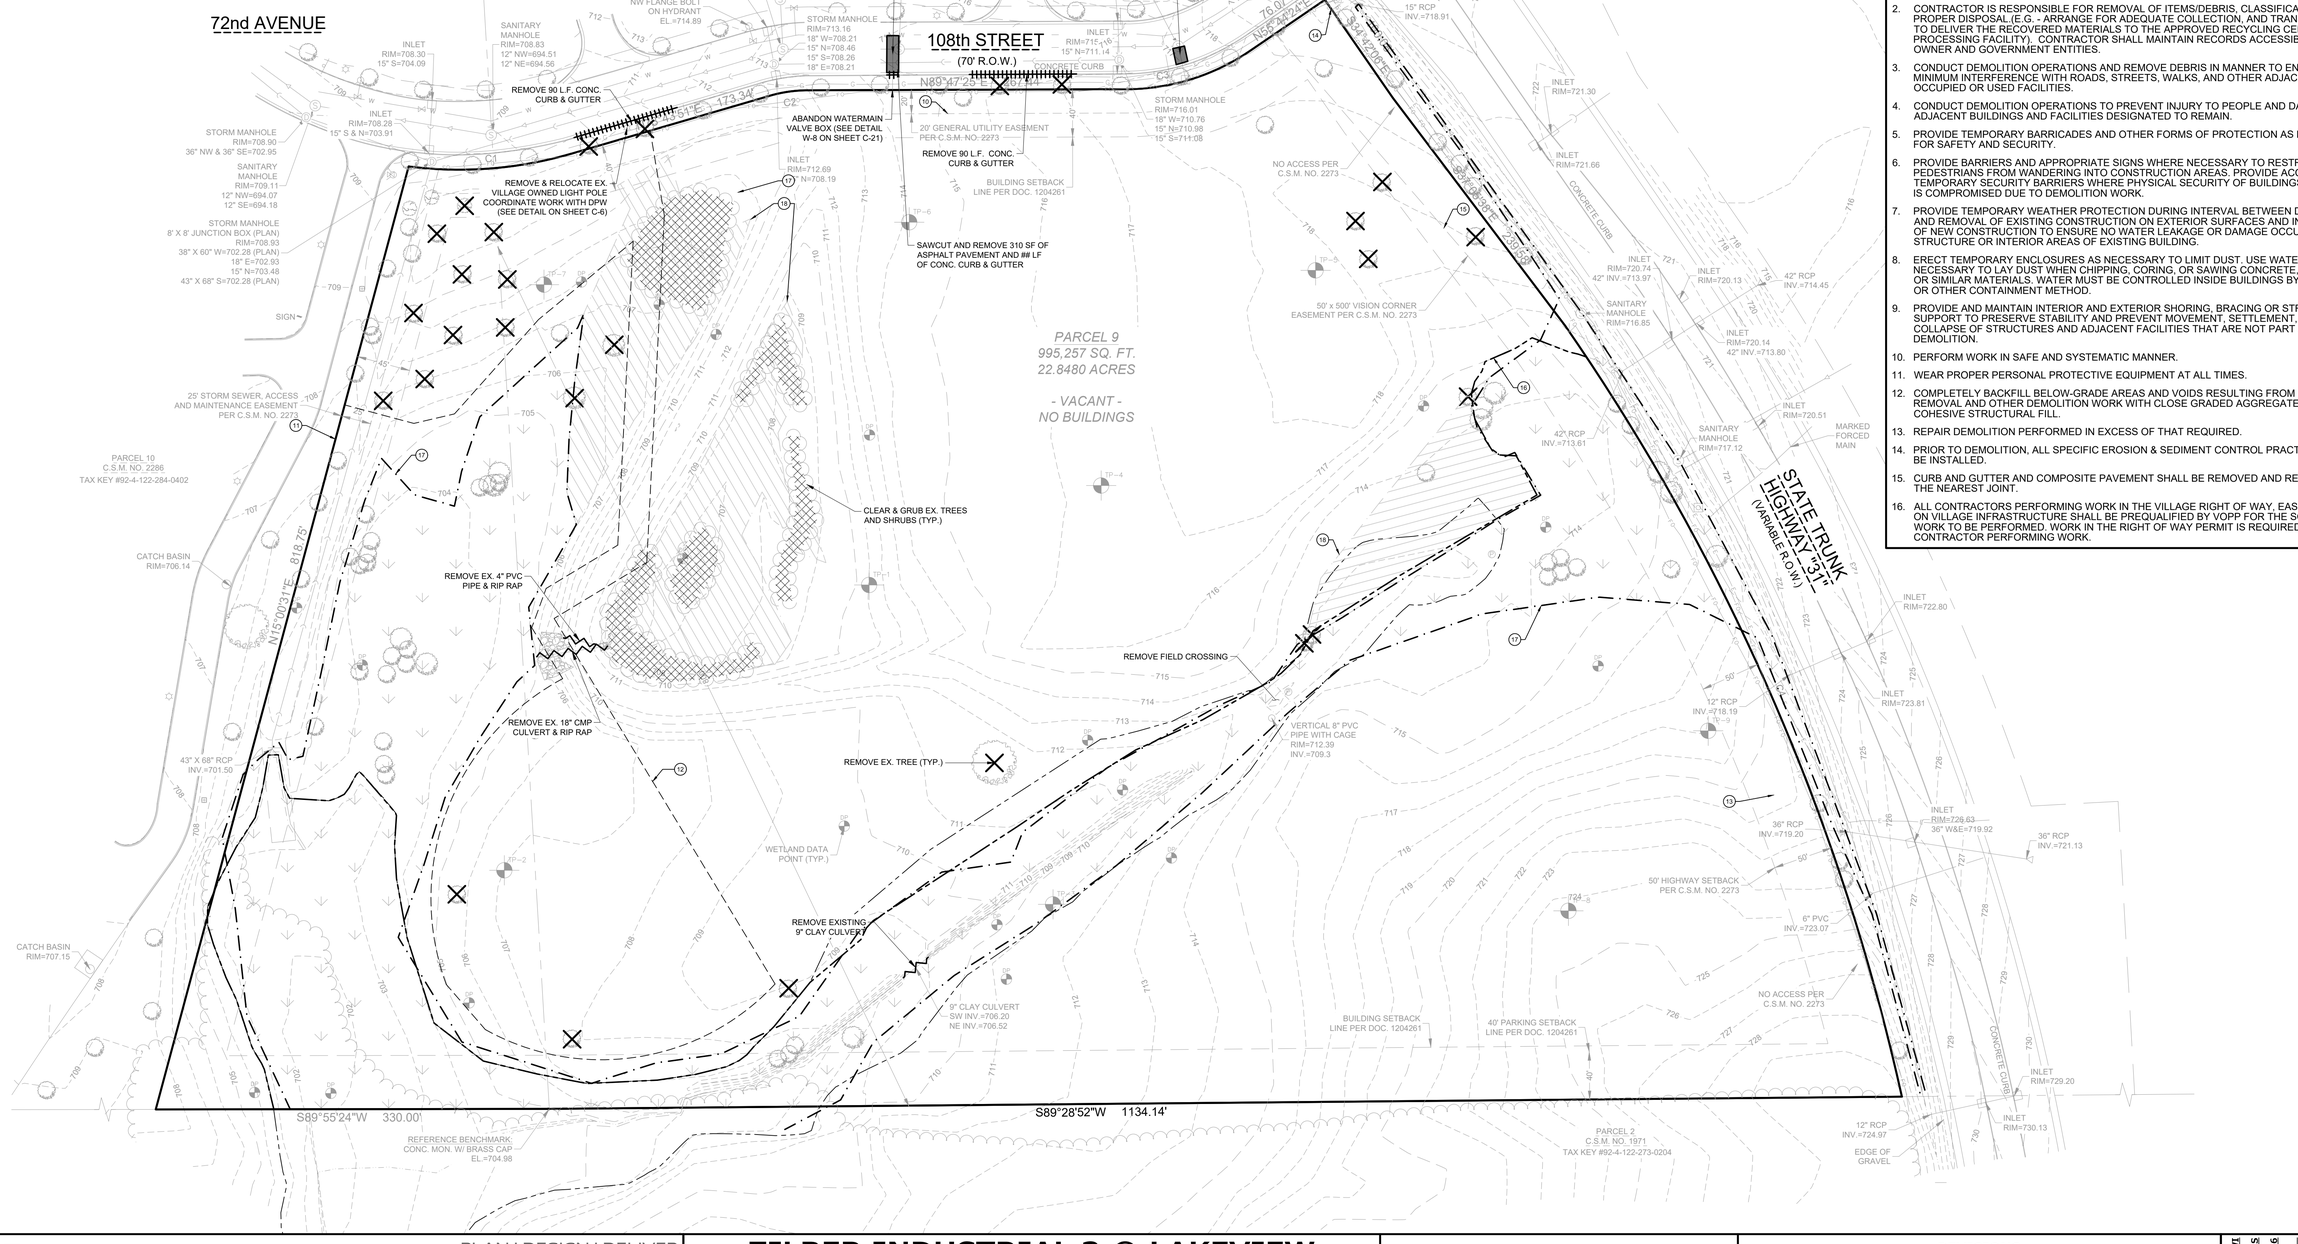

DEMOLITION & CLEARING

1. CONTRACTOR SHALL BE RESPONSIBLE FOR ENSURING THAT THE APPROPRIATE GOVERNMENTAL ENTITIES ARE NOTIFIED OF THE WORK AND NECESSARY PERMITS ARE OBTAINED.
2. CONTRACTOR IS RESPONSIBLE FOR REMOVAL OF ITEMS/DEBRIS, CLASSIFICATION, AND PROPER DISPOSAL.(E.G. - ARRANGE FOR ADEQUATE COLLECTION, AND TRANSPORTATION TO DELIVER THE RECOVERED MATERIALS TO THE APPROVED RECYCLING CENTER OR PROCESSING FACILITY). CONTRACTOR SHALL MAINTAIN RECORDS ACCESSIBLE TO THE OWNER AND GOVERNMENT ENTITIES.
3. CONDUCT DEMOLITION OPERATIONS AND REMOVE DEBRIS IN MANNER TO ENSURE MINIMUM INTERFERENCE WITH ROADS, STREETS, WALKS, AND OTHER ADJACENT OCCUPIED OR USED FACILITIES.
4. CONDUCT DEMOLITION OPERATIONS TO PREVENT INJURY TO PEOPLE AND DAMAGE TO ADJACENT BUILDINGS AND FACILITIES DESIGNATED TO REMAIN.
5. PROVIDE TEMPORARY BARRICADES AND OTHER FORMS OF PROTECTION AS REQUIRED FOR SAFETY AND SECURITY.
6. PROVIDE BARRIERS AND APPROPRIATE SIGNS WHERE NECESSARY TO RESTRICT PEDESTRIANS FROM WANDERING INTO CONSTRUCTION AREAS. PROVIDE ACCEPTABLE TEMPORARY SECURITY BARRIERS WHERE PHYSICAL SECURITY OF BUILDINGS OR FENCES IS COMPROMISED DUE TO DEMOLITION WORK.
7. PROVIDE TEMPORARY WEATHER PROTECTION DURING INTERVAL BETWEEN DEMOLITION AND REMOVAL OF EXISTING CONSTRUCTION ON EXTERIOR SURFACES AND INSTALLATION OF NEW CONSTRUCTION TO ENSURE NO WATER LEAKAGE OR DAMAGE OCCURS TO STRUCTURE OR INTERIOR AREAS OF EXISTING BUILDING.
8. ERECT TEMPORARY ENCLOSURES AS NECESSARY TO LIMIT DUST. USE WATER AS NECESSARY TO LAY DUST WHEN CHIPPING, CORING, OR SAWING CONCRETE, MASONRY OR SIMILAR MATERIALS. WATER MUST BE CONTROLLED INSIDE BUILDINGS BY DAMMING, OR OTHER CONTAINMENT METHOD.
9. PROVIDE AND MAINTAIN INTERIOR AND EXTERIOR SHORING, BRACING OR STRUCTURAL SUPPORT TO PRESERVE STABILITY AND PREVENT MOVEMENT, SETTLEMENT, OR COLLAPSE OF STRUCTURES AND ADJACENT FACILITIES THAT ARE NOT PART OF DEMOLITION.
10. PERFORM WORK IN SAFE AND SYSTEMATIC MANNER.
11. WEAR PROPER PERSONAL PROTECTIVE EQUIPMENT AT ALL TIMES.
12. COMPLETELY BACKFILL BELOW-GRADE AREAS AND VOIDS RESULTING FROM UTILITY REMOVAL AND OTHER DEMOLITION WORK WITH CLOSE GRADED AGGREGATE OR COHESIVE STRUCTURAL FILL.
13. REPAIR DEMOLITION PERFORMED IN EXCESS OF THAT REQUIRED.
14. PRIOR TO DEMOLITION, ALL SPECIFIC EROSION & SEDIMENT CONTROL PRACTICES SHALL BE INSTALLED.
15. CURB AND GUTTER AND COMPOSITE PAVEMENT SHALL BE REMOVED AND REPLACED TO THE NEAREST JOINT.
16. ALL CONTRACTORS PERFORMING WORK IN THE VILLAGE RIGHT OF WAY, EASEMENTS, OR ON VILLAGE INFRASTRUCTURE SHALL BE PREQUALIFIED BY VOPP FOR THE SCOPE OF WORK TO BE PERFORMED. WORK IN THE RIGHT OF WAY PERMIT IS REQUIRED FOR EACH CONTRACTOR PERFORMING WORK.

NORTH

GRAPHICAL SCALE (FEET)

0 1" = 60' 120'

www.pinnacle-engr.com

DRAFTED: AJS
DESIGNED: AJS
REVIEWED:

PLAN I DESIGN I DELIVER
www.pinnacle-engr.com

PINNACLE ENGINEERING GROUP
ENGINEERING I NATURAL RESOURCES I SURVEYING

WISCONSIN OFFICE:
20725 WATERTOWN ROAD, SUITE 100
BROOKFIELD, WI 53186
(262) 754-8888
CHICAGO I MILWAUKEE I NATIONWIDE

ZILBER INDUSTRIAL 3 @ LAKEVIEW CORPORATE PARK

108TH STREET & GREEN BAY ROAD (STH "31")
VILLAGE OF PLEASANT PRAIRIE, KENOSHA COUNTY

DEMOLITION PLAN

REVISIONS

1	VOPP SITE PLAN SUBMITTAL	03/20/26		
2	VOPP RESUBMITTAL	05/11/26		
3	VOPP RESUBMITTAL	07/17/26		
4	VOPP RESUBMITTAL	10/02/26		

PEG JOB No. 644.00-WI
PEG PM AJS
START DATE 03/20/26
SCALE

SHEET
C-4
C-22

©COPYRIGHT 2019

DEMOLITION PLAN

Z:\PROJECTS\2016\644.00-WI\CAD\SHEETS\644.00-WI-SHEETS-DEMOLITION PLAN.DWG

THESE PLANS AND DESIGNS ARE COPYRIGHT PROTECTED AND MAY NOT BE USED IN WHOLE OR IN PART WITHOUT THE WRITTEN CONSENT OF PINNACLE ENGINEERING GROUP, LLC

PAVING AND LAYOUT NOTES

1. ALL DIMENSIONS ARE FACE OF CURB TO FACE OF CURB OR BUILDING FOUNDATION UNLESS NOTED OTHERWISE. ALL UTILITY DIMENSIONS ARE TO OUTSIDE OF PIPE OR CENTER OF STRUCTURE UNLESS OTHERWISE NOTED. ALL PAVING DIMENSIONS ARE TO FACE OF CURB OR TO EDGE OF PAVEMENT; EXCEPT FOR THE SETBACK FROM PARKING LOTS, MANEUVERING LANES AND FIRE ACCESS LANES, WHERE THE SETBACK IS MEASURED FROM THE BACK OF CURB TO THE PROPERTY LINE.
2. ALL PROPOSED CURB AND GUTTER SHALL BE 18" STANDARD CURB AND GUTTER (SEE DETAIL). UNLESS OTHERWISE NOTED. CURB AND GUTTER DRAINING AWAY FROM THE FACE OF CURB IS NOTED AS REVERSE CURB AND GUTTER.
3. ALL RADII ARE MEASURED TO FACE OF CURB UNLESS NOTED OTHERWISE.
4. BUILDING DIMENSIONS AND ADJACENT PARKING AND UTILITY LAYOUT HAVE BEEN PREPARED BASED UPON ARCHITECTURAL INFORMATION CURRENT AT THE DATE OF THIS DRAWING. SUBSEQUENT ARCHITECTURAL CHANGES MAY EXIST. THEREFORE CONTRACTOR SHALL REFER TO ARCHITECTURAL PLANS FOR PRECISE BUILDING DIMENSIONS AND EXACT UTILITY ENTRANCE LOCATIONS AND NOTIFY THE ARCHITECT AND ENGINEER OF ANY DISCREPANCIES PRIOR TO CONSTRUCTION.
5. THE CONTRACTOR SHALL CONTACT DIGGERS HOTLINE (1-800-242-8511) PRIOR TO ANY WORK TO LOCATE UTILITIES AND SHALL CONTACT THE OWNER SHOULD UTILITIES APPEAR TO BE IN CONFLICT WITH THE PROPOSED IMPROVEMENT.
6. IMPROVEMENTS ADJACENT TO BUILDING IF SHOWN SUCH AS TRUCK DOCK, RETAINING WALLS, SIDEWALKS, CURBING, FENCES, CANOPIES, RAMPS, HANDICAP ACCESS, PLANTERS, DUMPSTERS, AND TRANSFORMERS ETC. HAVE BEEN SHOWN FOR APPROXIMATE LOCATION ONLY. REFER TO ARCHITECTURAL PLANS FOR EXACT LOCATIONS, SPECIFICATIONS, AND DETAILS.
7. REFER TO ELECTRICAL PLANS FOR LIGHTING LOCATIONS, SPECIFICATIONS, AND DETAILS.
8. SEE ADDITIONAL NOTES AND DETAILS ON SITE DIMENSIONAL PLANS AND CONSTRUCTION DETAILS.
9. ALL PAVING SHALL CONFORM TO STATE OF WISCONSIN STANDARD SPECIFICATIONS FOR HIGHWAY & STRUCTURE CONSTRUCTION CURRENT EDITION AND APPLICABLE VILLAGE OF PLEASANT PRAIRIE ORDINANCES, AND SPECIFICATIONS CONTAINED WITHIN THIS PLAN SET.
10. CONTRACTOR SHALL CONSULT STRIPING COLOR WITH OWNER PRIOR TO CONSTRUCTION.
11. PROVIDE CONTRACTOR GRADE ACRYLIC, STRIPING PAINT FOR NEW ASPHALT OR COATED ASPHALT. APPLY MARKING PAINT AT A RATE OF ONE (1) GALLON PER THREE TO FOUR HUNDRED (300-400) LINEAL FEET OF FOUR (4) INCH WIDE STRIPES OR TO MANUFACTURER'S SPECIFICATION, WHICHEVER IS GREATER.
12. THOROUGHLY CLEAN SURFACES FREE OF DIRT, SAND, GRAVEL, OIL AND OTHER FOREIGN MATTER. CONTRACTOR RESPONSIBLE TO INSPECT EXISTING PAVEMENT SURFACES FOR CONDITIONS AND DEFECTS THAT WILL ADVERSELY AFFECT QUALITY OF WORK, AND WHICH CANNOT BE PUT INTO AN ACCEPTABLE CONDITION THROUGH NORMAL PREPARATORY WORK AS SPECIFIED.
13. DO NOT PLACE MARKING OVER UNSOUND PAVEMENTS. IF THESE CONDITIONS EXIST, NOTIFY OWNER. STARTING INSTALLATION CONSTITUTES CONTRACTOR'S ACCEPTANCE OF SURFACE AS SUITABLE FOR INSTALLATION.
14. LAYOUT MARKINGS USING GUIDE LINES, TEMPLATES AND FORMS. STENCILS AND TEMPLATES SHALL BE PROFESSIONALLY MADE TO INDUSTRY STANDARDS. "FREE HAND" PAINTING OF ARROWS, SYMBOLS, OR WORDING SHALL NOT BE ALLOWED. APPLY STRIPES STRAIGHT AND EVEN.
15. PROTECT ADJACENT CURBS, WALKS, FENCES, AND OTHER ITEMS FROM RECEIVING PAINT.
16. BARRICADE MARKED AREAS DURING INSTALLATION AND UNTIL THE MARKING PAINT IS DRIED AND READY FOR TRAFFIC.
17. ASPHALTIC CONCRETE PAVING SPECIFICATIONS-

    CODES AND STANDARDS: THE PLACING, CONSTRUCTION AND COMPOSITION OF THE ASPHALTIC BASE COURSE AND ASPHALTIC CONCRETE SURFACING SHALL BE IN ACCORDANCE WITH THE REQUIREMENTS OF SECTIONS 450, 455, 460 AND 465 OF THE STATE OF WISCONSIN STANDARD SPECIFICATIONS FOR HIGHWAY AND STRUCTURE CONSTRUCTION, LATEST EDITION. HEREAFTER, THIS PUBLICATION WILL BE REFERRED TO AS THE STATE HIGHWAY SPECIFICATIONS.

    WEATHER LIMITATIONS: APPLY TACK COATS WHEN AMBIENT TEMPERATURE IS ABOVE 50° F (10° C) AND WHEN TEMPERATURE HAS NOT BEEN BELOW 35° F (1° C) FOR 12 HOURS IMMEDIATELY PRIOR TO APPLICATION. DO NOT APPLY WHEN BASE IS WET OR CONTAINS EXCESS OF MOISTURE. CONSTRUCT ASPHALTIC CONCRETE SURFACE COURSE WHEN ATMOSPHERIC TEMPERATURE IS ABOVE 40° (4°C) AND WHEN BASE IS DRY AND WHEN WEATHER IS NOT RAINY. BASE COURSE MAY BE PLACED WHEN AIR TEMPERATURE IS ABOVE 30° F (-1° C).

    GRADE CONTROL: ESTABLISH AND MAINTAIN REQUIRED LINES AND ELEVATIONS FOR EACH COURSE DURING CONSTRUCTION.

    CRUSHED AGGREGATE BASE COURSE: THE TOP LAYER OF BASE COURSE SHALL CONFORM TO SECTIONS 301 AND 305, STATE HIGHWAY SPECIFICATIONS.

    BINDER COURSE AGGREGATE: THE AGGREGATE FOR THE BINDER COURSE HALL CONFORM TO SECTIONS 460.2.7 AND 315, STATE HIGHWAY SPECIFICATIONS.

    SURFACE COURSE AGGREGATE: THE AGGREGATE FOR THE SURFACE COURSE SHALL CONFORM TO SECTIONS 460.2.7 AND 465, STATE HIGHWAY SPECIFICATIONS.

    ASPHALTIC MATERIALS: THE ASPHALTIC MATERIALS SHALL CONFORM TO SECTION 455 AND 460, STATE HIGHWAY SPECIFICATIONS.

    SURFACE PREPARATION: NOTIFY CONTRACTOR OF UNSATISFACTORY CONDITIONS. DO NOT BEGIN PAVING WORK UNTIL DEFICIENT SUBBASE AREAS HAVE BEEN CORRECTED AND ARE READY TO RECEIVE PAVING.

ALL WORK WITHIN PUBLIC R.O.W. AND PUBLIC EASEMENTS SHALL CONFORM TO THE VILLAGE OF PLEASANT PRAIRIE CHAPTER 405 CONSTRUCTION SPECIFICATIONS.

EXISTING CONDITIONS SURVEY:

EXISTING CONDITIONS SURVEY PROVIDED BY PINNACLE ENGINEERING GROUP. ALTHOUGH PEG HAS NO REASON TO BELIEVE THE SURVEY IS INACCURATE, PEG MAKES NO WARRANTS THAT EXISTING INFORMATION CONTAINED WITHIN THESE PLANS IS ALL-INCLUSIVE OR ACCURATE. CONTRACTOR SHALL UNDERTAKE NECESSARY EFFORTS TO VERIFY THE EXISTING CONDITIONS PRIOR TO THE START OF MATERIAL PROCUREMENT AND CONSTRUCTION EFFORTS/ACTIVITIES.

FUTURE AREAS ARE SHOWN FOR ILLUSTRATIVE PURPOSES ONLY. ANY FUTURE PARKING LOT EXPANSION AND/OR TRUCK DOORS/DOCKS OR TRAILING PARKING AREAS SHALL MEET CURRENT REQUIREMENTS IN EFFECT AT THE TIME OF THE PROPOSED EXPANSION.

SHEET C-6

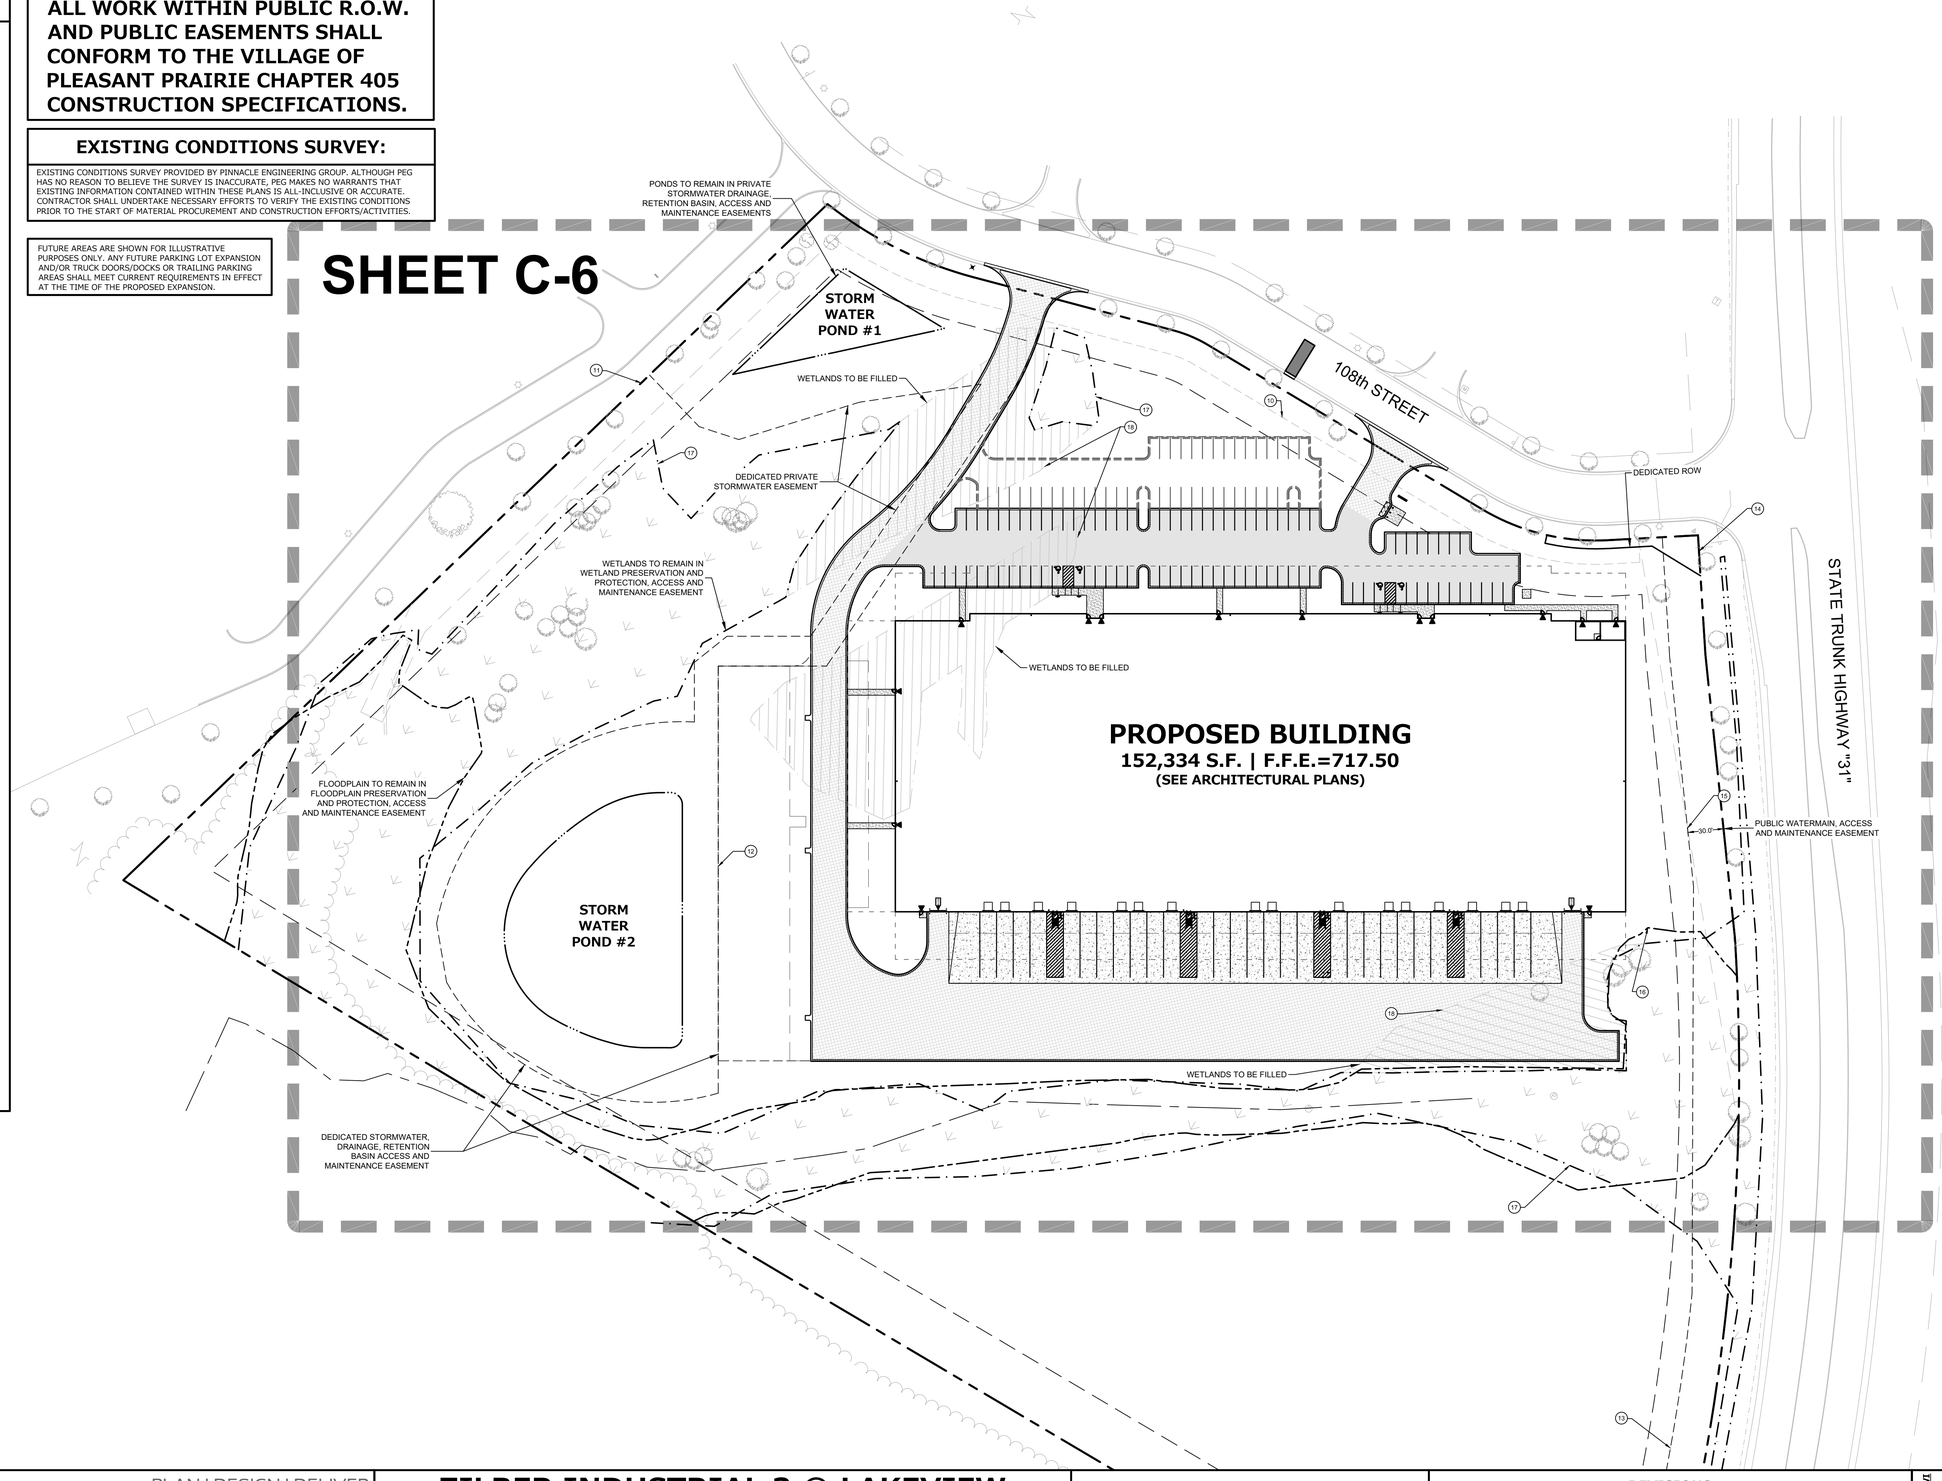

NORTH

GRAPHICAL SCALE (FEET)

0 1" = 60' 120'

REVIEWED:
DESIGNED: AJS
DRAFTED: AJS

PLAN I DESIGN I DELIVER
www.pinnacle-engr.com

PINNACLE ENGINEERING GROUP
ENGINEERING I NATURAL RESOURCES I SURVEYING

WISCONSIN OFFICE:
20725 WATERTOWN ROAD, SUITE 100
BROOKFIELD, WI 53186
(262) 754-8888
CHICAGO I MILWAUKEE : NATIONWIDE

ZILBER INDUSTRIAL 3 @ LAKEVIEW CORPORATE PARK

108TH STREET & GREEN BAY ROAD (STH "31")
VILLAGE OF PLEASANT PRAIRIE, KENOSHA COUNTY

PAVING & LAYOUT PLAN OVERVIEW

REVISIONS

1	VOPP SITE PLAN SUBMITTAL	03/20/26			
2	VOPP RESUBMITTAL	05/11/26			
3	VOPP RESUBMITTAL	07/17/26			
4	VOPP RESUBMITTAL	10/02/26			

PEG JOB No. 644.00-WI
PEG PM AJS
START DATE 03/20/26
SCALE 1" = 60'

SHEET
C-5
C-22

©COPYRIGHT 2019

PAVING & LAYOUT PLAN OVERVIEW

www.pinnacle-engr.com

Z:\PROJECTS\2016\644.00-WI\CAD\SHEETS\644.00-WI-SHEETS-PAVING AND LAYOUT.DWG

THESE PLANS AND DESIGNS ARE COPYRIGHT PROTECTED AND MAY NOT BE USED IN WHOLE OR IN PART WITHOUT THE WRITTEN CONSENT OF PINNACLE ENGINEERING GROUP, LLC

LEGEND

- (A) **18" CURB & GUTTER** (SEE DETAIL, SHEET C-17)
- (B) **18" REVERSE CURB & GUTTER** (SEE DETAIL, SHEET C-17)
- (C) **TAPER CURB HEAD** (SEE DETAIL, SHEET C-17)
- (D) **BUILDING DOOR SLAB** (2% MAX SLOPE WITHIN 5 FT OF MAN DOOR)
- (E) **CONCRETE FLUME** (SEE DETAIL, SHEET C-16)
- (F) **CURB TRANSITION** (FROM REGULAR TO REVERSE STYLE)
- (G) **4" SOLID WHITE STRIPE**
- (H) **4" DIAGONAL WHITE STRIPE AT 45° SPACED 2' O.C.**
- (I) **R7-8 HANDICAP PARKING SIGN** (SEE DETAIL, SHEET C-7)
- (J) **ADA STALL INSIGNIA** (WHITE)
- (K) **PLATFORM AND STAIRS** (SEE ARCH. PLANS FOR DETAILS)
- (#) **PARKING COUNT** (FOR INFORMATION ONLY, NOT TO BE PAINTED)

LIGHT DUTY PAVEMENT (SEE DETAIL, SHEET C-17)

HEAVY DUTY PAVEMENT (SEE DETAIL, SHEET C-17)

HEAVY DUTY CONCRETE PAVEMENT (SEE DETAIL, SHEET C-17)

LIGHT DUTY CONCRETE PAVEMENT (SEE DETAIL, SHEET C-17)

COMPOSITE PAVEMENT SECTION TO MATCH EXISTING (SEE DETAIL, SHEET C-17)

GRAPHICAL SCALE (FEET)
0 1" = 40' 80'

ALL WORK WITHIN PUBLIC R.O.W. AND PUBLIC EASEMENTS SHALL CONFORM TO THE VILLAGE OF PLEASANT PRAIRIE CHAPTER 405 CONSTRUCTION SPECIFICATIONS.

EXISTING CONDITIONS SURVEY:

EXISTING CONDITIONS SURVEY PROVIDED BY PINNACLE ENGINEERING GROUP. ALTHOUGH PEG HAS NO REASON TO BELIEVE THE SURVEY IS INACCURATE, PEG MAKES NO WARRANTS THAT EXISTING INFORMATION CONTAINED WITHIN THESE PLANS IS ALL-INCLUSIVE OR ACCURATE. CONTRACTOR SHALL UNDERTAKE NECESSARY EFFORTS TO VERIFY THE EXISTING CONDITIONS PRIOR TO THE START OF MATERIAL PROCUREMENT AND CONSTRUCTION EFFORTS/ACTIVITIES.

FUTURE AREAS ARE SHOWN FOR ILLUSTRATIVE PURPOSES ONLY. ANY FUTURE PARKING LOT EXPANSION AND/OR TRUCK DOORS/DOCKS OR TRAILING PARKING AREAS SHALL MEET CURRENT REQUIREMENTS IN EFFECT AT THE TIME OF THE PROPOSED EXPANSION.

PROPOSED BUILDING
152,334 S.F. | F.F.E.=717.50
(SEE ARCHITECTURAL PLANS)

STORM WATER POND #1
N.W.L.= 706.00
1-YR PEAK WSE= 707.21
2-YR PEAK WSE= 707.47
10-YR PEAK WSE= 708.32
100-YR PEAK WSE= 709.77

STORM WATER POND #2
N.W.L.=705.00
1-YR PEAK WSE=706.63
2-YR PEAK WSE=706.90
10-YR PEAK WSE=707.82
100-YR PEAK WSE=708.70

108th STREET

STATE TRUNK HIGHWAY "31"

RELOCATED SALVAGED LIGHT POLE
DRIVEWAY ENTRANCE WITH 30" DEPRESSED CURB
BUILDING SETBACK LINE PER DOC. 1204261
20' GENERAL UTILITY EASEMENT PER C.S.M. NO. 2273
25' STORM SEWER, ACCESS AND MAINTENANCE EASEMENT PER C.S.M. NO. 2273
WETLANDS TO BE FILLED
PROPOSED WETLAND IMPACTS 17,275 S.F. (0.40 AC.)
DEDICATED PRIVATE STORMWATER EASEMENT
PROPOSED FUTURE PARKING AREA (48 STALLS)
PROPOSED PUMPER PAD
MONUMENT SIGN SEE ENLARGED VIEW "C" ON SHEET C-7
PROPERTY LINE
PROPOSED TRANSFORMER PAD
SEE ENLARGED VIEW "A" ON SHEET C-7
SEE ENLARGED VIEW "B" ON SHEET C-7
WETLANDS TO BE FILLED
PROPOSED FUTURE PARKING AREA (35 STALLS)
PROPOSED FUTURE PARKING AREA (23 STALLS)
50' HIGHWAY SETBACK PER C.S.M. NO. 2273
NO ACCESS PER C.S.M. NO. 2273
30' WATERMAIN ACCESS AND MAINTENANCE EASEMENT
PROPOSED FUTURE PARKING IN EMPTY DOCK SPACES (OVERFLOW PARKING ONLY)
THICKENED ASPHALT EDGE (SEE DETAIL)
50' x 500' VISION CORNER EASEMENT PER C.S.M. NO. 2273
PROPOSED 100-YEAR FLOODPLAIN POST-PROJECT
DEDICATED STORMWATER, DRAINAGE, RETENTION BASIN ACCESS AND MAINTENANCE EASEMENT
BUILDING SETBACK LINE PER DOC. 1204261
PROPOSED WETLAND IMPACTS 48,384 S.F. (1.11 AC.)
FLOODPLAIN POST-PROJECT
WETLAND BOUNDARY POST-PROJECT

REVIEWED:
DESIGNED:
DRAFTED:

PINNACLE ENGINEERING GROUP
PLAN | DESIGN | DELIVER
www.pinnacle-engr.com
ENGINEERING | NATURAL RESOURCES | SURVEYING
WISCONSIN OFFICE:
20725 WATERTOWN ROAD, SUITE 100
BROOKFIELD, WI 53186
(262) 754-8888
CHICAGO | MILWAUKEE | NATIONWIDE

ZILBER INDUSTRIAL 3 @ LAKEVIEW CORPORATE PARK
108TH STREET & GREEN BAY ROAD (STH "31")
VILLAGE OF PLEASANT PRAIRIE, KENOSHA COUNTY

LAYOUT PLAN

REVISIONS

PEG JOB No. 644.00-WI
PEG PM JLJ
START DATE 02-11-26
SCALE 1" = 40'

SHEET C-6 C-22

©COPYRIGHT 2019

LAYOUT PLAN

www.pinnacle-engr.com

Z:\PROJECTS\2016\644.00-WI\CAD\SHEETS\644.00-WI-SHEETS-PAVING AND LAYOUT.DWG

THESE PLANS AND DESIGNS ARE COPYRIGHT PROTECTED AND MAY NOT BE USED IN WHOLE OR IN PART WITHOUT THE WRITTEN CONSENT OF PINNACLE ENGINEERING GROUP, LLC

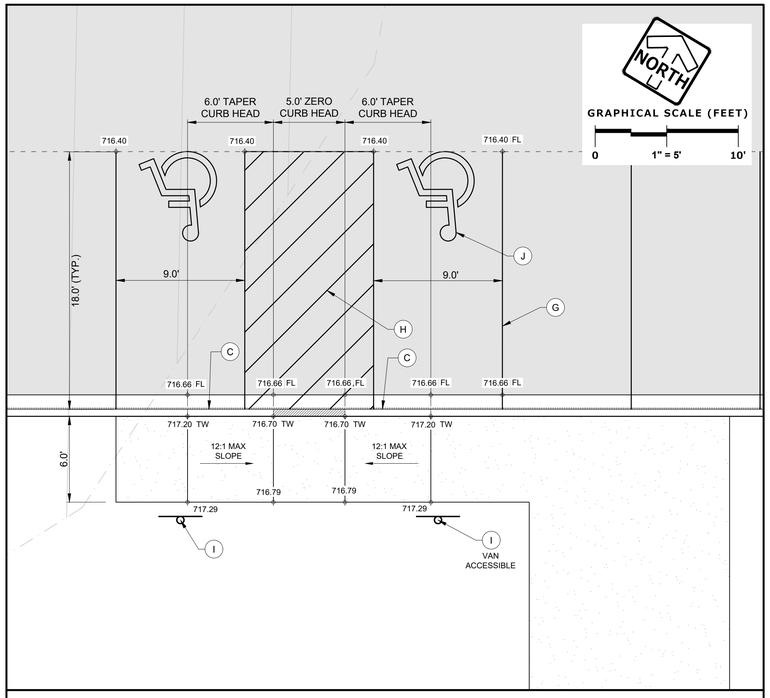

ENLARGED VIEW "A" DETAILS

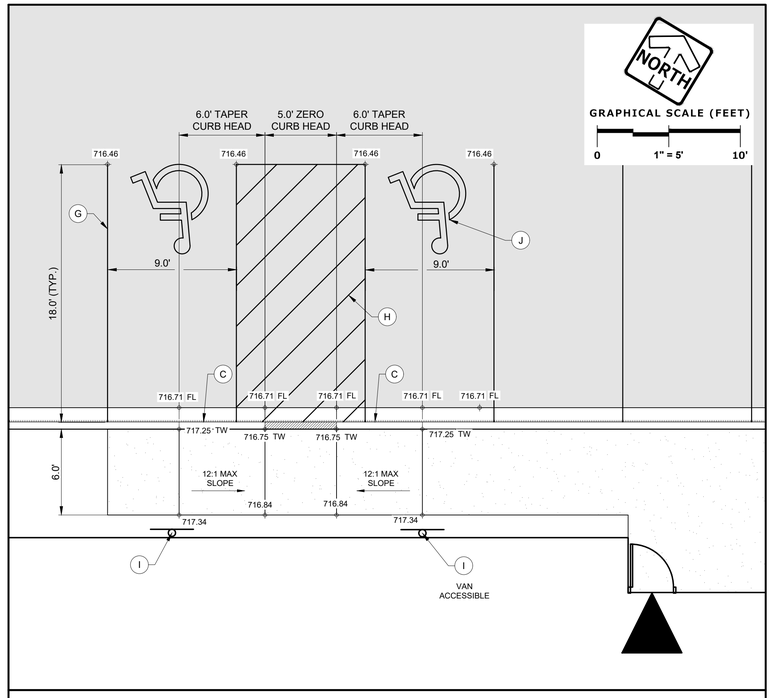

ENLARGED VIEW "B" DETAILS

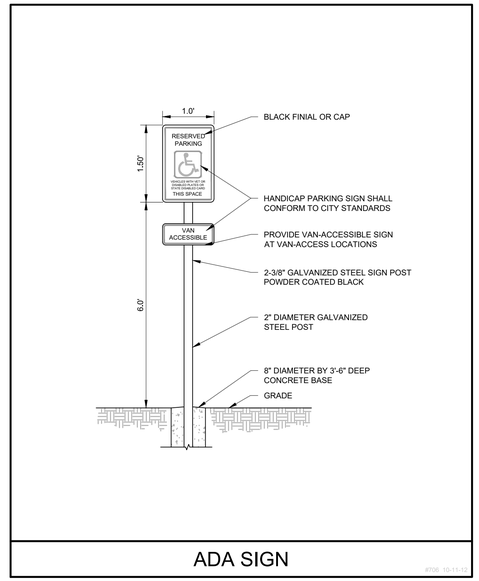

ADA SIGN

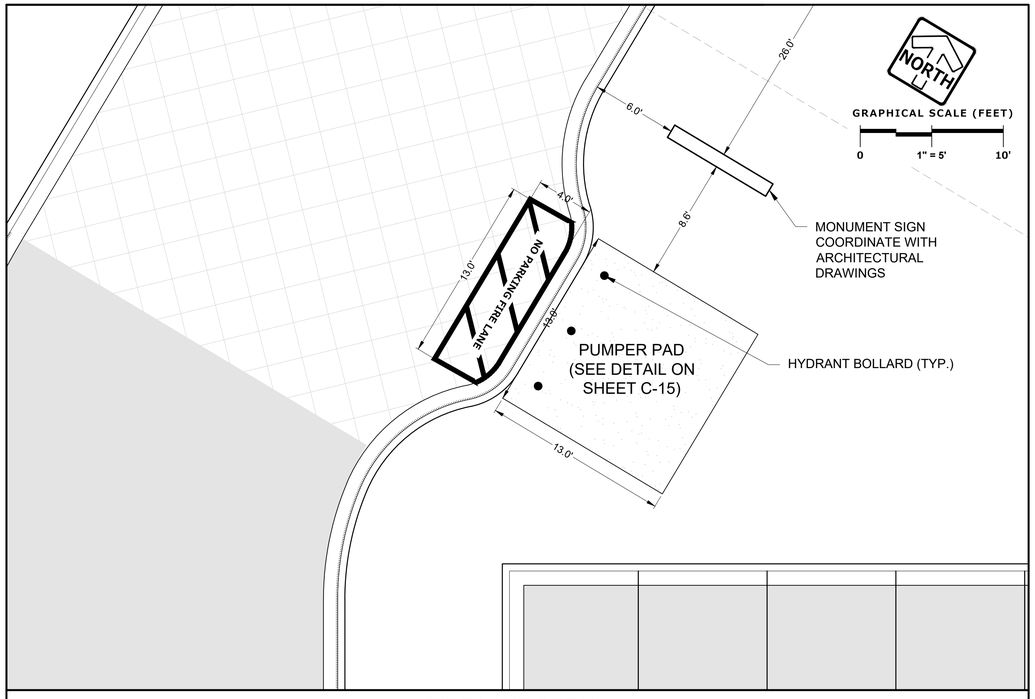

FIRE LANE DETAIL

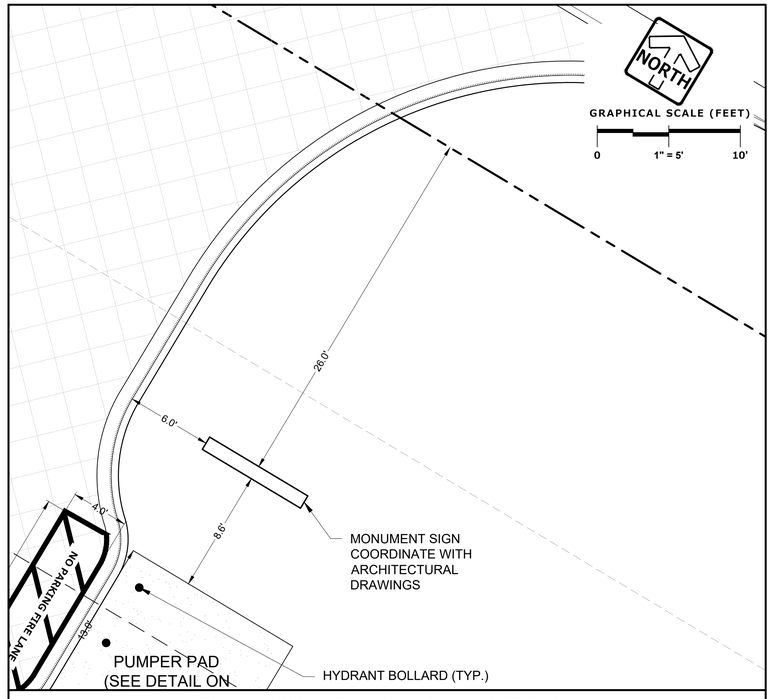

ENLARGED VIEW "C" MONUMENT SIGN

LEGEND

- (A) **18" CURB & GUTTER** (SEE DETAIL, SHEET C-17)
- (B) **18" REVERSE CURB & GUTTER** (SEE DETAIL, SHEET C-17)
- (C) **TAPER CURB HEAD** (SEE DETAIL, SHEET C-17)
- (D) **BUILDING DOOR SLAB** (2% MAX SLOPE WITHIN 5 FT OF MAN DOOR)
- (E) **CONCRETE FLUME** (SEE DETAIL, SHEET C-16)
- (F) **CURB TRANSITION** (FROM REGULAR TO REVERSE STYLE)
- (G) **4" SOLID WHITE STRIPE**
- (H) **4" DIAGONAL WHITE STRIPE AT 45° SPACED 2' O.C.**
- (I) **R7-8 HANDICAP PARKING SIGN** (SEE DETAIL, SHEET C-7)
- (J) **ADA STALL INSIGNIA** (WHITE)
- (K) **PLATFORM AND STAIRS** (SEE ARCH. PLANS FOR DETAILS)
- (#) **PARKING COUNT** (FOR INFORMATION ONLY, NOT TO BE PAINTED)
- **LIGHT DUTY PAVEMENT** (SEE DETAIL, SHEET C-17)
- **HEAVY DUTY PAVEMENT** (SEE DETAIL, SHEET C-17)
- **HEAVY DUTY CONCRETE PAVEMENT** (SEE DETAIL, SHEET C-17)
- **LIGHT DUTY CONCRETE PAVEMENT** (SEE DETAIL, SHEET C-17)
- **COMPOSITE PAVEMENT SECTION TO MATCH EXISTING** (SEE DETAIL, SHEET C-17)

ALL WORK WITHIN PUBLIC R.O.W. SHALL CONFORM TO THE VILLAGE OF PLEASANT PRAIRIE STANDARDS.

EXISTING CONDITIONS SURVEY:

EXISTING CONDITIONS SURVEY PROVIDED BY PINNACLE ENGINEERING GROUP. ALTHOUGH PEG HAS NO REASON TO BELIEVE THE SURVEY IS INACCURATE, PEG MAKES NO WARRANTS THAT EXISTING INFORMATION CONTAINED WITHIN THESE PLANS IS ALL-INCLUSIVE OR ACCURATE. CONTRACTOR SHALL UNDERTAKE NECESSARY EFFORTS TO VERIFY THE EXISTING CONDITIONS PRIOR TO THE START OF MATERIAL PROCUREMENT AND CONSTRUCTION EFFORTS/ACTIVITIES.

DRAFTED: AJS
DESIGNED: AJS
REVIEWED:

PLAN | DESIGN | DELIVER
www.pinnacle-engr.com
PINNACLE ENGINEERING GROUP
ENGINEERING | NATURAL RESOURCES | SURVEYING
WISCONSIN OFFICE:
20725 WATERTOWN ROAD, SUITE 100
BROOKFIELD, WI 53186
(262) 754-8888
CHICAGO | MILWAUKEE : NATIONWIDE

ZILBER INDUSTRIAL 3 @ LAKEVIEW CORPORATE PARK

108TH STREET & GREEN BAY ROAD (STH "31")
VILLAGE OF PLEASANT PRAIRIE, KENOSHA COUNTY

PAVING & LAYOUT PLAN

REVISIONS

1	VOPP SITE PLAN SUBMITTAL	03/20/26	
2	VOPP RESUBMITTAL	05/11/26	
3	VOPP RESUBMITTAL	07/17/26	
4	VOPP RESUBMITTAL	10/02/26	

PEG JOB No. 644.00-WI
PEG PM AJS
START DATE 03/20/26
SCALE N.T.S.

SHEET
C-7
C-22

©COPYRIGHT 2019

PAVING & LAYOUT PLAN

www.pinnacle-engr.com

Z:\PROJECTS\2016\644.00-WI\CAD\SHEETS\644.00-WI-SHEETS-PAVING AND LAYOUT.DWG

THESE PLANS AND DESIGNS ARE COPYRIGHT PROTECTED AND MAY NOT BE USED IN WHOLE OR IN PART WITHOUT THE WRITTEN CONSENT OF PINNACLE ENGINEERING GROUP, LLC

GRADING NOTES

1. CONTRACTOR SHALL VERIFY ALL GRADES, ENSURE ALL AREAS DRAIN PROPERLY AND REPORT ANY DISCREPANCIES TO PINNACLE ENGINEERING GROUP PRIOR TO THE START OF ANY CONSTRUCTION ACTIVITIES.
2. ALL EXISTING CONTOURS REPRESENT EXISTING SURFACE GRADES UNLESS OTHERWISE NOTED. ALL PROPOSED GRADES SHOWN ARE FINISH SURFACE GRADES UNLESS OTHERWISE NOTED.
3. SPOT ELEVATIONS REPRESENT THE GRADE ALONG THE CURB FLANGE UNLESS OTHERWISE NOTED.
4. ALL EXCAVATIONS AND MATERIAL PLACEMENT SHALL BE COMPLETED TO DESIGN ELEVATIONS AS DEPICTED IN THE PLANS.

   CONTRACTOR SHALL ASSUME SOLE RESPONSIBILITY FOR THE COMPUTATION(S) OF ALL GRADING QUANTITIES. WHILE PEG ATTEMPTS TO PROVIDE A COST EFFECTIVE APPROACH TO BALANCE EARTHWORK, GRADING DESIGN IS BASED ON MANY FACTORS, INCLUDING SAFETY, AESTHETICS, AND COMMON ENGINEERING STANDARD OF CARE, THEREFORE NO GUARANTEE CAN BE MADE FOR A BALANCED SITE.

   THE CONTRACTOR MAY SOLICIT APPROVAL FROM ENGINEER/OWNER TO ADJUST FINAL GRADES FROM DESIGN GRADES TO PROVIDE AN OVERALL SITE BALANCE AS A RESULT OF FIELD CONDITIONS.
5. GRADING ACTIVITIES SHALL BE IN A MANNER TO ALLOW POSITIVE DRAINAGE ACROSS DISTURBED SOILS, WHICH MAY INCLUDE EXCAVATION OF TEMPORARY DITCHES TO PREVENT PONDING, AND IF NECESSARY PUMPING TO ALLEVIATE PONDING. CONTRACTOR SHALL PREVENT SURFACE WATER FROM ENTERING INTO EXCAVATIONS. IN NO WAY SHALL OWNER BE RESPONSIBLE FOR REMEDIATION OF UNSUITABLE SOILS CREATED/ORIGINATED AS A RESULT OF IMPROPER SITE GRADING OR SEQUENCING. CONTRACTOR SHALL SEQUENCE GRADING ACTIVITIES TO LIMIT EXPOSURE OF DISTURBED SOILS DUE TO WEATHER.
6. THE CONTRACTOR IS RESPONSIBLE FOR MEETING MINIMUM COMPACTION STANDARDS. THE CONTRACTOR SHALL NOTIFY ENGINEER/OWNER IF PROPER COMPACTION CANNOT BE OBTAINED. THE PROJECT'S GEOTECHNICAL CONSULTANT SHALL DETERMINE WHICH IN-SITU SOILS ARE TO BE CONSIDERED UNSUITABLE SOILS. THE ENGINEER/OWNER AND GEOTECHNICAL TESTING CONSULTANT WILL DETERMINE IF REMEDIAL MEASURES WILL BE NECESSARY.
7. IN THE EVENT THAT ANY MOISTURE-DENSITY TEST(S) FAIL TO MEET SPECIFICATION REQUIREMENTS, THE CONTRACTOR SHALL PERFORM CORRECTIVE WORK AS NECESSARY TO BRING THE MATERIAL INTO COMPLIANCE AND RETEST THE FAILED AREA AT NO COST TO THE OWNER.
8. WITH THE AUTHORIZATION OF THE ENGINEER/OWNER, MATERIAL THAT IS TOO WET TO PERMIT PROPER COMPACTION MAY BE SPREAD ON FILL AREAS IN AN EFFORT TO DRY. CONTRACTOR SHALL CLEARLY FIELD MARK THE EXTERIOR LIMITS OF SPREAD MATERIAL WITH PAINTED LATH AND SUBMIT A PLAN TO THE ENGINEER/OWNER THAT IDENTIFIES THE LIMITS. UNDER NO CONDITION SHALL THE SPREAD MATERIAL DEPTH EXCEED THE MOST RESTRICTIVE OF: THE EFFECTIVE TREATMENT DEPTH OF MACHINERY THAT WILL BE USED TO TURNOVER THE SPREAD MATERIAL; OR THE MAXIMUM COMPACTION LIFT DEPTH.
9. THE CONTRACTOR SHALL IMMEDIATELY NOTIFY ENGINEER/OWNER IF GROUNDWATER IS ENCOUNTERED DURING EXCAVATION.
10. CONTRACTOR IS SOLELY RESPONSIBLE FOR THE DESIGN AND CONSTRUCTION OF ADEQUATE AND SAFE TEMPORARY SHORING, BRACING, RETENTION STRUCTURES, AND EXCAVATIONS.
11. THE SITE SHALL BE COMPLETED TO WITHIN 0.10-FT (+/-) OF THE PROPOSED GRADES AS INDICATED WITHIN THE PLANS PRIOR TO PLACEMENT OF TOPSOIL OR STONE. CONTRACTOR IS ENCOURAGED TO SEQUENCE CONSTRUCTION SUCH THAT THE SITE IS DIVIDED INTO SMALLER AREAS TO ALLOW STABILIZATION OF DISTURBED SOILS IMMEDIATELY UPON COMPLETION OF INDIVIDUAL SMALLER AREAS.
12. CONTRACTOR SHALL CONTACT "DIGGER'S HOTLINE" FOR LOCATIONS OF ALL EXISTING UTILITIES PRIOR TO COMMENCEMENT OF ANY CONSTRUCTION ACTIVITIES AND SHALL BE RESPONSIBLE FOR PROTECTING SAID UTILITIES FROM ANY DAMAGE DURING CONSTRUCTION.
13. CONTRACTOR SHALL PROTECT INLETS AND ADJACENT PROPERTIES WITH SILT FENCING OR APPROVED EROSION CONTROL METHODS UNTIL CONSTRUCTION IS COMPLETED. CONTRACTOR SHALL PLACE SILT FENCING AT DOWN SLOPE SIDE OF GRADING LIMITS.
14. CONTRACTOR SHALL BE RESPONSIBLE FOR DAMAGE TO ANY EXISTING FACILITIES OR UTILITIES. ANY DAMAGE SHALL BE REPAIRED TO THE OWNER'S SATISFACTION AT THE EXPENSE OF THE CONTRACTOR.
15. WORK WITHIN ANY ROADWAY RIGHT-OF-WAY SHALL BE COORDINATED WITH THE APPROPRIATE MUNICIPAL OFFICIAL PRIOR TO COMMENCEMENT OF ANY CONSTRUCTION ACTIVITIES. CONTRACTOR SHALL BE RESPONSIBLE FOR OBTAINING ALL NECESSARY PERMITS AND FEES. GRADING WITHIN RIGHT-OF-WAY IS SUBJECT TO APPROVAL BY SAID OFFICIALS. RESTORATION OF RIGHT-OF-WAY IS CONSIDERED INCIDENTAL AND SHALL BE INCLUDED IN THE COST OF GRADING. RESTORATION SHALL INCLUDE ALL ITEMS NECESSARY TO RESTORE RIGHT-OF-WAY IN-KIND INCLUDING LANDSCAPING.
16. CONTRACTOR SHALL COMPLY WITH ALL VILLAGE OF PLEASANT PRAIRIE, KENOSHA COUNTY AND WISDOT CONSTRUCTION STANDARDS/ORDINANCES.
17. LANDSCAPE AND TURF AREAS SHALL HAVE A MINIMUM OF 4-INCH TOPSOIL REPLACEMENT.
18. TOPSOIL BERMING SHALL ACHIEVE 90% STANDARD PROCTOR DENSITY AT 3%(±) OPTIMUM MOISTURE CONTENT.
19. SURVEY BENCHMARKS AND MAPPING HAS BEEN PROVIDED BY PINNACLE ENGINEERING GROUP. IN NO WAY DOES PEG WARRANT THE BASEMAP IS ALL INCLUSIVE OR REPRESENTATIVE OF ACTUAL CONDITIONS. CONTRACTOR SHALL PROVIDE CHECKS AS NECESSARY TO VERIFY THE BASEMAP CONTENT AND ACCURACY.

ALL WORK WITHIN PUBLIC R.O.W. AND PUBLIC EASEMENTS SHALL CONFORM TO THE VILLAGE OF PLEASANT PRAIRIE CHAPTER 405 CONSTRUCTION SPECIFICATIONS.

EXISTING CONDITIONS SURVEY:

EXISTING CONDITIONS SURVEY PROVIDED BY PINNACLE ENGINEERING GROUP. ALTHOUGH PEG HAS NO REASON TO BELIEVE THE SURVEY IS INACCURATE, PEG MAKES NO WARRANTS THAT EXISTING INFORMATION CONTAINED WITHIN THESE PLANS IS ALL-INCLUSIVE OR ACCURATE. CONTRACTOR SHALL UNDERTAKE NECESSARY EFFORTS TO VERIFY THE EXISTING CONDITIONS PRIOR TO THE START OF MATERIAL PROCUREMENT AND CONSTRUCTION EFFORTS/ACTIVITIES.

FUTURE AREAS ARE SHOWN FOR ILLUSTRATIVE PURPOSES ONLY. ANY FUTURE PARKING LOT EXPANSION AND/OR TRUCK DOORS/DOCKS OR TRAILING PARKING AREAS SHALL MEET CURRENT REQUIREMENTS IN EFFECT AT THE TIME OF THE PROPOSED EXPANSION.

SHEET C-9

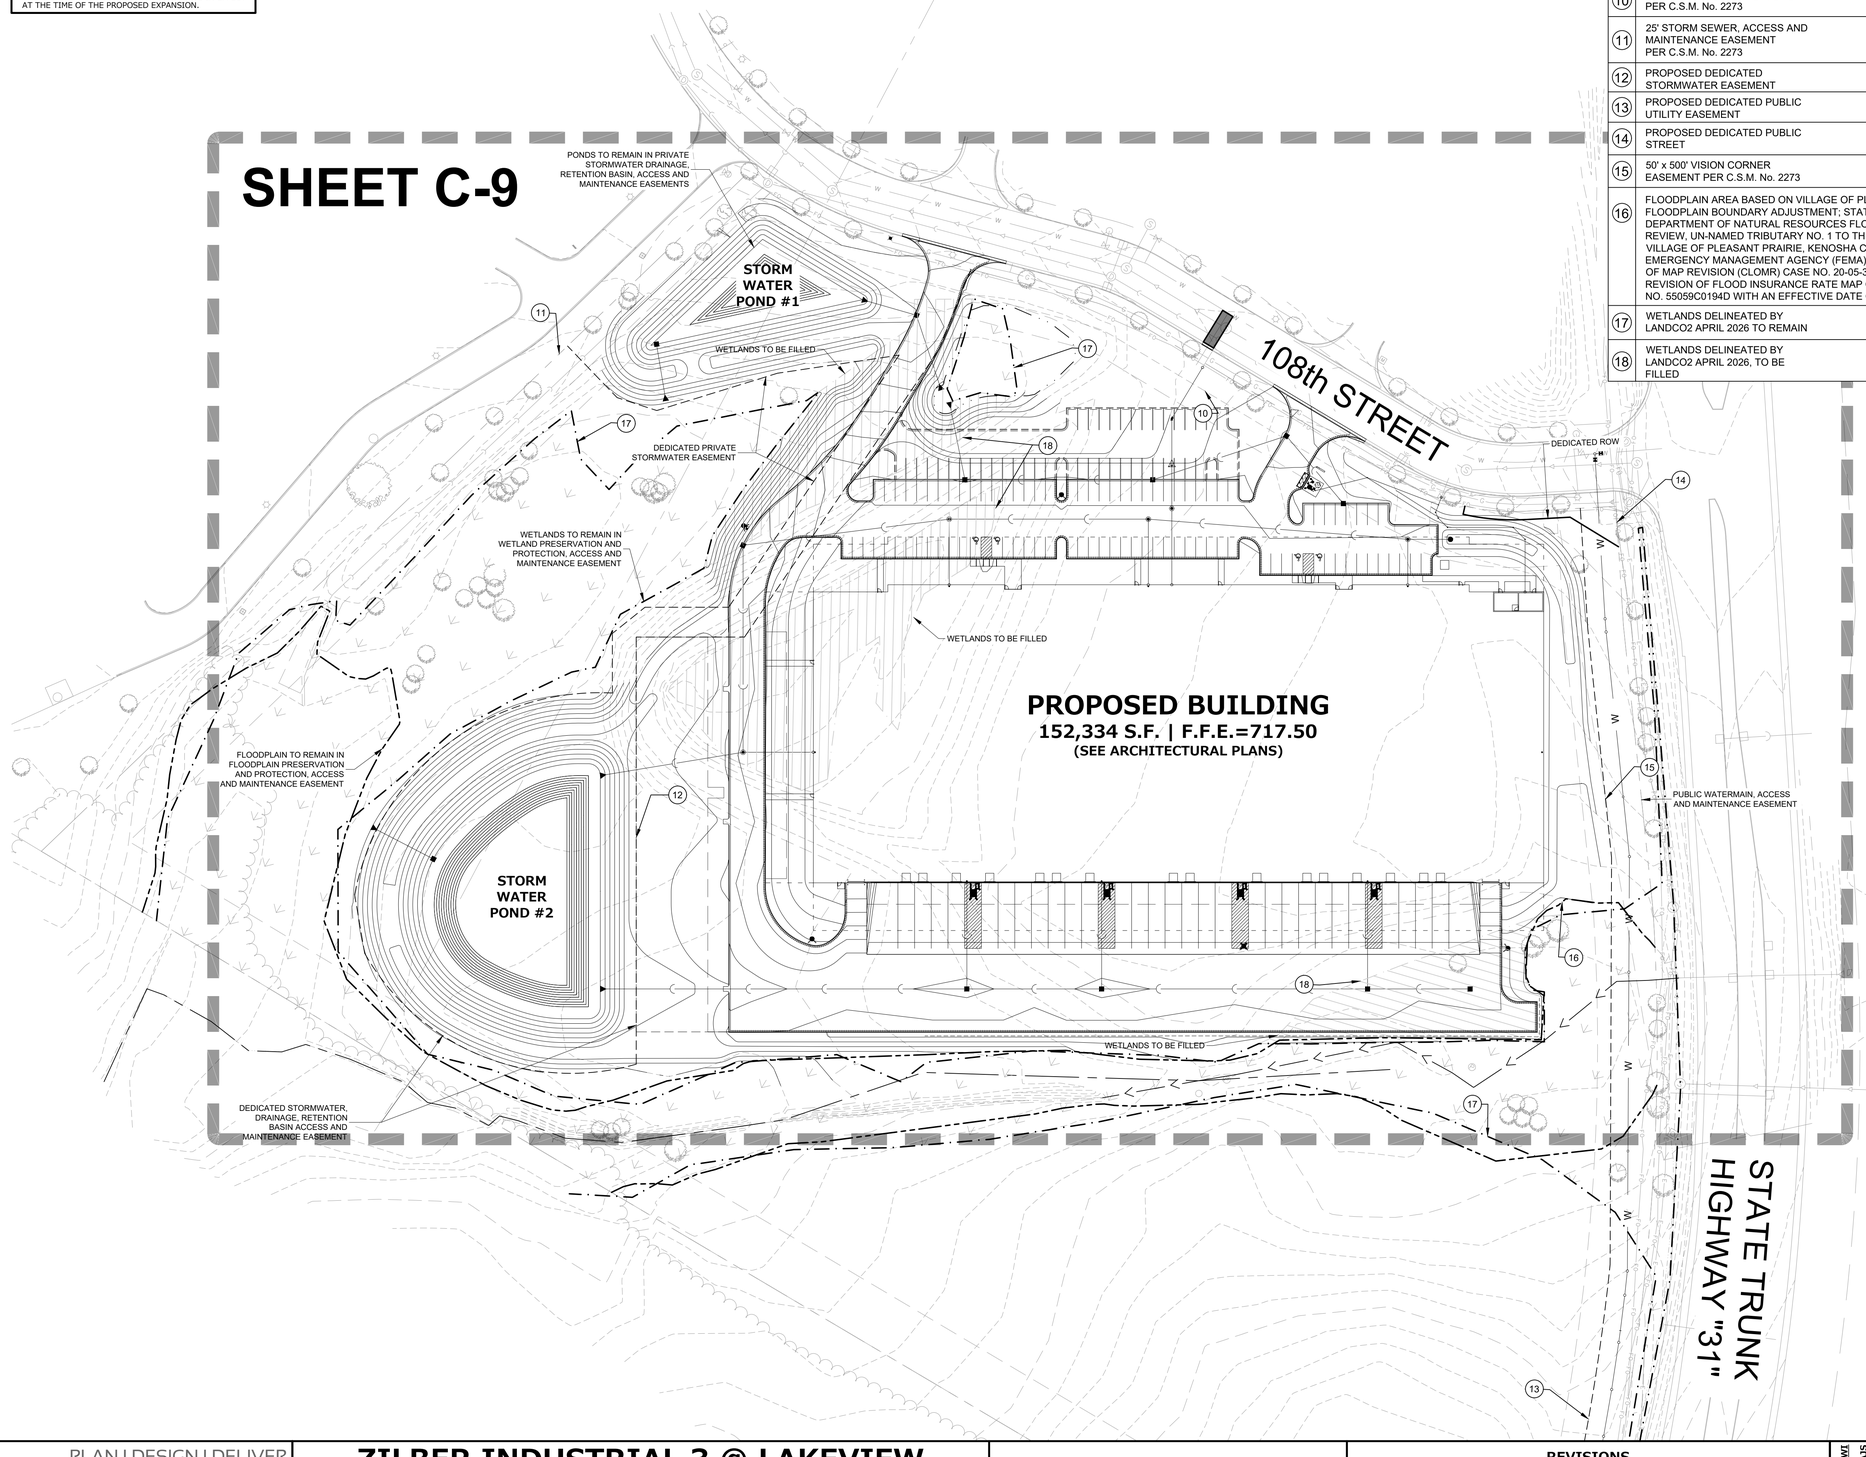

No.	DESCRIPTION
10	20' GENERAL UTILITY EASEMENT PER C.S.M. No. 2273
11	25' STORM SEWER, ACCESS AND MAINTENANCE EASEMENT PER C.S.M. No. 2273
12	PROPOSED DEDICATED STORMWATER EASEMENT
13	PROPOSED DEDICATED PUBLIC UTILITY EASEMENT
14	PROPOSED DEDICATED PUBLIC STREET
15	50' x 500' VISION CORNER EASEMENT PER C.S.M. No. 2273
16	FLOODPLAIN AREA BASED ON VILLAGE OF PLEASANT PRAIRIE FLOODPLAIN BOUNDARY ADJUSTMENT; STATE OF WISCONSIN DEPARTMENT OF NATURAL RESOURCES FLOODPLAIN ANALYSIS REVIEW, UN-NAMED TRIBUTARY NO. 1 TO THE DES PLAINS RIVER, VILLAGE OF PLEASANT PRAIRIE, KENOSHA COUNTY; AND FEDERAL EMERGENCY MANAGEMENT AGENCY (FEMA) CONDITIONAL LETTER OF MAP REVISION (CLOMR) CASE NO. 20-05-3166R FOR THE REVISION OF FLOOD INSURANCE RATE MAP COMMUNITY PANEL NO. 55059C0194D WITH AN EFFECTIVE DATE OF JUNE 19, 2012
17	WETLANDS DELINEATED BY LANDCO2 APRIL 2026 TO REMAIN
18	WETLANDS DELINEATED BY LANDCO2 APRIL 2026, TO BE FILLED

NORTH

GRAPHICAL SCALE (FEET)

0 1" = 60' 120'

REVIEWED:
DESIGNED: AJS
DRAFTED: AJS

PLAN | DESIGN | DELIVER
www.pinnacle-engr.com

PINNACLE ENGINEERING GROUP
ENGINEERING | NATURAL RESOURCES | SURVEYING

WISCONSIN OFFICE:
20725 WATERTOWN ROAD, SUITE 100
BROOKFIELD, WI 53186
(262) 754-8888
CHICAGO | MILWAUKEE - NATIONWIDE

ZILBER INDUSTRIAL 3 @ LAKEVIEW CORPORATE PARK

108TH STREET & GREEN BAY ROAD (STH "31")
VILLAGE OF PLEASANT PRAIRIE, KENOSHA COUNTY

GRADING PLAN OVERVIEW

REVISIONS

1	VOPP SITE PLAN SUBMITTAL	03/20/26
2	VOPP RESUBMITTAL	05/11/26
3	VOPP RESUBMITTAL	07/17/26
4	VOPP RESUBMITTAL	10/02/26

PEG JOB No. 644.00-WI
PES PM AJS
START DATE 03/20/26
SCALE 1" = 60'

SHEET
C-8
C-22

© COPYRIGHT 2019

GRADING PLAN OVERVIEW

www.pinnacle-engr.com

Z:\PROJECTS\2016\644.00-WI\CAD\SHEETS\644.00-WI-SHEETS-GRADING.DWG

THESE PLANS AND DESIGNS ARE COPYRIGHT PROTECTED AND MAY NOT BE USED IN WHOLE OR IN PART WITHOUT THE WRITTEN CONSENT OF PINNACLE ENGINEERING GROUP, LLC

LEGEND

- STORM SEWER MANHOLE
- STORM SEWER CATCH BASIN- ROUND CASTING
- STORM SEWER CATCH BASIN- RECTANGULAR CASTING
- PROPOSED FLARED END SECTION
- 749 — PROPOSED CONTOUR
- 750.00 — SPOT ELEVATION
- GRASS / PAVEMENT — DIRECTION OF SURFACE FLOW
- OVERFLOW RELIEF ROUTING
- CURB AND GUTTER
- REVERSE CURB AND GUTTER

ALL WORK WITHIN PUBLIC R.O.W. AND PUBLIC EASEMENTS SHALL CONFORM TO THE VILLAGE OF PLEASANT PRAIRIE CHAPTER 405 CONSTRUCTION SPECIFICATIONS.

EXISTING CONDITIONS SURVEY:

EXISTING CONDITIONS SURVEY PROVIDED BY PINNACLE ENGINEERING GROUP. ALTHOUGH PEG HAS NO REASON TO BELIEVE THE SURVEY IS INACCURATE, PEG MAKES NO WARRANTS THAT EXISTING INFORMATION CONTAINED WITHIN THESE PLANS IS ALL-INCLUSIVE OR ACCURATE. CONTRACTOR SHALL UNDERTAKE NECESSARY EFFORTS TO VERIFY THE EXISTING CONDITIONS PRIOR TO THE START OF MATERIAL PROCUREMENT AND CONSTRUCTION EFFORTS/ACTIVITIES.

FUTURE AREAS ARE SHOWN FOR ILLUSTRATIVE PURPOSES ONLY. ANY FUTURE PARKING LOT EXPANSION AND/OR TRUCK DOORS/DOCKS OR TRAILING PARKING AREAS SHALL MEET CURRENT REQUIREMENTS IN EFFECT AT THE TIME OF THE PROPOSED EXPANSION.

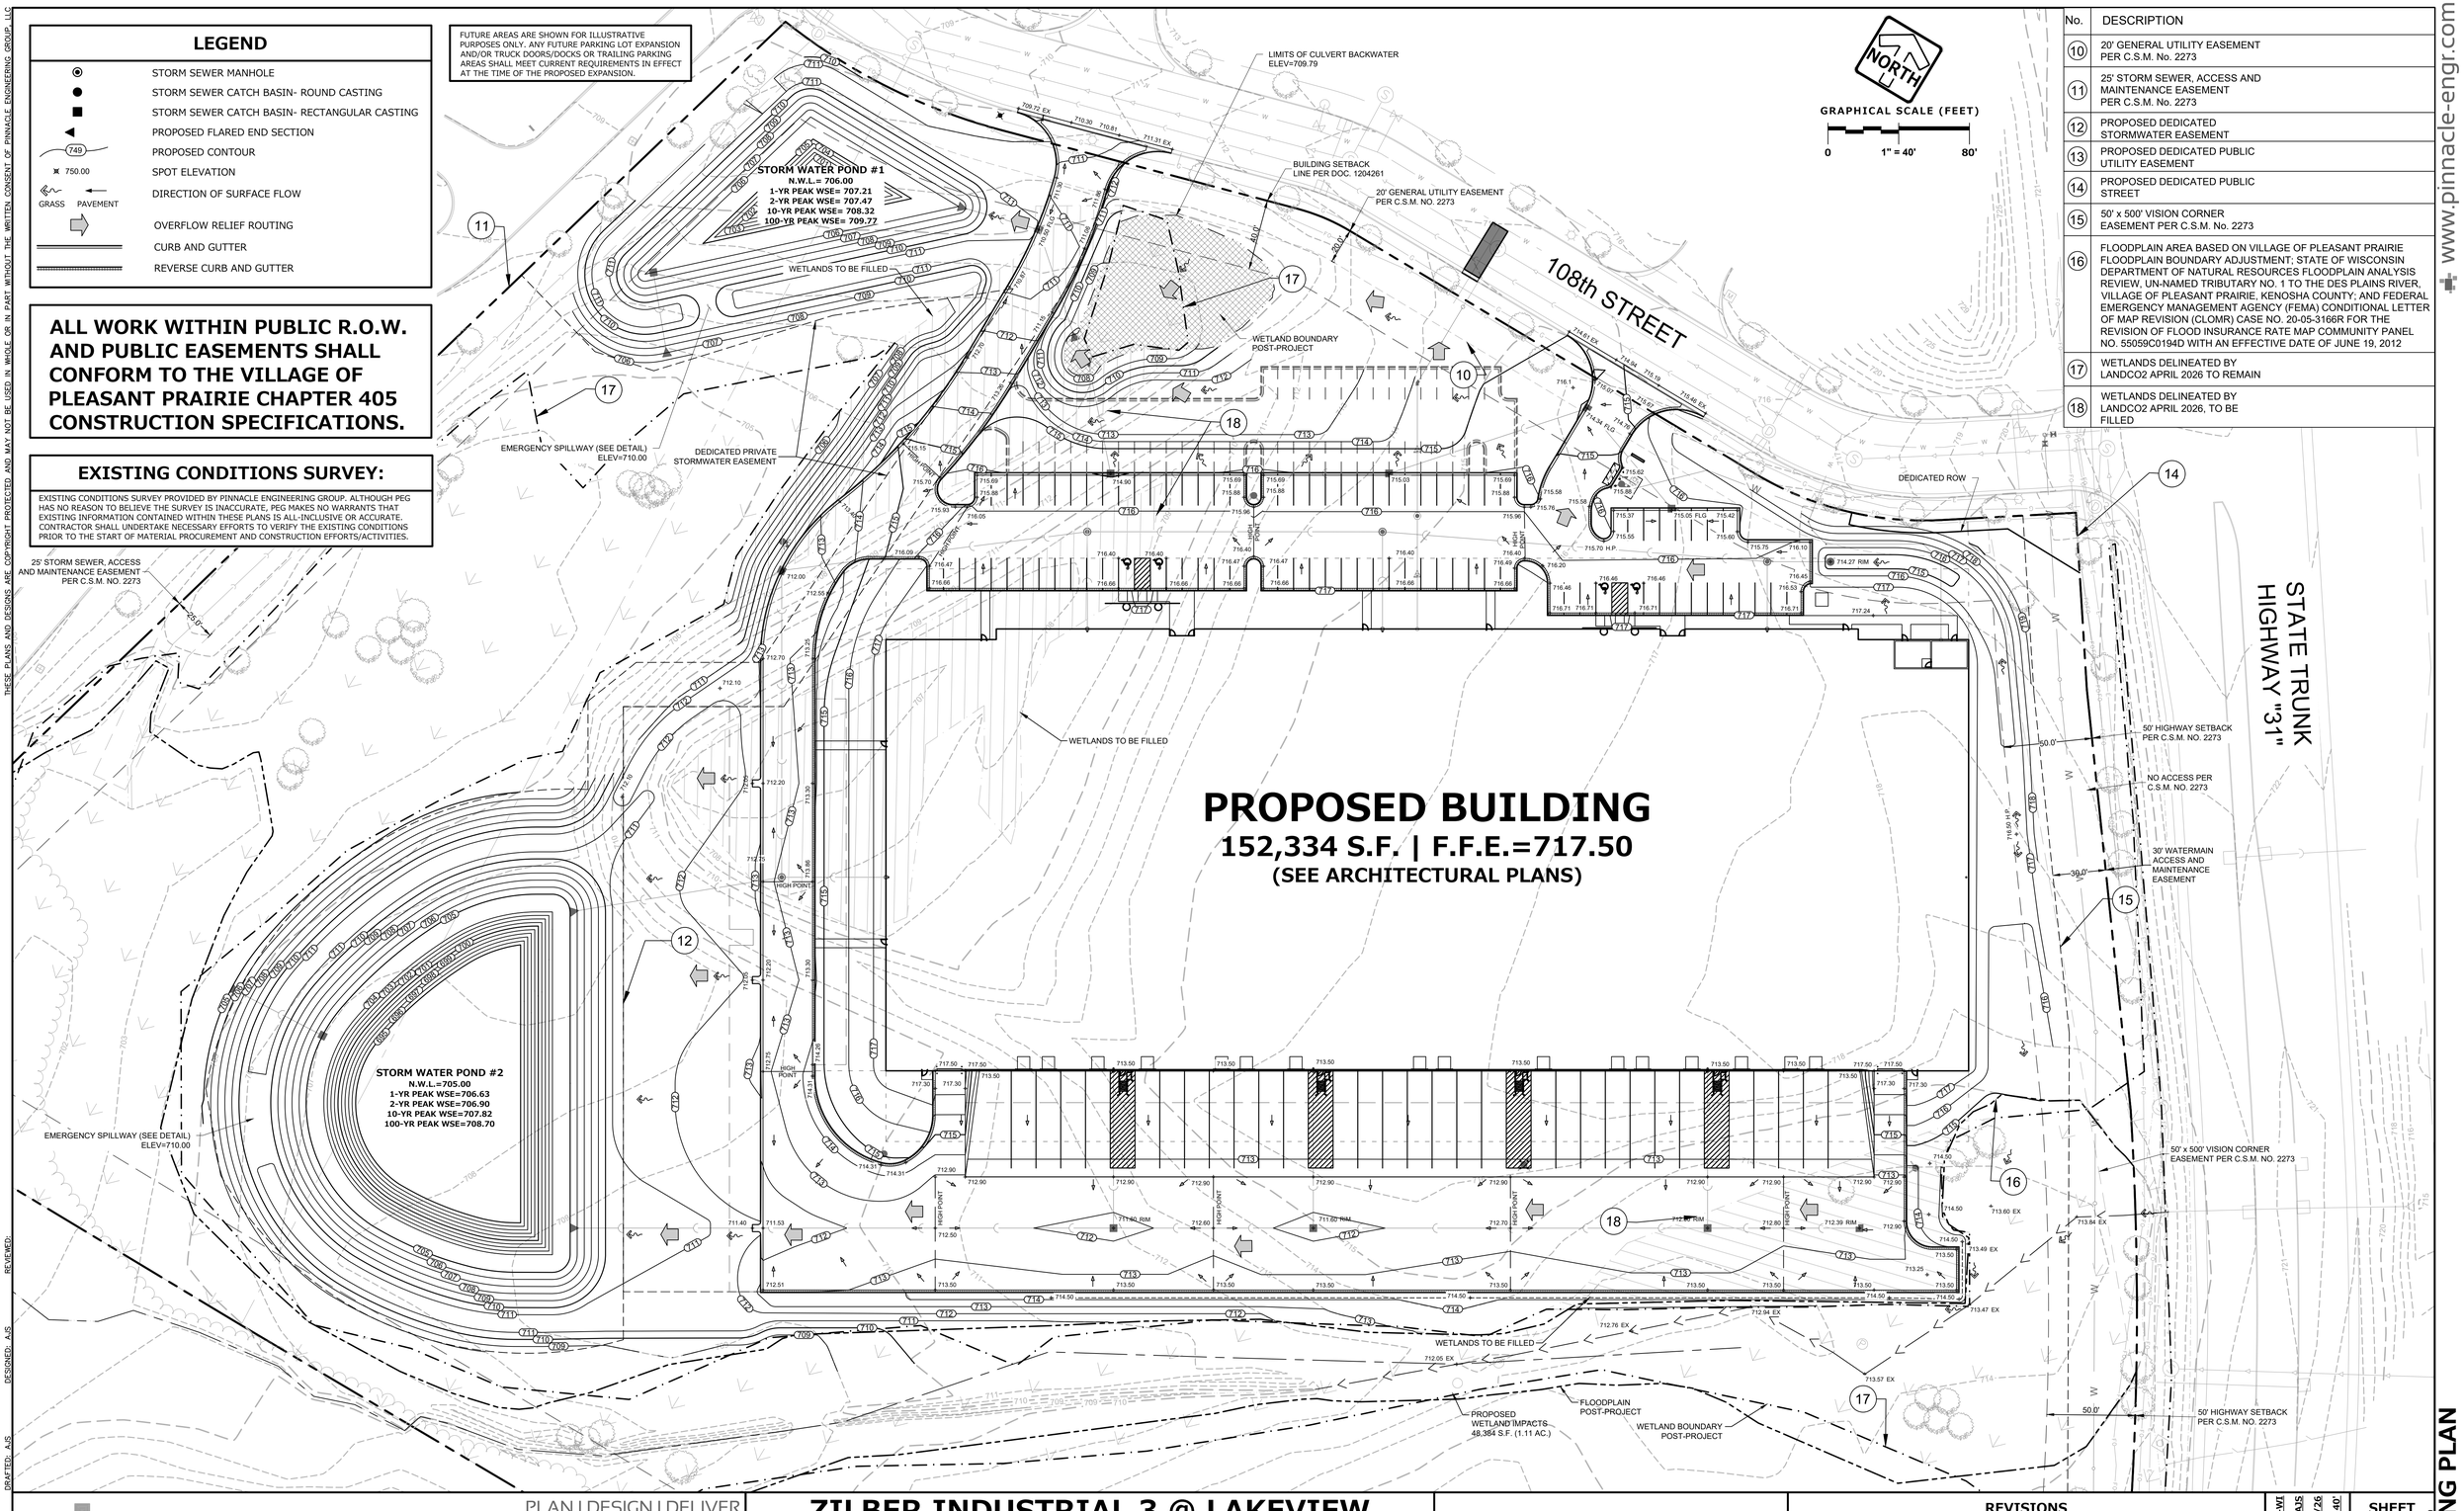

No.	DESCRIPTION
10	20' GENERAL UTILITY EASEMENT PER C.S.M. No. 2273
11	25' STORM SEWER, ACCESS AND MAINTENANCE EASEMENT PER C.S.M. No. 2273
12	PROPOSED DEDICATED STORMWATER EASEMENT
13	PROPOSED DEDICATED PUBLIC UTILITY EASEMENT
14	PROPOSED DEDICATED PUBLIC STREET
15	50' x 500' VISION CORNER EASEMENT PER C.S.M. No. 2273
16	FLOODPLAIN AREA BASED ON VILLAGE OF PLEASANT PRAIRIE FLOODPLAIN BOUNDARY ADJUSTMENT; STATE OF WISCONSIN DEPARTMENT OF NATURAL RESOURCES FLOODPLAIN ANALYSIS REVIEW, UN-NAMED TRIBUTARY NO. 1 TO THE DES PLAINS RIVER, VILLAGE OF PLEASANT PRAIRIE, KENOSHA COUNTY; AND FEDERAL EMERGENCY MANAGEMENT AGENCY (FEMA) CONDITIONAL LETTER OF MAP REVISION (CLOMR) CASE NO. 20-05-3166R FOR THE REVISION OF FLOOD INSURANCE RATE MAP COMMUNITY PANEL NO. 55059C0194D WITH AN EFFECTIVE DATE OF JUNE 19, 2012
17	WETLANDS DELINEATED BY LANDCO2 APRIL 2026 TO REMAIN
18	WETLANDS DELINEATED BY LANDCO2 APRIL 2026, TO BE FILLED

www.pinnacle-engr.com

REVIEWED:
DESIGNED: AJS
DRAFTED: AJS

PLAN | DESIGN | DELIVER
www.pinnacle-engr.com

PINNACLE ENGINEERING GROUP
ENGINEERING | NATURAL RESOURCES | SURVEYING

WISCONSIN OFFICE:
20725 WATERTOWN ROAD, SUITE 100
BROOKFIELD, WI 53186
(262) 754-8888
CHICAGO | MILWAUKEE :NATIONWIDE

ZILBER INDUSTRIAL 3 @ LAKEVIEW CORPORATE PARK

108TH STREET & GREEN BAY ROAD (STH "31")
VILLAGE OF PLEASANT PRAIRIE, KENOSHA COUNTY

GRADING PLAN

REVISIONS

1	VOPP SITE PLAN SUBMITTAL	03/20/26
2	VOPP RESUBMITTAL	05/11/26
3	VOPP RESUBMITTAL	07/17/26
4	VOPP RESUBMITTAL	10/02/26

PEG JOB No. 644.00-WI
PEG PM AJS
START DATE 03/20/26
SCALE 1" = 40'

SHEET
C-9
C-22

GRADING PLAN

©COPYRIGHT 2019

Z:\PROJECTS\2016\644.00-WI\CAD\SHEETS\644.00-WI-SHEETS-GRADING.DWG

THESE PLANS AND DESIGNS ARE COPYRIGHT PROTECTED AND MAY NOT BE USED IN WHOLE OR IN PART WITHOUT THE WRITTEN CONSENT OF PINNACLE ENGINEERING GROUP, LLC

EXISTING CONDITIONS SURVEY:

EXISTING CONDITIONS SURVEY PROVIDED BY PINNACLE ENGINEERING GROUP. ALTHOUGH PEG HAS NO REASON TO BELIEVE THE SURVEY IS INACCURATE, PEG MAKES NO WARRANTS THAT EXISTING INFORMATION CONTAINED WITHIN THESE PLANS IS ALL-INCLUSIVE OR ACCURATE. CONTRACTOR SHALL UNDERTAKE NECESSARY EFFORTS TO VERIFY THE EXISTING CONDITIONS PRIOR TO THE START OF MATERIAL PROCUREMENT AND CONSTRUCTION EFFORTS/ACTIVITIES.

PUBLIC WORKS COORDINATION

1. CONTRACTOR SHALL COORDINATE AND SCHEDULE INSPECTIONS FOR WATER CONNECTIONS AND UTILITY ADJUSTMENTS WITH THE PUBLIC WORKS DEPARTMENT. CONNECTION / ADJUSTMENT WORK SHALL NOT COMMENCE UNTIL PUBLIC WORKS HAS BEEN CONTACTED AND INSPECTIONS SCHEDULED.
2. ALL PUBLIC WATER VALVES SHALL BE OPERATED BY OR UNDER THE SUPERVISION OF THE PUBLIC WORKS DEPARTMENT. CONTRACTOR SHALL COORDINATE WITH THE PUBLIC WORKS DEPARTMENT.
3. CONTRACTOR SHALL COORDINATE THEIR WORK AND SCHEDULE INSPECTIONS FOR THE SEWER CONNECTION TO THE PUBLIC SANITARY SEWER WITH THE VILLAGE PUBLIC WORKS DEPARTMENT. CONNECTION WORK SHALL NOT COMMENCE UNTIL PUBLIC WORKS HAS BEEN CONTACTED AND INSPECTIONS SCHEDULED.

ALL WORK WITHIN PUBLIC R.O.W. AND PUBLIC EASEMENTS SHALL CONFORM TO THE VILLAGE OF PLEASANT PRAIRIE CHAPTER 405 CONSTRUCTION SPECIFICATIONS.

FUTURE AREAS ARE SHOWN FOR ILLUSTRATIVE PURPOSES ONLY. ANY FUTURE PARKING LOT EXPANSION AND/OR TRUCK DOORS/DOCKS OR TRAILING PARKING AREAS SHALL MEET CURRENT REQUIREMENTS IN EFFECT AT THE TIME OF THE PROPOSED EXPANSION.

UTILITY NOTES

1. EXISTING UTILITIES ARE SHOWN FOR INFORMATIONAL PURPOSES ONLY AND ARE NOT GUARANTEED TO BE ACCURATE OR ALL INCLUSIVE. CONTRACTOR IS RESPONSIBLE FOR VERIFYING THE TYPE, LOCATION, SIZE AND ELEVATION OF UNDERGROUND UTILITIES AS THEY DEEM NECESSARY FOR PROPOSED UTILITY CONNECTIONS AND/OR TO AVOID DAMAGE THERETO. CONTRACTOR SHALL CALL "DIGGER'S HOTLINE" PRIOR TO ANY CONSTRUCTION.
2. ALL UTILITY WORK SHALL BE DONE IN ACCORDANCE WITH THE STANDARD SPECIFICATIONS FOR SEWER AND WATER CONSTRUCTION IN WISCONSIN (LATEST EDITION AND ADDENDUM) AND ALL STATE AND LOCAL CODES AND SPECIFICATIONS. IT IS THE CONTRACTORS RESPONSIBILITY TO DETERMINE WHICH SPECIFICATIONS AND CODES APPLY, AND TO COORDINATE ALL CONSTRUCTION ACTIVITIES WITH THE APPROPRIATE LOCAL AND STATE AUTHORITIES.
3. UTILITY CONSTRUCTION AND SPECIFICATIONS SHALL COMPLY WITH THE VILLAGE OF PLEASANT PRAIRIE SPECIAL PROVISIONS AND WISCONSIN DEPARTMENT OF SAFETY AND PROFESSIONAL SERVICES SPS 382.
4. LENGTHS OF PROPOSED UTILITIES ARE TO CENTER OF STRUCTURES OR FITTINGS AND MAY VARY SLIGHTLY FROM PLAN. LENGTHS ARE SHOWN FOR CONTRACTOR CONVENIENCE ONLY. CONTRACTOR IS SOLELY RESPONSIBLE FOR COMPUTATIONS OF MATERIALS REQUIRED TO COMPLETE WORK. LENGTHS SHALL BE FIELD VERIFIED DURING CONSTRUCTION.
5. CONTRACTOR SHALL ADJUST AND/OR RECONSTRUCT EXISTING UTILITY COVERS (SUCH AS MANHOLE COVERS, VALVE BOX COVERS, ETC.) TO MATCH FINISHED GRADES OF THE AREAS DISTURBED DURING CONSTRUCTION.
6. CONTRACTOR SHALL FIELD VERIFY LOCATIONS, ELEVATIONS, AND SIZES OF PROPOSED UTILITIES AND CHECK ALL UTILITY CROSSINGS FOR CONFLICTS PRIOR TO ATTEMPTING CONNECTIONS AND BEGINNING UTILITY CONSTRUCTION AND NOTIFY THE OWNER OF ANY DISCREPANCIES OR CONFLICTS.
7. ALL NEW ON-SITE SANITARY, STORM AND WATER UTILITIES SHALL BE PRIVATELY OWNED AND MAINTAINED BY THE PROPERTY OWNER, UNLESS OTHERWISE NOTED ON THE PLANS.
8. THE CONTRACTOR SHALL CONTACT THE VILLAGE OF PLEASANT PRAIRIE PUBLIC WORKS DEPARTMENT 48-HOURS IN ADVANCE OF SANITARY, WATER AND STORM CONNECTIONS TO THE VILLAGE-OWNED SYSTEM TO SCHEDULE INSPECTIONS.
9. ROUTING OF GAS, ELECTRIC AND TELEPHONE SERVICES ARE SHOWN ON THE PLANS AND SUBJECT TO CHANGE BASED UPON FINAL REVIEW AND APPROVAL BY RESPECTIVE UTILITY COMPANIES AND OWNER. CONTRACTOR SHALL CONTACT EACH UTILITY COMPANY AND COORDINATE FINAL LOCATIONS FOR ALL UTILITY SERVICES PRIOR TO START OF CONSTRUCTION.
10. IT IS THE CONTRACTOR'S RESPONSIBILITY TO COORDINATE WITH THE PROPER AUTHORITIES FOR ANY REQUIRED PERMITS, AUTHORIZATIONS, TRAFFIC CONTROL AND ANY PERMIT FEES REQUIRED.
11. FIELD TILE CONNECTION - ALL FIELD TILE ENCOUNTERED DURING CONSTRUCTION SHALL BE INCLUDED IN THE UNIT PRICE(S) FOR STORM SEWER. TILE LINES CROSSED BY THE TRENCH SHALL BE REPLACED WITH THE SAME MATERIAL AS THE STORM SEWER.
12. THE CONTRACTOR IS RESPONSIBLE FOR THE SIZE, TYPE AND NUMBER OF WATER MAIN BENDS, HORIZONTAL AND VERTICAL, REQUIRED TO COMPLETE CONSTRUCTION. COST FOR BENDS, HORIZONTAL AND VERTICAL, SHALL BE INCIDENTAL AND INCLUDED IN THE OVERALL COST OF THE CONTRACT.
13. STORM SEWER SPECIFICATIONS -

    PIPE - REINFORCED CONCRETE PIPE (RCP) SHALL MEET THE REQUIREMENTS OF ASTM CLASS C-76 WITH RUBBER GASKET JOINTS CONFORMING TO ASTM C-443. STRENGTH CLASSIFICATIONS SHALL BE IN ACCORDANCE WITH THE FOLLOWING:

HEIGHT OF COVER (FEET):	0-2	2-3	3-6	6-15	15-25	25+
MINIMUM CONCRETE PIPE CLASSIFICATION:	IV	III	II	III	IV	ENGINEER TO SPECIFY

    HIGH DENSITY DUAL-WALL POLYETHYLENE N-12 CORRUGATED PIPE (HDPE) SHALL BE AS MANUFACTURED BY ADS OR EQUAL WITH WATER TIGHT JOINTS, AND SHALL MEET THE REQUIREMENTS OF AASHTO DESIGNATION M-294 TYPE "S", OR SCHEDULE 40 POLYVINYL CHLORIDE (PVC), AS NOTED. IF HDPE PIPE IS USED FOR POND OUTFALLS, A MINIMUM OF THREE (3) SECTIONS (2 STRAPS) SHALL BE STRAPPED TOGETHER.

    INLETS/CATCH BASINS - INLETS/CATCH BASINS SHALL BE CONSTRUCTED IN ACCORDANCE WITH FILE NO. 25 OF THE "STANDARD SPECIFICATIONS" WITH A 1'-8" X 2'-6" MAXIMUM OPENING. FRAME & GRATE SHALL BE NEENAH R-1580 WITH TYPE D GRATE, OR EQUAL. FRAME & GRATE FOR TRUCK DOCK LOCATIONS SHALL BE NEENAH R-1878-B76, OR EQUAL. CURB FRAME & GRATE SHALL BE NEENAH R-3067-V, OR EQUAL. THE SUMP DEPTH (VERTICAL DISTANCE FROM THE BASE OF THE STRUCTURE TO OUTFALL INVERT OF THE PIPE) SHALL BE 18" MIN. STRUCTURE SHOP DRAWINGS SHALL BE SUBMITTED TO PINNACLE ENGINEERING GROUP FOR REVIEW AND APPROVAL PRIOR TO MANUFACTURING AND INSTALLATION.

    BACKFILL AND BEDDING - STORM SEWER SHALL BE CONSTRUCTED WITH GRAVEL BACKFILL AND CLASS "B" BEDDING IN ALL PAVED AREAS AND TO A POINT 5 FEET BEYOND THE EDGE OF PAVEMENT. TRENCHES RUNNING PARALLEL TO AND LESS THAN 5 FEET FROM THE EDGE OF PAVEMENT SHALL ALSO REQUIRE GRAVEL BACKFILL. LANDSCAPED AREAS MAY BE BACKFILLED WITH EXCAVATED MATERIAL IN CONFORMANCE WITH SECTION 8.43.5 OF THE "STANDARD SPECIFICATIONS".

    MANHOLE FRAMES AND COVERS - MANHOLE FRAMES AND COVERS SHALL BE NEENAH R-1660 WITH TYPE "B" SELF SEALING LIDS, NON-ROCKING OR EQUAL .

14. WATER MAIN SPECIFICATIONS -

    PIPE - WATER MAIN SHALL BE POLYVINYL CHLORIDE (PVC) PIPE MEETING THE REQUIREMENTS OF AWWA STANDARD C-900, CLASS 150, DR-18, WITH CAST IRON O.D. AND INTEGRAL ELASTOMERIC BELL AND SPIGOT JOINTS. VALVES AND VALVE BOXES - GATE VALVES SHALL BE AWWA GATE VALVES MEETING THE REQUIREMENTS OF AWWA C-500 AND CHAPTER 8.27.0 OF THE "STANDARD SPECIFICATIONS". GATE VALVES AND VALVE BOXES SHALL CONFORM TO LOCAL PLUMBING ORDINANCES.

    HYDRANTS - HYDRANTS SHALL CONFORM TO THE SPECIFICATIONS OF THE VILLAGE OF PLEASANT PRAIRIE. THE DISTANCE FROM THE GROUND LINE TO THE CENTERLINE OF THE LOWEST NOZZLE AND THE LOWEST CONNECTION OF THE FIRE DEPARTMENT SHALL BE NO LESS THAN 18-INCHES AND NO GREATER THAN 23-INCHES.

    BEDDING AND COVER MATERIAL - PIPE BEDDING AND COVER MATERIAL SHALL BE SAND, CRUSHED STONE CHIPS OR CRUSHED STONE SCREENINGS CONFORMING TO CHAPTER 8.43.2 OF THE "STANDARD SPECIFICATIONS".

    BACKFILL - BACKFILL MATERIAL AND INSTALLATION SHALL BE IN ACCORDANCE WITH CHAPTER 2.6.0 OF THE "STANDARD SPECIFICATIONS". GRAVEL BACKFILL IS REQUIRED IN ALL PAVED AREAS AND TO A POINT 5 FEET BEYOND THE EDGE OF PAVEMENT. TRENCHES RUNNING PARALLEL TO AND LESS THAN 5 FEET FROM THE EDGE OF PAVEMENT SHALL ALSO REQUIRE GRAVEL BACKFILL. LANDSCAPED AREAS MAY BE BACKFILLED WITH EXCAVATED MATERIAL IN CONFORMANCE WITH SECTION 8.43.5 OF THE "STANDARD SPECIFICATIONS".

15. SANITARY SEWER SPECIFICATIONS -

    PIPE - SANITARY SEWER PIPE MATERIAL SHALL BE POLYVINYL CHLORIDE (PVC) MEETING REQUIREMENTS OF ASTM D 3034, SDR-35, WITH INTEGRAL BELL TYPE FLEXIBLE ELASTOMERIC JOINTS, MEETING THE REQUIREMENTS OF ASTM D-3212.

    BEDDING AND COVER MATERIAL - BEDDING AND COVER MATERIAL SHALL CONFORM TO THE APPROPRIATE SECTIONS OF THE "STANDARD SPECIFICATION" WITH THE FOLLOWING MODIFICATION: "COVER MATERIAL SHALL BE THE SAME AS USED FOR BEDDING AND SHALL CONFORM TO SECTION 8.43.2 (A). BEDDING AND COVER MATERIAL SHALL BE PLACED IN A MINIMUM OF THREE SEPARATE LIFTS, OR AS REQUIRED TO INSURE ADEQUATE COMPACTING OF THESE MATERIALS, WITH ONE LIFT OF BEDDING MATERIAL ENDING AT OR NEAR THE SPRINGLINE OF THE PIPE. THE CONTRACTOR SHALL TAKE CARE TO COMPLETELY WORK BEDDING MATERIAL UNDER THE HAUNCH OF THE PIPE TO PROVIDE ADEQUATE SIDE SUPPORT."

    BACKFILL - BACKFILL MATERIAL AND INSTALLATION SHALL BE IN ACCORDANCE CHAPTER 2.6.0 OF THE "STANDARD SPECIFICATIONS." GRAVEL BACKFILL IS REQUIRED IN ALL PAVED AREAS AND TO A POINT 5 FEET BEYOND THE EDGE OF PAVEMENT. TRENCHES RUNNING PARALLEL TO AND LESS THAN 5 FEET FROM THE EDGE OF PAVEMENT SHALL ALSO REQUIRE GRAVEL BACKFILL. LANDSCAPED AREAS MAY BE BACKFILLED WITH EXCAVATED MATERIAL IN CONFORMANCE WITH SECTION 8.43.5 OF THE "STANDARD SPECIFICATIONS."

    MANHOLES - MANHOLES SHALL BE CONSTRUCTED IN ACCORDANCE WITH FILE NOS. 12, 13 AND 15 OF THE "STANDARD SPECIFICATIONS" AND ALL SPECIAL PROVISIONS OF THE VILLAGE OF PLEASANT PRAIRIE. STRUCTURE SHOP DRAWINGS SHALL BE SUBMITTED TO PINNACLE ENGINEERING GROUP FOR REVIEW AND APPROVAL PRIOR TO MANUFACTURING AND INSTALLATION.

    MANHOLE FRAMES AND COVERS - MANHOLE FRAMES AND COVERS SHALL BE NEENAH R-1580 WITH TYPE "B" SELF SEALING LIDS, NON-ROCKING OR EQUAL

16. WATER MAIN AND SANITARY SEWER SHALL BE INSULATED WHEREVER THE DEPTH OF COVER IS LESS THAN 6 FEET. INSULATION AND PLACING OF INSULATION SHALL CONFORM TO CHAPTER 4.17.0 "INSULATION" OF THE STANDARD SPECIFICATIONS FOR SEWER AND WATER CONSTRUCTION IN WISCONSIN 6TH EDITION UPDATED WITH ITS LATEST ADDENDUM (TYP.).
17. TRACER WIRE SHALL BE INSTALLED IN ACCORDANCE WITH THE PROVISIONS OF THESE CODE SECTIONS AS PER 182.0715(2R) OF THE STATUTES. THE TRACER WIRE FOR THE SANITARY SEWER LATERAL SHALL BE CONTINUOUS AND SHALL BE EXTENDED ABOVE GRADE VIA A 4-INCH PVC PIPE WITH SCREW-ON CAP ADJACENT TO THE PROPOSED TERMINATION POINT OF THE LATERAL FOR THE PROPOSED BUILDING.
18. SEE UTILITY PLANS AND CONSTRUCTION DETAILS FOR ADDITIONAL INFORMATION.

NOTES

1. SEE CONSTRUCTION DETAILS SECTION FOR ADDITIONAL INFORMATION PERTAINING TO THE UTILITY PLAN.
2. STORM SEWER TO BE PRIVATELY OWNED AND MAINTAINED.
3. SEE SHEET C-9 FOR CROSSING INFORMATION

FIRE PROTECTION NOTES

ALL NEW AND EXISTING FIRE HYDRANTS SHALL BE REPAINTED ACCORDING TO THE VILLAGE OF PLEASANT PRAIRIE FIRE DEPARTMENT COLOR SCHEME.

THIS PLAN SHALL NOT BE USED FOR FIRE PROTECTION SYSTEM AND SYSTEM CONSTRUCTION. FINAL DESIGN AND SIZING SHALL BE BY FIRE PROTECTION ENGINEER.

CONTRACTOR SHALL VERIFY LOCATION AND ELEVATION OF ALL EXISTING UTILITIES PRIOR TO INSTALLATION OF PROPOSED UTILITIES.

No.	DESCRIPTION
10	20' GENERAL UTILITY EASEMENT PER C.S.M. No. 2273
11	25' STORM SEWER, ACCESS AND MAINTENANCE EASEMENT PER C.S.M. No. 2273
12	PROPOSED DEDICATED STORMWATER EASEMENT
13	PROPOSED DEDICATED PUBLIC UTILITY EASEMENT
14	PROPOSED DEDICATED PUBLIC STREET
15	50' x 50' VISION CORNER EASEMENT PER C.S.M. No. 2273
16	FLOODPLAIN AREA BASED ON VILLAGE OF PLEASANT PRAIRIE FLOODPLAIN BOUNDARY ADJUSTMENT; STATE OF WISCONSIN DEPARTMENT OF NATURAL RESOURCES FLOODPLAIN ANALYSIS REVIEW, UN-NAMED TRIBUTARY NO. 1 TO THE DES PLAINS RIVER, VILLAGE OF PLEASANT PRAIRIE, KENOSHA COUNTY; AND FEDERAL EMERGENCY MANAGEMENT AGENCY (FEMA) CONDITIONAL LETTER OF MAP REVISION (CLOMR) CASE NO. 20-05-3166R FOR THE REVISION OF FLOOD INSURANCE RATE MAP COMMUNITY PANEL NO. 55059C0194D WITH AN EFFECTIVE DATE OF JUNE 19, 2012
17	WETLANDS DELINEATED BY LANDCO2 APRIL 2026 TO REMAIN
18	WETLANDS DELINEATED BY LANDCO2 APRIL 2026, TO BE FILLED

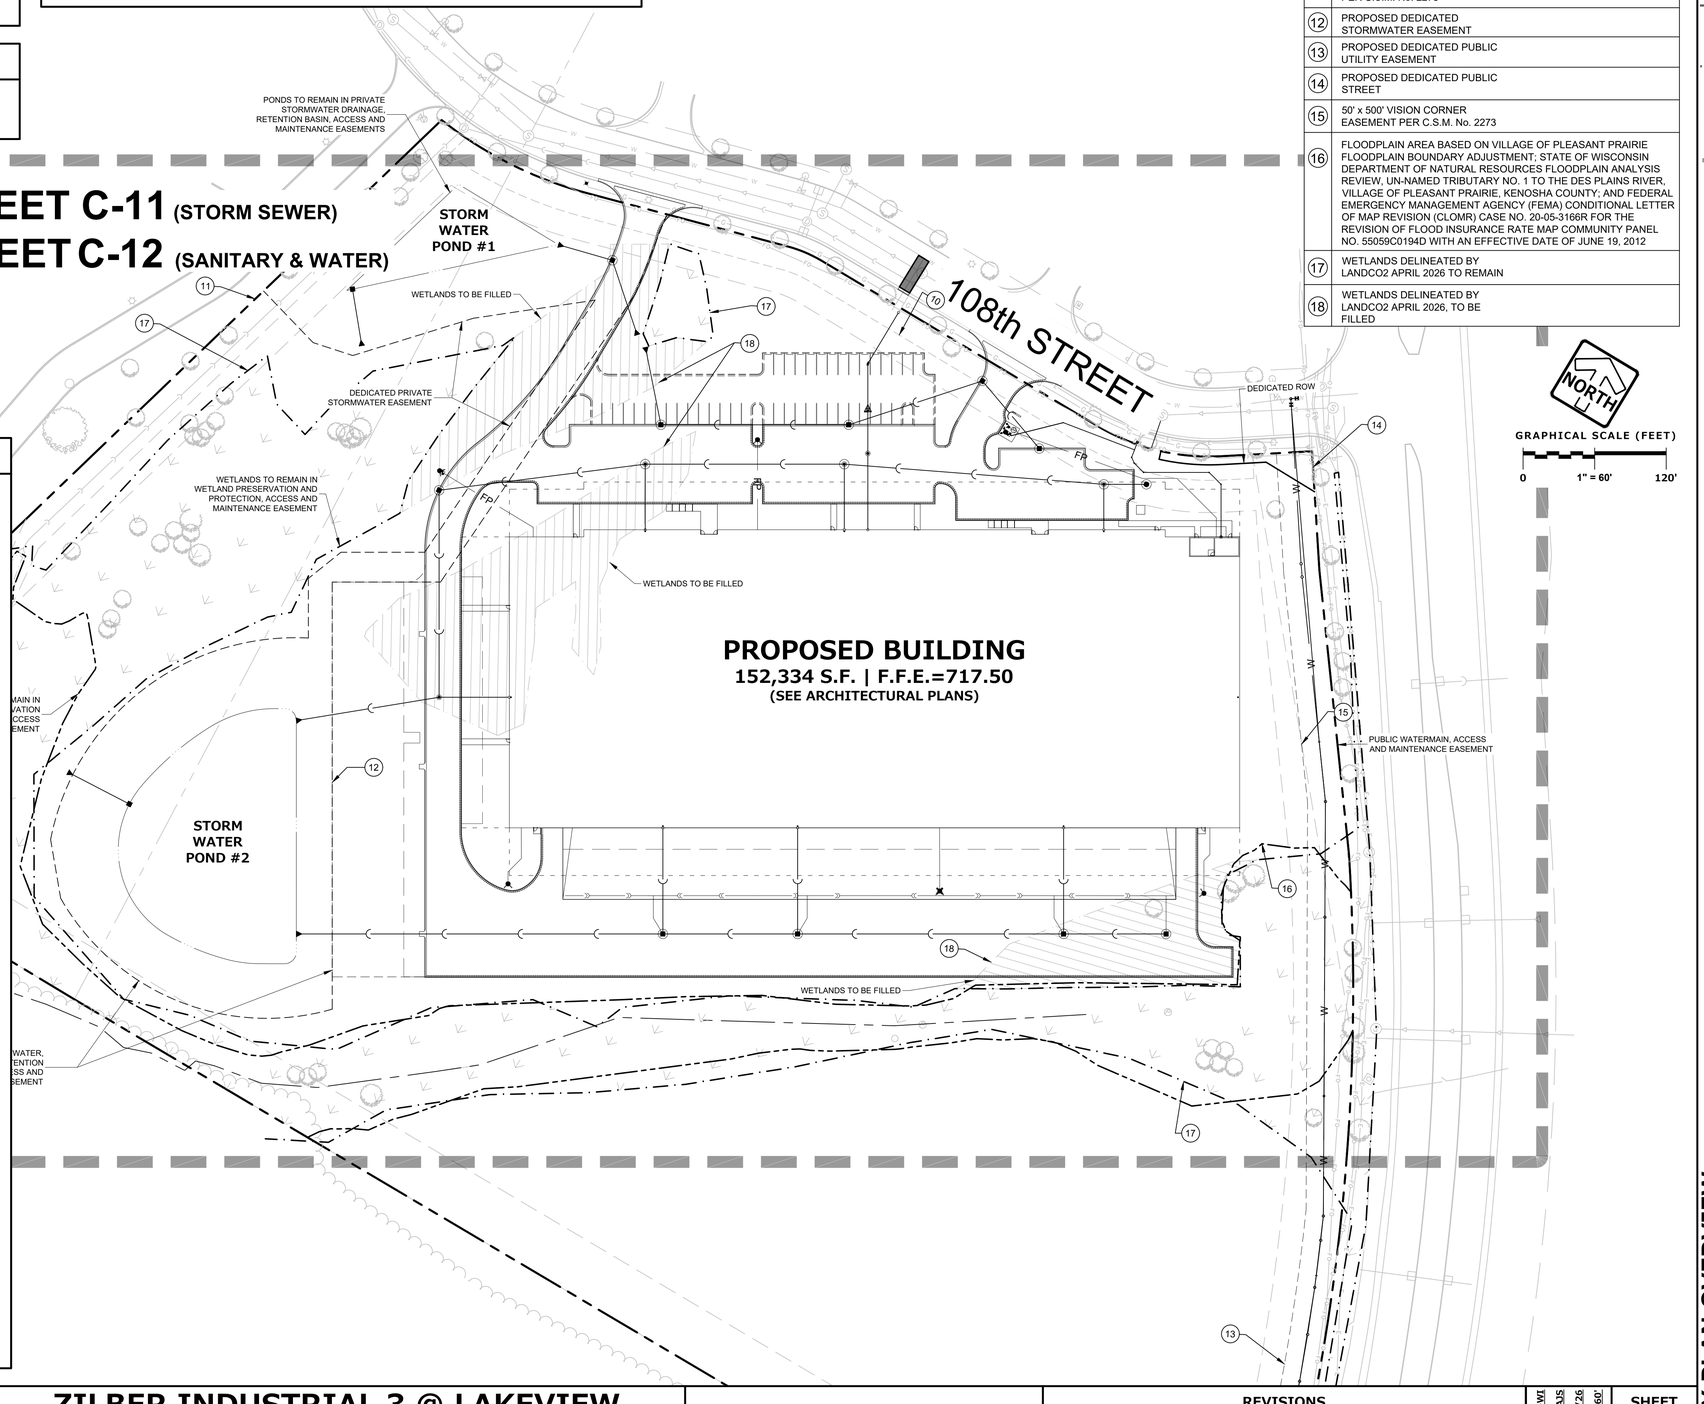

REVIEWED:
DESIGNED: AJS
DRAFTED: AJS

PLAN | DESIGN | DELIVER
www.pinnacle-engr.com

PINNACLE ENGINEERING GROUP
ENGINEERING I NATURAL RESOURCES I SURVEYING

WISCONSIN OFFICE:
20725 WATERTOWN ROAD, SUITE 100
BROOKFIELD, WI 53186
(262) 754-8888
CHICAGO I MILWAUKEE : NATIONWIDE

ZILBER INDUSTRIAL 3 @ LAKEVIEW CORPORATE PARK

108TH STREET & GREEN BAY ROAD (STH "31")
VILLAGE OF PLEASANT PRAIRIE, KENOSHA COUNTY

UTILITY PLAN OVERVIEW

REVISIONS

1	VOPP SITE PLAN SUBMITTAL	03/20/26			
2	VOPP RESUBMITTAL	05/11/26			
3	VOPP RESUBMITTAL	07/17/26			
4	VOPP RESUBMITTAL	10/02/26			

PEG JOB No. 644.00-WI
PEG PM AJS
START DATE 03/20/26
SCALE 1" = 60'

SHEET
C-10
C-22

© COPYRIGHT 2019

UTILITY PLAN OVERVIEW

www.pinnacle-engr.com

Z:\PROJECTS\2016\644.00-WI\CAD\SHEETS\644.00-WI-SHEETS-UTILITY.DWG

CONTRACTOR SHALL VERIFY LOCATION AND ELEVATION OF ALL EXISTING UTILITIES PRIOR TO INSTALLATION OF PROPOSED UTILITIES.

ALL WORK WITHIN PUBLIC R.O.W. SHALL CONFORM TO THE VILLAGE OF PLEASANT PRAIRIE STANDARDS.

PUBLIC WORKS COORDINATION

1. CONTRACTOR SHALL COORDINATE AND SCHEDULE INSPECTIONS FOR WATER CONNECTIONS AND UTILITY ADJUSTMENTS WITH THE PUBLIC WORKS DEPARTMENT. CONNECTION / ADJUSTMENT WORK SHALL NOT COMMENCE UNTIL PUBLIC WORKS HAS BEEN CONTACTED AND INSPECTIONS SCHEDULED.
2. ALL PUBLIC WATER VALVES SHALL BE OPERATED BY OR UNDER THE SUPERVISION OF THE PUBLIC WORKS DEPARTMENT. CONTRACTOR SHALL COORDINATE WITH THE PUBLIC WORKS DEPARTMENT.
3. CONTRACTOR SHALL COORDINATE THEIR WORK AND SCHEDULE INSPECTIONS FOR THE SEWER CONNECTION TO THE PUBLIC SANITARY SEWER WITH THE VILLAGE PUBLIC WORKS DEPARTMENT. CONNECTION WORK SHALL NOT COMMENCE UNTIL PUBLIC WORKS HAS BEEN CONTACTED AND INSPECTIONS SCHEDULED.

EXISTING CONDITIONS SURVEY:

EXISTING CONDITIONS SURVEY PROVIDED BY PINNACLE ENGINEERING GROUP. ALTHOUGH PEG HAS NO REASON TO BELIEVE THE SURVEY IS INACCURATE, PEG MAKES NO WARRANTS THAT EXISTING INFORMATION CONTAINED WITHIN THESE PLANS IS ALL-INCLUSIVE OR ACCURATE. CONTRACTOR SHALL UNDERTAKE NECESSARY EFFORTS TO VERIFY THE EXISTING CONDITIONS PRIOR TO THE START OF MATERIAL PROCUREMENT AND CONSTRUCTION EFFORTS/ACTIVITIES.

FUTURE AREAS ARE SHOWN FOR ILLUSTRATIVE PURPOSES ONLY. ANY FUTURE PARKING LOT EXPANSION AND/OR TRUCK DOORS/DOCKS OR TRAILING PARKING AREAS SHALL MEET CURRENT REQUIREMENTS IN EFFECT AT THE TIME OF THE PROPOSED EXPANSION.

CROSSINGS

1. **18" STORM OVER 8" SANITARY**
   18" B/PIPE = 709.18
   8" T/PIPE = 705.11
2. **12" STORM OVER 8" SANITARY**
   12" B/PIPE = 710.40
   8" T/PIPE = 704.29

LEGEND

- SANITARY SEWER MANHOLE
- STORM SEWER MANHOLE
- STORM SEWER CATCH BASIN (ROUND CASTING)
- STORM SEWER CATCH BASIN (RECTANGULAR CASTING)
- PRECAST CONCRETE FLARED END SECTION
- VALVE BOX
- FIRE HYDRANT
- SANITARY SEWER
- STORM SEWER
- DRAIN TILE (SEE DETAIL)
- DRAIN TILE DONUT (SEE DETAIL)
- WATER MAIN
- FIRE PROTECTION
- UTILITY CROSSING
- PROPOSED ELECTRICAL CABLE (APPROXIMATE LOCATION)
- PROPOSED GAS MAIN (APPROXIMATE LOCATION)
- TELEPHONE LINE
- OVERHEAD WIRES
- LIGHTING
- ELECTRICAL TRANSFORMER OR PEDESTAL
- POWER POLE
- POWER POLE WITH LIGHTS
- STREET SIGN
- REMOVE EXISTING UTILITY

STORM WATER POND #1
N.W.L.=706.00
1-YR PEAK WSE=707.21
2-YR PEAK WSE=707.47
10-YR PEAK WSE=708.32
100-YR PEAK WSE=709.77

STORM WATER POND #2
N.W.L.=705.00
1-YR PEAK WSE=706.63
2-YR PEAK WSE=706.90
10-YR PEAK WSE=707.82
100-YR PEAK WSE=708.70

PROPOSED BUILDING
152,334 S.F. | F.F.E.=717.50
(SEE ARCHITECTURAL PLANS)

108th STREET

STATE TRUNK HIGHWAY "31"

GRAPHICAL SCALE (FEET)
0 1" = 40' 80'

No.	DESCRIPTION
10	20' GENERAL UTILITY EASEMENT PER C.S.M. No. 2273
11	25' STORM SEWER, ACCESS AND MAINTENANCE EASEMENT PER C.S.M. No. 2273
12	PROPOSED DEDICATED STORMWATER EASEMENT
13	PROPOSED DEDICATED PUBLIC UTILITY EASEMENT
14	PROPOSED DEDICATED PUBLIC STREET
15	50' x 500' VISION CORNER EASEMENT PER C.S.M. No. 2273
16	FLOODPLAIN AREA BASED ON VILLAGE OF PLEASANT PRAIRIE FLOODPLAIN BOUNDARY ADJUSTMENT; STATE OF WISCONSIN DEPARTMENT OF NATURAL RESOURCES FLOODPLAIN ANALYSIS REVIEW, UN-NAMED TRIBUTARY NO. 1 TO THE DES PLAINS RIVER, VILLAGE OF PLEASANT PRAIRIE, KENOSHA COUNTY; AND FEDERAL EMERGENCY MANAGEMENT AGENCY (FEMA) CONDITIONAL LETTER OF MAP REVISION (CLOMR) CASE NO. 20-05-3166R FOR THE REVISION OF FLOOD INSURANCE RATE MAP COMMUNITY PANEL NO. 55059C0194D WITH AN EFFECTIVE DATE OF JUNE 19, 2012
17	WETLANDS DELINEATED BY LANDCO2 APRIL 2026 TO REMAIN
18	WETLANDS DELINEATED BY LANDCO2 APRIL 2026, TO BE FILLED

THESE PLANS AND DESIGNS ARE COPYRIGHT PROTECTED AND MAY NOT BE USED IN WHOLE OR IN PART WITHOUT THE WRITTEN CONSENT OF PINNACLE ENGINEERING GROUP, LLC

© COPYRIGHT 2019

www.pinnacle-engr.com

REVIEWED:
DESIGNED: AJS
DRAFTED: AJS

PLAN | DESIGN | DELIVER
www.pinnacle-engr.com

PINNACLE ENGINEERING GROUP
ENGINEERING | NATURAL RESOURCES | SURVEYING
WISCONSIN OFFICE:
20725 WATERTOWN ROAD, SUITE 100
BROOKFIELD, WI 53186
(262) 754-8888
CHICAGO | MILWAUKEE : NATIONWIDE

ZILBER INDUSTRIAL 3 @ LAKEVIEW CORPORATE PARK
108TH STREET & GREEN BAY ROAD (STH "31")
VILLAGE OF PLEASANT PRAIRIE, KENOSHA COUNTY

UTILITY PLAN (STORM SEWER)

REVISIONS

1	VOPP SITE PLAN SUBMITTAL	03/20/26	
2	VOPP RESUBMITTAL	05/11/26	
3	VOPP RESUBMITTAL	07/17/26	
4	VOPP RESUBMITTAL	10/02/26	

PEG JOB No. 644.00-WI
PEG PM AJS
START DATE 03/20/26
SCALE

SHEET
C-11
C-22

UTILITY PLAN (STORM SEWER)

Z:\PROJECTS\2016\644.00-WI\CAD\SHEETS\644.00-WI-SHEETS-UTILITY.DWG

THESE PLANS AND DESIGNS ARE COPYRIGHT PROTECTED AND MAY NOT BE USED IN WHOLE OR IN PART WITHOUT THE WRITTEN CONSENT OF PINNACLE ENGINEERING GROUP, LLC

www.pinnacle-engr.com

CONTRACTOR SHALL VERIFY LOCATION AND ELEVATION OF ALL EXISTING UTILITIES PRIOR TO INSTALLATION OF PROPOSED UTILITIES.

ALL WORK WITHIN PUBLIC R.O.W. SHALL CONFORM TO THE VILLAGE OF PLEASANT PRAIRIE STANDARDS.

PUBLIC WORKS COORDINATION

1. CONTRACTOR SHALL COORDINATE AND SCHEDULE INSPECTIONS FOR WATER CONNECTIONS AND UTILITY ADJUSTMENTS WITH THE PUBLIC WORKS DEPARTMENT. CONNECTION / ADJUSTMENT WORK SHALL NOT COMMENCE UNTIL PUBLIC WORKS HAS BEEN CONTACTED AND INSPECTIONS SCHEDULED.
2. ALL PUBLIC WATER VALVES SHALL BE OPERATED BY OR UNDER THE SUPERVISION OF THE PUBLIC WORKS DEPARTMENT. CONTRACTOR SHALL COORDINATE WITH THE PUBLIC WORKS DEPARTMENT.
3. CONTRACTOR SHALL COORDINATE THEIR WORK AND SCHEDULE INSPECTIONS FOR THE SEWER CONNECTION TO THE PUBLIC SANITARY SEWER WITH THE VILLAGE PUBLIC WORKS DEPARTMENT. CONNECTION WORK SHALL NOT COMMENCE UNTIL PUBLIC WORKS HAS BEEN CONTACTED AND INSPECTIONS SCHEDULED.

EXISTING CONDITIONS SURVEY:

EXISTING CONDITIONS SURVEY PROVIDED BY PINNACLE ENGINEERING GROUP. ALTHOUGH PEG HAS NO REASON TO BELIEVE THE SURVEY IS INACCURATE, PEG MAKES NO WARRANTS THAT EXISTING INFORMATION CONTAINED WITHIN THESE PLANS IS ALL-INCLUSIVE OR ACCURATE. CONTRACTOR SHALL UNDERTAKE NECESSARY EFFORTS TO VERIFY THE EXISTING CONDITIONS PRIOR TO THE START OF MATERIAL PROCUREMENT AND CONSTRUCTION EFFORTS/ACTIVITIES.

NOTES

1. SEE CONSTRUCTION DETAILS SECTION FOR ADDITIONAL INFORMATION PERTAINING TO THE UTILITY PLAN.
2. STORM SEWER TO BE PRIVATELY OWNED AND MAINTAINED.
3. SEE SHEET C-9 FOR CROSSING INFORMATION

FIRE PROTECTION NOTES

ALL NEW AND EXISTING FIRE HYDRANTS SHALL BE REPAINTED ACCORDING TO THE VILLAGE OF PLEASANT PRAIRIE FIRE DEPARTMENT COLOR SCHEME.

FUTURE AREAS ARE SHOWN FOR ILLUSTRATIVE PURPOSES ONLY. ANY FUTURE PARKING LOT EXPANSION AND/OR TRUCK DOORS/DOCKS OR TRAILING PARKING AREAS SHALL MEET CURRENT REQUIREMENTS IN EFFECT AT THE TIME OF THE PROPOSED EXPANSION.

LEGEND

- SANITARY SEWER MANHOLE
- STORM SEWER MANHOLE
- STORM SEWER CATCH BASIN (ROUND CASTING)
- STORM SEWER CATCH BASIN (RECTANGULAR CASTING)
- PRECAST CONCRETE FLARED END SECTION
- VALVE BOX
- FIRE HYDRANT
- SANITARY SEWER
- STORM SEWER
- DRAIN TILE (SEE DETAIL)
- DRAIN TILE DONUT (SEE DETAIL)
- WATER MAIN
- FIRE PROTECTION
- UTILITY CROSSING
- PROPOSED ELECTRICAL CABLE (APPROXIMATE LOCATION)
- PROPOSED GAS MAIN (APPROXIMATE LOCATION)
- TELEPHONE LINE
- OVERHEAD WIRES
- LIGHTING
- ELECTRICAL TRANSFORMER OR PEDESTAL
- POWER POLE
- POWER POLE WITH LIGHTS
- STREET SIGN
- REMOVE EXISTING UTILITY

STORM WATER POND #1
N.W.L.=706.00
1-YR PEAK WSE=707.21
2-YR PEAK WSE=707.47
10-YR PEAK WSE=708.32
100-YR PEAK WSE=709.77

STORM WATER POND #2
N.W.L.=705.00
1-YR PEAK WSE=706.63
2-YR PEAK WSE=706.90
10-YR PEAK WSE=707.82
100-YR PEAK WSE=708.70

25' STORM SEWER, ACCESS AND MAINTENANCE EASEMENT PER C.S.M. NO. 2273

WETLANDS TO BE FILLED

BUILDING SETBACK LINE PER DOC. 1204261

20' GENERAL UTILITY EASEMENT PER C.S.M. NO. 2273

108th STREET

SAN CONNECT 100
INV=700.87 (8")

22.5°+11.25° HORIZ. BEND 101
48" DIA
RIM= 705.44
INV=701.91 (8" SE)
INV=701.91 (8" N)

50.1 L.F. 8" PVC Pipe @ S=2.08%

75.2 L.F. 8" PVC Pipe @ S=2.08%

FH ASSEMBLY B
SERVICE TO HYDRANT TO BE DETERMINED BY FIRE PROTECTION ENGINEER

SAMPLING MH (102)
48" DIA
RIM=707.00
INV=703.48 (8" SE)
INV=703.48 (8" NW)

DEDICATED PRIVATE STORMWATER EASEMENT

FH ASSEMBLY B
SERVICE TO HYDRANT TO BE DETERMINED BY FIRE PROTECTION ENGINEER

64.0 L.F. 8" PVC Pipe @ S=2.08%

BC SANITARY 103
INV=704.81 (8")

FH ASSEMBLY A
SERVICE TO HYDRANT TO BE DETERMINED BY FIRE PROTECTION ENGINEER

DEDICATED ROW

STATE TRUNK HIGHWAY "31"

NO ACCESS PER C.S.M. NO. 2273

SEE SHEETS C-11 AND C-12 FOR PUBLIC WATERMAIN PLAN AND PROFILE

30' WATERMAIN ACCESS AND MAINTENANCE EASEMENT

WETLANDS DELINEATED BY WETLAND & WATERWAY CONSULTING, LLC.

FH ASSEMBLY D
SERVICE TO HYDRANT TO BE DETERMINED BY FIRE PROTECTION ENGINEER

FH ASSEMBLY E
SERVICE TO HYDRANT TO BE DETERMINED BY FIRE PROTECTION ENGINEER

FH ASSEMBLY F
SERVICE TO HYDRANT TO BE DETERMINED BY FIRE PROTECTION ENGINEER

DEDICATED STORMWATER, DRAINAGE, RETENTION BASIN ACCESS AND MAINTENANCE EASEMENT

WETLANDS TO BE FILLED

PROPOSED WETLAND IMPACTS 48,384 S.F. (1.11 AC.)

FLOODPLAIN POST-PROJECT

WETLAND BOUNDARY POST-PROJECT

100 YEAR FLOODPLAIN PER FEMA

BUILDING SETBACK LINE PER DOC. 1204261

PROPOSED BUILDING
152,334 S.F. | F.F.E.=717.50
(SEE ARCHITECTURAL PLANS)

THIS PLAN SHALL NOT BE USED FOR FIRE PROTECTION SYSTEM AND SYSTEM CONSTRUCTION. FINAL DESIGN AND SIZING SHALL BE BY FIRE PROTECTION ENGINEER.

GRAPHICAL SCALE (FEET)
0 1" = 40' 80'

No.	DESCRIPTION
10	20' GENERAL UTILITY EASEMENT PER C.S.M. No. 2273
11	25' STORM SEWER, ACCESS AND MAINTENANCE EASEMENT PER C.S.M. No. 2273
12	PROPOSED DEDICATED STORMWATER EASEMENT
13	PROPOSED DEDICATED PUBLIC UTILITY EASEMENT
14	PROPOSED DEDICATED PUBLIC STREET
15	50' x 500' VISION CORNER EASEMENT PER C.S.M. No. 2273
16	FLOODPLAIN AREA BASED ON VILLAGE OF PLEASANT PRAIRIE FLOODPLAIN BOUNDARY ADJUSTMENT; STATE OF WISCONSIN DEPARTMENT OF NATURAL RESOURCES FLOODPLAIN ANALYSIS REVIEW, UN-NAMED TRIBUTARY NO. 1 TO THE DES PLAINS RIVER, VILLAGE OF PLEASANT PRAIRIE, KENOSHA COUNTY; AND FEDERAL EMERGENCY MANAGEMENT AGENCY (FEMA) CONDITIONAL LETTER OF MAP REVISION (CLOMR) CASE NO. 20-05-3166R FOR THE REVISION OF FLOOD INSURANCE RATE MAP COMMUNITY PANEL NO. 55059C0194D WITH AN EFFECTIVE DATE OF JUNE 19, 2012
17	WETLANDS DELINEATED BY LANDCO2 APRIL 2026 TO REMAIN
18	WETLANDS DELINEATED BY LANDCO2 APRIL 2026, TO BE FILLED

REVIEWED:
DESIGNED: AJS
DRAFTED: AJS

PLAN | DESIGN | DELIVER
www.pinnacle-engr.com

PINNACLE ENGINEERING GROUP
ENGINEERING | NATURAL RESOURCES | SURVEYING

WISCONSIN OFFICE:
20725 WATERTOWN ROAD, SUITE 100
BROOKFIELD, WI 53186
(262) 754-8888
CHICAGO | MILWAUKEE : NATIONWIDE

ZILBER INDUSTRIAL 3 @ LAKEVIEW CORPORATE PARK
108TH STREET & GREEN BAY ROAD (STH "31")
VILLAGE OF PLEASANT PRAIRIE, KENOSHA COUNTY

UTILITY PLAN (SANITARY SEWER & WATERMAIN)

REVISIONS

1	VOPP SITE PLAN SUBMITTAL	03/20/26			
2	VOPP RESUBMITTAL	05/11/26			
3	VOPP RESUBMITTAL	07/17/26			
4	VOPP RESUBMITTAL	10/02/26			

PEG JOB No. 644.00-WI
PEG PM AJS
START DATE 03/20/26
SCALE

SHEET
C-12
C-22

© COPYRIGHT 2019

UTILITY PLAN (SANITARY SEWER & WATERMAIN)

Z:\PROJECTS\2016\644.00-WI\CAD\SHEETS\644.00-WI-SHEETS-UTILITY.DWG

THESE PLANS AND DESIGNS ARE COPYRIGHT PROTECTED AND MAY NOT BE USED IN WHOLE OR IN PART WITHOUT THE WRITTEN CONSENT OF PINNACLE ENGINEERING GROUP, LLC

GENERAL EROSION AND SEDIMENT CONTROL NOTES

1. ALL CONSTRUCTION SHALL ADHERE TO THE REQUIREMENTS SET FORTH IN EPA'S NATIONAL POLLUTANT DISCHARGE ELIMINATION SYSTEM (NPDES) STORMWATER GENERAL PERMIT ("WPDES" PERMIT NO. WI-S067831-4) FOR CONSTRUCTION SITE LAND DISTURBANCE ACTIVITIES. ALL EROSION AND SEDIMENT CONTROL MEASURES ARE TO BE CONSTRUCTED AND MAINTAINED IN ACCORDANCE WITH LOCAL, STATE AND FEDERAL TECHNICAL STANDARDS AND PROVISIONS IN EFFECT AT THE TIME OF CONSTRUCTION. THESE PROCEDURES AND STANDARDS SHALL BE REFERRED TO AS BEST MANAGEMENT PRACTICES (BMP'S). IT IS THE RESPONSIBILITY OF ALL CONTRACTORS ASSOCIATED WITH THE PROJECT TO OBTAIN A COPY OF, AND UNDERSTAND, THE BMP'S PRIOR TO THE START OF CONSTRUCTION ACTIVITIES.
2. THE EROSION CONTROL MEASURES INDICATED ON THE PLANS ARE THE MINIMUM REQUIREMENTS. ADDITIONAL CONTROL MEASURES AS DIRECTED BY OWNER/ENGINEER OR GOVERNING AGENCIES SHALL BE INSTALLED WITHIN 24 HOURS OF REQUEST.
3. MODIFICATIONS TO THE APPROVED SWPPP IN ORDER TO MEET UNFORESEEN FIELD CONDITIONS ARE ALLOWED IF MODIFICATIONS CONFORM TO BMP'S. ALL MODIFICATIONS MUST BE APPROVED BY OWNER/ENGINEER/GOVERNING AGENCY PRIOR TO DEVIATION OF THE APPROVED PLAN.
4. INSTALL PERIMETER EROSION CONTROL MEASURES (SUCH AS CONSTRUCTION ENTRANCES, SILT FENCE AND EXISTING INLET PROTECTION) PRIOR TO ANY SITE WORK, INCLUDING GRADING OR DISTURBANCE OF EXISTING SURFACE COVER, AS SHOWN ON PLAN IN ORDER TO PROTECT ADJACENT PROPERTIES/STORM SEWER SYSTEMS FROM SEDIMENT TRANSPORT.
5. CONSTRUCTION ENTRANCES SHALL BE INSTALLED AT ALL LOCATIONS OF VEHICLE INGRESS/EGRESS POINTS. CONTRACTOR IS RESPONSIBLE TO COORDINATE LOCATION(S) WITH THE PROPER AUTHORITIES, PROVIDE NECESSARY FEES AND OBTAIN ALL REQUIRED APPROVALS OR PERMITS. ADDITIONAL CONSTRUCTION ENTRANCES OTHER THAN AS SHOWN ON THE PLANS MUST BE APPROVED BY THE APPLICABLE GOVERNING AGENCIES PRIOR TO INSTALLATION.
6. PAVED SURFACES ADJACENT TO CONSTRUCTION ENTRANCES SHALL BE SWEPT AND/OR SCRAPED TO REMOVE ACCUMULATED SOIL, DIRT AND/OR DUST IMMEDIATELY AND AS REQUESTED BY THE GOVERNING AGENCIES.
7. ALL EXISTING STORM SEWER FACILITIES THAT WILL COLLECT RUNOFF FROM DISTURBED AREAS SHALL BE PROTECTED TO PREVENT SEDIMENT DEPOSITION WITHIN STORM SEWER SYSTEMS. INLET PROTECTION SHALL BE IMMEDIATELY FITTED AT THE INLET OF ALL INSTALLED STORM SEWER AND SILT FENCE SHALL BE IMMEDIATELY FITTED AT ALL INSTALLED CULVERT INLETS. ALL INLETS, STRUCTURES, PIPES, AND SWALES SHALL BE KEPT CLEAN AND FREE OF SEDIMENTATION AND DEBRIS.
8. EROSION CONTROL FOR UTILITY CONSTRUCTION (STORM SEWER, WATER MAIN, ETC.) OUTSIDE OF THE PERIMETER CONTROLS SHALL INCORPORATE THE FOLLOWING:

   PLACE EXCAVATED TRENCH MATERIAL ON THE HIGH SIDE OF THE TRENCH.

   BACKFILL, COMPACT AND STABILIZE THE TRENCH IMMEDIATELY AFTER PIPE CONSTRUCTION.

   DISCHARGE TRENCH WATER INTO A SEDIMENTATION BASIN OR FILTERING TANK IN ACCORDANCE WITH BMP'S PRIOR TO RELEASE INTO STORM SEWER OR DITCHES.
9. AT A MINIMUM, SEDIMENT BASINS AND NECESSARY TEMPORARY DRAINAGE PROVISIONS SHALL BE CONSTRUCTED AND OPERATIONAL BEFORE BEGINNING OF SIGNIFICANT MASS GRADING OPERATIONS TO PREVENT OFFSITE DISCHARGE OF UNTREATED RUNOFF.
10. ALL WATERCOURSES AND WETLANDS SHALL BE PROTECTED WITH SILT FENCE TO PREVENT ANY DIRECT DISCHARGE FROM DISTURBED SOILS.
11. ALL TEMPORARY AND PERMANENT EROSION CONTROL MEASURES MUST BE MAINTAINED AND REPAIRED AS NEEDED. THE GENERAL CONTRACTOR WILL BE RESPONSIBLE FOR INSPECTION AND REPAIR DURING CONSTRUCTION. THE OWNER WILL BE RESPONSIBLE IF EROSION CONTROL IS REQUIRED AFTER THE CONTRACTOR HAS COMPLETED THE PROJECT.
12. TOPSOIL STOCKPILES SHALL HAVE A BERM OR TRENCH AROUND THE CIRCUMFERENCE AND PERIMETER SILT FENCE TO CONTROL SILT. IF TOPSOIL STOCKPILE REMAINS UNDISTURBED FOR MORE THAN SEVEN (7) DAYS, TEMPORARY SEEDING AND STABILIZATION IS REQUIRED.
13. EROSION CONTROL MEASURES TEMPORARILY REMOVED FOR UNAVOIDABLE CONSTRUCTION ACTIVITIES SHALL BE IN WORKING ORDER IMMEDIATELY FOLLOWING COMPLETION OF SUCH ACTIVITIES OR PRIOR TO THE COMPLETION OF EACH WORK DAY, WHICH EVER OCCURS FIRST.
14. MAINTAIN SOIL EROSION CONTROL DEVICES THROUGH THE DURATION OF THIS PROJECT. ALL TEMPORARY EROSION AND SEDIMENT CONTROL MEASURES SHALL BE REMOVED WITHIN THIRTY (30) DAYS AFTER FINAL SITE STABILIZATION IS ACHIEVED OR AFTER THE TEMPORARY MEASURES ARE NO LONGER NEEDED. DISTURBANCES ASSOCIATED WITH EROSION CONTROL REMOVAL SHALL BE IMMEDIATELY STABILIZED.
15. PUMPS MAY BE USED AS BYPASS DEVICES. IN NO CASE SHALL PUMPED WATER BE DIVERTED OUTSIDE THE PROJECT LIMITS. PUMP DISCHARGE SHALL BE DIRECTED INTO AN APPROVED FILTER BAG OR APPROVED SETTLING DEVICE.
16. GRADING EFFORTS SHALL BE CONDUCTED IN SUCH A MANNER AS TO MINIMIZE EROSION. EROSION AND SEDIMENT CONTROL MEASURES SHALL CONSIDER THE TIME OF YEAR, SITE CONDITIONS, AND THE USE OF TEMPORARY OR PERMANENT MEASURES. ALL DISTURBED AREAS THAT WILL NOT BE WORKED FOR A PERIOD OF FOURTEEN (14) DAYS REQUIRE TEMPORARY SEEDING FOR EROSION CONTROL. SEEDING FOR EROSION CONTROL SHALL BE IN ACCORDANCE WITH TECHNICAL STANDARDS.
17. ALL DISTURBED SLOPES EXCEEDING 4:1, SHALL BE STABILIZED WITH NORTH AMERICAN GREEN S75BN EROSION MATTING (OR APPROVED EQUAL) AND ALL CHANNELS SHALL BE STABILIZED WITH NORTH AMERICAN GREEN C125BN (OR APPROVED EQUAL) OR APPLICATION OF AN APPROVED POLYMER SOIL STABILIZATION TREATMENT OR A COMBINATION THEREOF, AS REQUIRED. EROSION MATTING AND/OR NETTING USED ONSITE SHALL BE INSTALLED IN ACCORDANCE WITH MANUFACTURER'S GUIDELINES.
18. DURING PERIODS OF EXTENDED DRY WEATHER, THE CONTRACTOR SHALL KEEP A WATER TRUCK ON SITE FOR THE PURPOSE OF WATERING DOWN SOILS WHICH MAY OTHERWISE BECOME AIRBORNE. THE CONTRACTOR IS RESPONSIBLE FOR CONTROLLING WIND EROSION (DUST) DURING CONSTRUCTION AT HIS/HER EXPENSE.
19. DISTURBED AREAS AND AREAS USED FOR STORAGE OF MATERIALS THAT ARE EXPOSED TO PRECIPITATION SHALL BE VISUALLY INSPECTED FOR EVIDENCE OF, OR THE POTENTIAL FOR, POLLUTANTS ENTERING THE DRAINAGE SYSTEM ON A DAILY BASIS.
20. QUALIFIED PERSONNEL (PROVIDED BY THE GENERAL/PRIME CONTRACTOR) SHALL INSPECT DISTURBED AREAS OF THE CONSTRUCTION SITE THAT HAVE NOT BEEN FINALLY STABILIZED AND EROSION AND SEDIMENT CONTROLS WITHIN 24 HOURS OF ALL 0.5-INCH, OR MORE, PRECIPITATION EVENTS WITH A MINIMUM INSPECTION INTERVAL OF ONCE EVERY SEVEN (7) CALENDAR DAYS IN THE ABSENCE OF A QUALIFYING RAIN OR SNOWFALL EVENT. REPORTING SHALL BE IN ACCORDANCE WITH OF THE GENERAL PERMIT. CONTRACTOR SHALL IMMEDIATELY ARRANGE TO HAVE ANY DEFICIENT ITEMS REVEALED DURING INSPECTIONS REPAIRED/REPLACED.
21. SEE ADDITIONAL DETAILS AND NOTES ON EROSION CONTROL AND CONSTRUCTION DETAILS.

CONSTRUCTION SITE SEQUENCING

1. INSTALL PERIMETER SILT FENCE, INLET PROTECTION AND TEMPORARY CONSTRUCTION ENTRANCE.
2. STRIP AND STOCKPILE TOPSOIL, INSTALL SILT FENCE AROUND PERIMETER OF STOCKPILE.
3. CONDUCT ROUGH GRADING EFFORTS AND CONSTRUCT SEDIMENT BASIN.
4. INSTALL UTILITY PIPING AND STRUCTURES, IMMEDIATELY INSTALL INLET PROTECTION.
5. COMPLETE FINAL GRADING, INSTALLATION OF GRAVEL BASE COURSES, PLACEMENT OF CURBS, PAVEMENTS, WALKS, ETC.
6. PLACE TOPSOIL AND IMMEDIATELY STABILIZE DISTURBED AREAS WITH EROSION CONTROLS.
7. EROSION CONTROL MEASURES SHALL BE REMOVED ONLY AFTER SITE CONSTRUCTION IS COMPLETE WITH ALL SOIL SURFACES HAVING AN ESTABLISHED VEGETATIVE COVER.

   CONTRACTOR MAY MODIFY SEQUENCING AFTER ITEM 1, AS NEEDED, TO COMPLETE CONSTRUCTION IF EROSION CONTROLS ARE MAINTAINED IN ACCORDANCE WITH THE CONSTRUCTION SITE EROSION CONTROL REQUIREMENTS.

ALL WORK WITHIN PUBLIC R.O.W. AND PUBLIC EASEMENTS SHALL CONFORM TO THE VILLAGE OF PLEASANT PRAIRIE CHAPTER 405 CONSTRUCTION SPECIFICATIONS.

EXISTING CONDITIONS SURVEY:

EXISTING CONDITIONS SURVEY PROVIDED BY PINNACLE ENGINEERING GROUP. ALTHOUGH PEG HAS NO REASON TO BELIEVE THE SURVEY IS INACCURATE, PEG MAKES NO WARRANTS THAT EXISTING INFORMATION CONTAINED WITHIN THESE PLANS IS ALL-INCLUSIVE OR ACCURATE. CONTRACTOR SHALL UNDERTAKE NECESSARY EFFORTS TO VERIFY THE EXISTING CONDITIONS PRIOR TO THE START OF MATERIAL PROCUREMENT AND CONSTRUCTION EFFORTS/ACTIVITIES.

FUTURE AREAS ARE SHOWN FOR ILLUSTRATIVE PURPOSES ONLY. ANY FUTURE PARKING LOT EXPANSION AND/OR TRUCK DOORS/DOCKS OR TRAILING PARKING AREAS SHALL MEET CURRENT REQUIREMENTS IN EFFECT AT THE TIME OF THE PROPOSED EXPANSION.

SHEET C-14

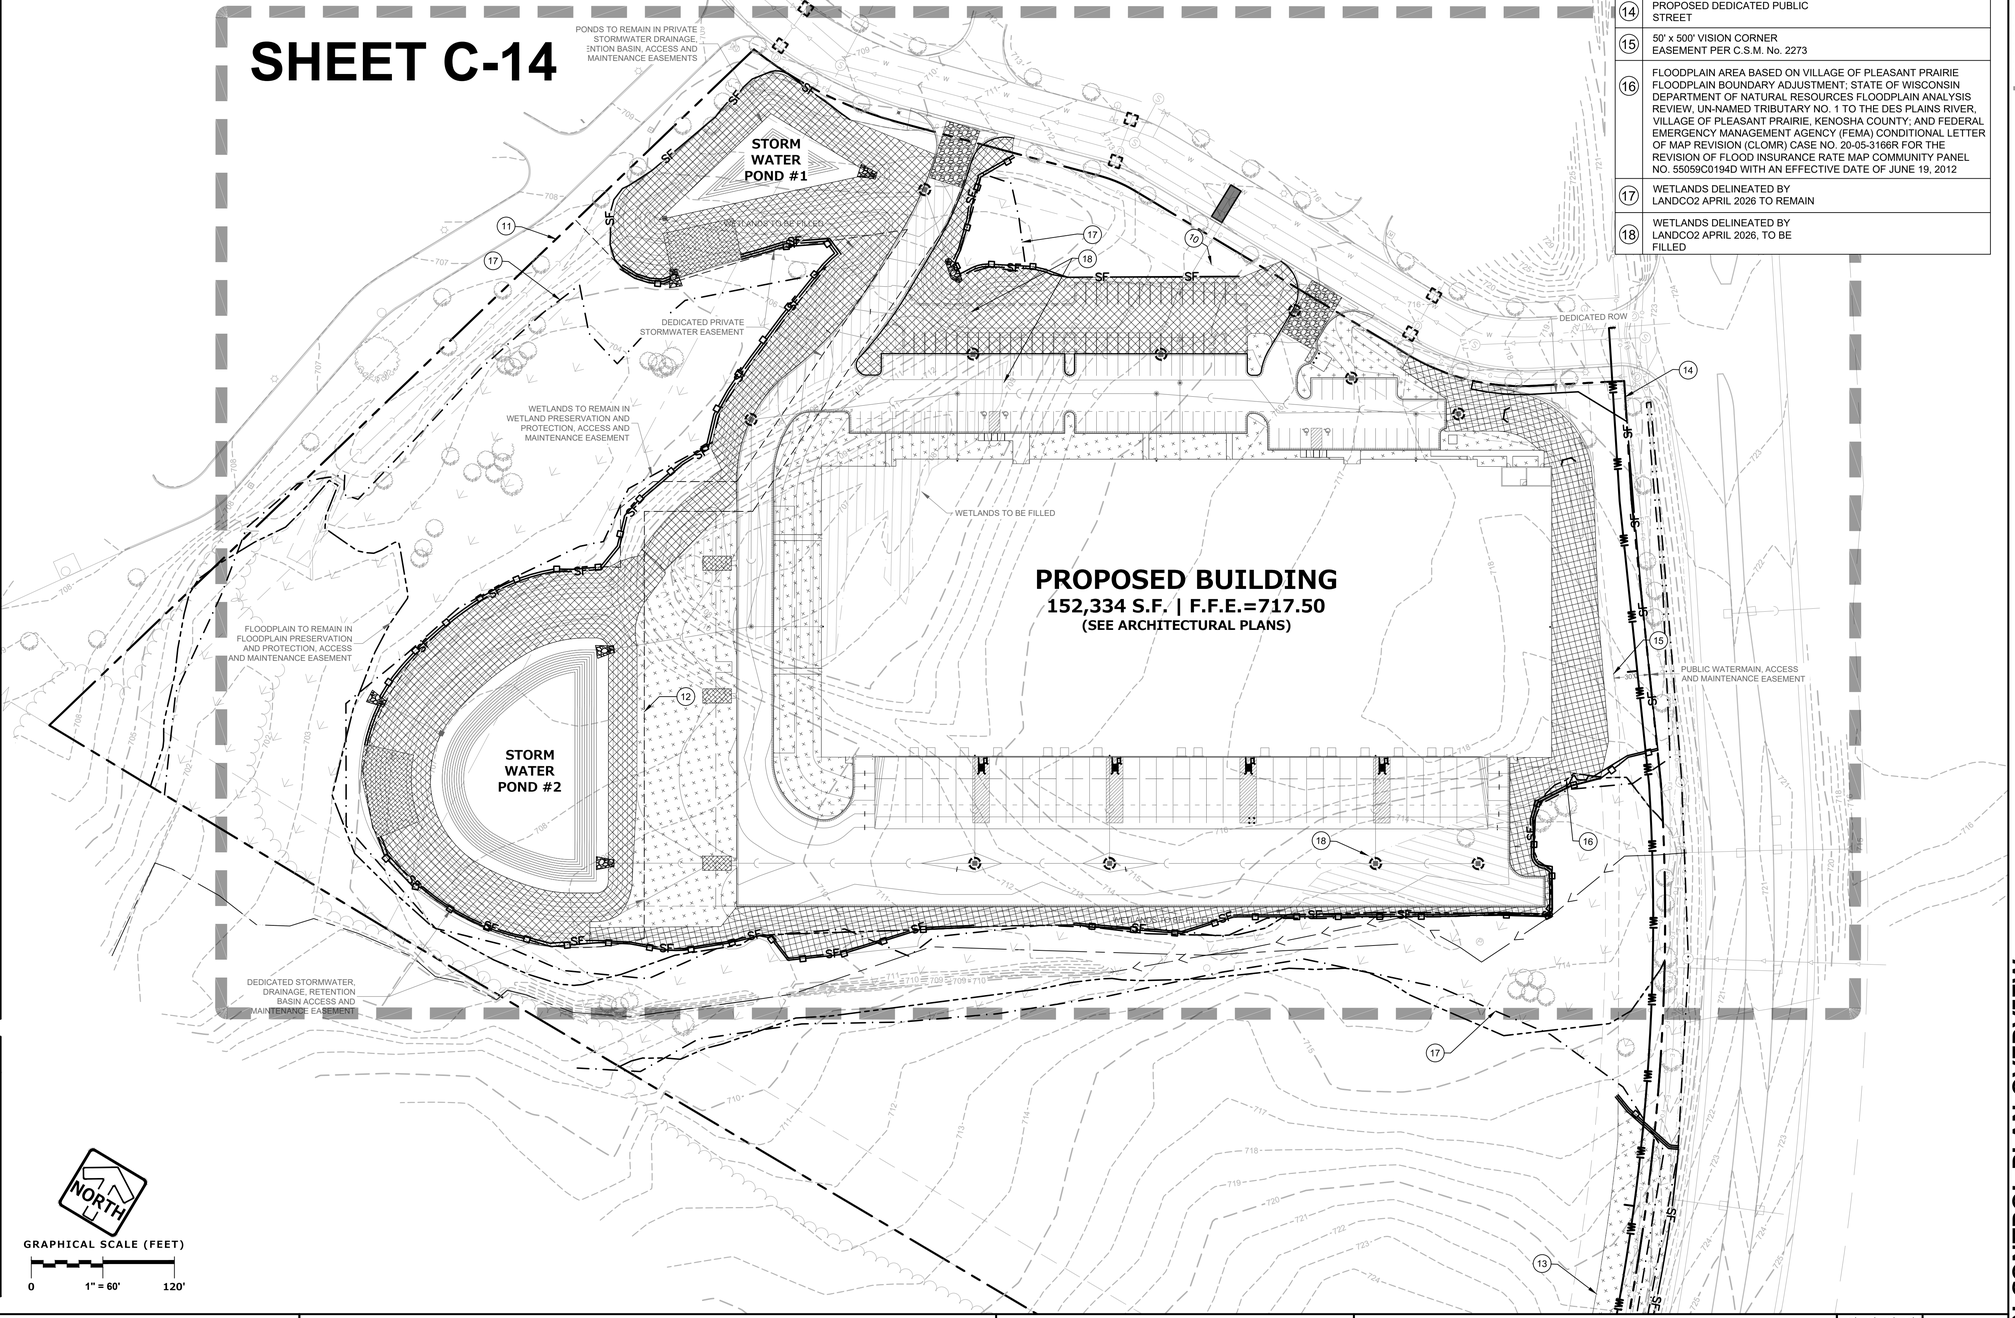

NORTH

GRAPHICAL SCALE (FEET)

0 1" = 60' 120'

No.	DESCRIPTION
10	20' GENERAL UTILITY EASEMENT PER C.S.M. No. 2273
11	25' STORM SEWER, ACCESS AND MAINTENANCE EASEMENT PER C.S.M. No. 2273
12	PROPOSED DEDICATED STORMWATER EASEMENT
13	PROPOSED DEDICATED PUBLIC UTILITY EASEMENT
14	PROPOSED DEDICATED PUBLIC STREET
15	50' x 500' VISION CORNER EASEMENT PER C.S.M. No. 2273
16	FLOODPLAIN AREA BASED ON VILLAGE OF PLEASANT PRAIRIE FLOODPLAIN BOUNDARY ADJUSTMENT; STATE OF WISCONSIN DEPARTMENT OF NATURAL RESOURCES FLOODPLAIN ANALYSIS REVIEW, UN-NAMED TRIBUTARY NO. 1 TO THE DES PLAINS RIVER, VILLAGE OF PLEASANT PRAIRIE, KENOSHA COUNTY; AND FEDERAL EMERGENCY MANAGEMENT AGENCY (FEMA) CONDITIONAL LETTER OF MAP REVISION (CLOMR) CASE NO. 20-05-3166R FOR THE REVISION OF FLOOD INSURANCE RATE MAP COMMUNITY PANEL NO. 55059C0194D WITH AN EFFECTIVE DATE OF JUNE 19, 2012
17	WETLANDS DELINEATED BY LANDCO2 APRIL 2026 TO REMAIN
18	WETLANDS DELINEATED BY LANDCO2 APRIL 2026, TO BE FILLED

www.pinnacle-engr.com

REVIEWED:
DESIGNED: AJS
DRAFTED: AJS

PLAN | DESIGN | DELIVER
www.pinnacle-engr.com

PINNACLE ENGINEERING GROUP
ENGINEERING | NATURAL RESOURCES | SURVEYING

WISCONSIN OFFICE:
20725 WATERTOWN ROAD, SUITE 100
BROOKFIELD, WI 53186
(262) 754-8888
CHICAGO | MILWAUKEE | NATIONWIDE

ZILBER INDUSTRIAL 3 @ LAKEVIEW CORPORATE PARK

108TH STREET & GREEN BAY ROAD (STH "31")
VILLAGE OF PLEASANT PRAIRIE, KENOSHA COUNTY

EROSION CONTROL PLAN OVERVIEW

REVISIONS

1	VOPP SITE PLAN SUBMITTAL	03/20/26		
2	VOPP RESUBMITTAL	05/11/26		
3	VOPP RESUBMITTAL	07/17/26		
4	VOPP RESUBMITTAL	10/02/26		

PEG JOB No. 644.00-WI
PEG PM AJS
START DATE 03/20/26
SCALE 1" = 60'

SHEET
C-13
C-22

©COPYRIGHT 2019

EROSION CONTROL PLAN OVERVIEW

Z:\PROJECTS\2016\644.00-WI\CAD\SHEETS\644.00-WI-SHEETS-EROSION CONTROL.DWG

THESE PLANS AND DESIGNS ARE COPYRIGHT PROTECTED AND MAY NOT BE USED IN WHOLE OR IN PART WITHOUT THE WRITTEN CONSENT OF PINNACLE ENGINEERING GROUP, LLC

LEGEND

- STORM SEWER MANHOLE
- STORM STORM CATCH BASIN (ROUND CASTING)
- STORM SEWER CATCH BASIN (RECTANGULAR CASTING)
- PRECAST FLARED END SECTION
- PROPOSED CONTOUR
- WETLANDS
- FLOODPLAIN
- NORMAL WATER LEVEL (NWL)
- SF — SILT FENCE
- ORANGE SAFETY FENCE
- INLET PROTECTION (TYPE B)
- INLET PROTECTION (TYPE C)
- MEDIUM RIP RAP
- STRAW WADDLE
- CULVERT CHECK
- HYDROSEED (PER MANUFACTURER SPECIFICATIONS)
- EROSION CONTROL BLANKET (NORTH AMERICAN GREEN S75 OR EQUAL)
- TURF REINFORCEMENT MAT (NORTH AMERICAN GREEN TMAX OR EQUAL)

ALL WORK WITHIN PUBLIC R.O.W. AND PUBLIC EASEMENTS SHALL CONFORM TO THE VILLAGE OF PLEASANT PRAIRIE CHAPTER 405 CONSTRUCTION SPECIFICATIONS.

EXISTING CONDITIONS SURVEY:

EXISTING CONDITIONS SURVEY PROVIDED BY PINNACLE ENGINEERING GROUP. ALTHOUGH PEG HAS NO REASON TO BELIEVE THE SURVEY IS INACCURATE, PEG MAKES NO WARRANTS THAT EXISTING INFORMATION CONTAINED WITHIN THESE PLANS IS ALL-INCLUSIVE OR ACCURATE. CONTRACTOR SHALL UNDERTAKE NECESSARY EFFORTS TO VERIFY THE EXISTING CONDITIONS PRIOR TO THE START OF MATERIAL PROCUREMENT AND CONSTRUCTION EFFORTS/ACTIVITIES.

FUTURE AREAS ARE SHOWN FOR ILLUSTRATIVE PURPOSES ONLY. ANY FUTURE PARKING LOT EXPANSION AND/OR TRUCK DOORS/DOCKS OR TRAILING PARKING AREAS SHALL MEET CURRENT REQUIREMENTS IN EFFECT AT THE TIME OF THE PROPOSED EXPANSION.

TYPE C INLET PROTECTION, TYP.

MEDIUM RIP RAP, TYP. 10' X 10' APRON LENGTH

CONSTRUCTION ENTRANCE

BUILDING SETBACK LINE PER DOC. 1204261

20' GENERAL UTILITY EASEMENT PER C.S.M. NO. 2273

25' STORM SEWER, ACCESS AND MAINTENANCE EASEMENT PER C.S.M. NO. 2273

STORM WATER POND #1
N.W.L.=706.00
1-YR PEAK WSE=707.21
2-YR PEAK WSE=707.47
10-YR PEAK WSE=708.32
100-YR PEAK WSE=709.77

108th STREET

WETLANDS TO BE FILLED

DEDICATED PRIVATE STORMWATER EASEMENT

ORANGE SAFETY FENCE (TYP.)

12.0' (TYP.)

24.0' (TYP.)

STORM WATER POND #2
N.W.L.=705.00
1-YR PEAK WSE=706.63
2-YR PEAK WSE=706.90
10-YR PEAK WSE=707.82
100-YR PEAK WSE=708.70

PROPOSED BUILDING
152,334 S.F. | F.F.E.=717.50
(SEE ARCHITECTURAL PLANS)

SEE LANDSCAPE PLANS FOR ADDITIONAL FINAL GROUND COVER TYPES NOT COVERED ON THIS PLAN

TYPE B INLET PROTECTION, TYP.

100 YEAR FLOODPLAIN PER FEMA

SILT FENCE WITH ORANGE CONSTRUCTION FENCE

BUILDING SETBACK LINE PER DOC. 1204261

PROPOSED WETLAND IMPACTS- 48,364 S.F. (1.11 AC.)

FLOODPLAIN POST-PROJECT

WETLAND BOUNDARY POST-PROJECT

50' HIGHWAY SETBACK PER C.S.M. NO. 2273

NO ACCESS PER C.S.M. NO. 2273

SEE PUBLIC WATERMAIN PLANS FOR DETAILS

WETLANDS DELINEATED BY WETLAND & WATERWAY CONSULTING, LLC.

50' x 500' VISION CORNER EASEMENT PER C.S.M. NO. 2273

STATE TRUNK HIGHWAY "31"

MATCHLINE SEE SHEET C-14

NORTH

GRAPHICAL SCALE (FEET)
0 1" = 40' 80'

No.	DESCRIPTION
10	20' GENERAL UTILITY EASEMENT PER C.S.M. No. 2273
11	25' STORM SEWER, ACCESS AND MAINTENANCE EASEMENT PER C.S.M. No. 2273
12	PROPOSED DEDICATED STORMWATER EASEMENT
13	PROPOSED DEDICATED PUBLIC UTILITY EASEMENT
14	PROPOSED DEDICATED PUBLIC STREET
15	50' x 500' VISION CORNER EASEMENT PER C.S.M. No. 2273
16	FLOODPLAIN AREA BASED ON VILLAGE OF PLEASANT PRAIRIE FLOODPLAIN BOUNDARY ADJUSTMENT; STATE OF WISCONSIN DEPARTMENT OF NATURAL RESOURCES FLOODPLAIN ANALYSIS REVIEW, UN-NAMED TRIBUTARY NO. 1 TO THE DES PLAINS RIVER, VILLAGE OF PLEASANT PRAIRIE, KENOSHA COUNTY; AND FEDERAL EMERGENCY MANAGEMENT AGENCY (FEMA) CONDITIONAL LETTER OF MAP REVISION (CLOMR) CASE NO. 20-05-3166R FOR THE REVISION OF FLOOD INSURANCE RATE MAP COMMUNITY PANEL NO. 55059C0194D WITH AN EFFECTIVE DATE OF JUNE 19, 2012
17	WETLANDS DELINEATED BY LANDCO2 APRIL 2026 TO REMAIN
18	WETLANDS DELINEATED BY LANDCO2 APRIL 2026, TO BE FILLED

www.pinnacle-engr.com

REVIEWED:
DESIGNED: AJS
DRAFTED: AJS

PLAN | DESIGN | DELIVER
www.pinnacle-engr.com

PINNACLE ENGINEERING GROUP
ENGINEERING | NATURAL RESOURCES | SURVEYING

WISCONSIN OFFICE:
20725 WATERTOWN ROAD, SUITE 100
BROOKFIELD, WI 53186
(262) 754-8888
CHICAGO | MILWAUKEE | NATIONWIDE

ZILBER INDUSTRIAL 3 @ LAKEVIEW CORPORATE PARK

108TH STREET & GREEN BAY ROAD (STH "31")
VILLAGE OF PLEASANT PRAIRIE, KENOSHA COUNTY

EROSION CONTROL PLAN

REVISIONS

1	VOPP SITE PLAN SUBMITTAL	03/20/26	
2	VOPP RESUBMITTAL	05/11/26	
3	VOPP RESUBMITTAL	07/17/26	
4	VOPP RESUBMITTAL	10/02/26	

PEG JOB No. 644.00-WI
PEG PM AJS
START DATE 03/20/26
SCALE

SHEET
C-14
C-22

©COPYRIGHT 2019

EROSION CONTROL PLAN

Z:\PROJECTS\2016\644.00-WI\CAD\SHEETS\644.00-WI-SHEETS-EROSION CONTROL.DWG

THESE PLANS AND DESIGNS ARE COPYRIGHT PROTECTED AND MAY NOT BE USED IN WHOLE OR IN PART WITHOUT THE WRITTEN CONSENT OF PINNACLE ENGINEERING GROUP, LLC

www.pinnacle-engr.com

1.0 POTENTIAL POLLUTANT SOURCES

GIVEN THE PROPOSED ACTIVITY ON THE PROJECT SITE, THE PRIMARY POTENTIAL POLLUTANT SOURCE ASSOCIATED WITH THIS CONSTRUCTION PROJECT IS SOIL EROSION AND TRANSPORTATION; REFER TO SECTION 4 OF THIS PLAN. ADDITIONAL POTENTIAL SOURCES OF POLLUTION MAY INCLUDE: FUEL TANKS, WASTE CONTAINERS, OIL OR OTHER PETROLEUM PRODUCTS, DETERGENTS, PAINTS, CONSTRUCTION DEBRIS, SANITARY STATIONS, FERTILIZERS, AND DUST; REFER TO SECTION 5 OF THIS PLAN.

2.0 EROSION AND SEDIMENT CONTROL IMPLEMENTATION

THE FOLLOWING ARE DESCRIPTIONS OF THE EROSION AND SEDIMENT CONTROL PRACTICES THAT SHALL BE IMPLEMENTED DURING CONSTRUCTION OF THIS PROJECT. IN ADDITION TO THESE MEASURES, CONTRACTOR SHALL DISTURB ONLY AREAS NECESSARY TO COMPLETE THE CONSTRUCTION PROJECT. ALL PRACTICES SHALL BE CONDUCTED IN ACCORDANCE WITH THE BEST MANAGEMENT PRACTICES (BMP).

2.1 CONSTRUCTION AND EROSION CONTROL SEQUENCING

CONSTRUCTION SEQUENCING WILL BE UTILIZED AS A MEANS OF CONTROLLING EROSION AND LIMITING SEDIMENT TRANSPORT. SEQUENCING AS LISTED BELOW IS GENERAL IN NATURE AND MAY VARY DEPENDING ON WEATHER CONDITIONS AND/OR PHASING OF CONSTRUCTION. THE CONTRACTOR SHALL SUBMIT A DETAILED SITE SEQUENCING PLAN TO OWNER FOR APPROVAL AT LEAST 5 BUSINESS DAYS PRIOR TO COMMENCEMENT OF ANY CONSTRUCTION ACTIVITIES. CONTRACTOR MAY MODIFY SEQUENCING AFTER ITEM 6 AS NEEDED TO COMPLETE CONSTRUCTION ONLY IF EROSION CONTROLS ARE MAINTAINED IN ACCORDANCE WITH THE CONSTRUCTION SITE EROSION AND SEDIMENT CONTROL REQUIREMENTS.

1. INSTALL TEMPORARY CONSTRUCTION ENTRANCES, INLET PROTECTION ON EXISTING STORM SEWER AND CULVERT INLET LOCATIONS, AND PERIMETER SILT FENCING.
2. INSTALL SILT FENCING ALONG THE PERIMETER OF PROPOSED TOPSOIL STOCKPILE LOCATIONS. THE FIRST TOPSOIL DEPOSITED WITHIN THE STOCKPILE LIMITS SHALL BE PLACED TO CREATE TEMPORARY BERMING ALONG THE SILT FENCE TO PREVENT DIRECT STORMWATER RUNOFF AGAINST SILT FENCING. CONTRACTOR SHALL LIMIT LAND DISTURBING ACTIVITIES ASSOCIATED WITH TEMPORARY BERMING TO A MINIMUM.
3. STRIP TOPSOIL WITHIN THE LIMITS OF THE SEDIMENT TRAPS THAT WILL BE USED FOR TEMPORARY SEDIMENT CONTROL. STRIPPED TOPSOIL SHALL BE PLACED TO CONSTRUCT DIVERSION BERMING OR PLACED WITHIN THE STOCKPILE LIMITS.
4. STRIP TOPSOIL ALONG THE REMAINDER OF DIVERSION BERMING AND IMMEDIATELY PLACE TOPSOIL TO CREATE THE BERMING. MASS TOPSOIL STRIPPING SHALL NOT OCCUR UNTIL ALL DOWNSTREAM SEDIMENT CONTROLS ARE IN PLACE.
5. CONDUCT ROUGH GRADING OPERATIONS AND UTILITY PIPING INSTALLATION. DRAIN TILE SHALL NOT BE INSTALLED UNTIL UPLAND AREAS CONTRIBUTING STORMWATER RUNOFF ARE STABILIZED. DITCH CHECKS SHALL BE INSTALLED WITHIN DRAINAGE DITCHES IMMEDIATELY FOLLOWING CREATION OF DITCHES AND INLET PROTECTION SHALL BE INSTALLED TO PROTECT ANY STORM SEWER OR CULVERTS THAT WILL FUNCTION DURING CONSTRUCTION.
6. FINE GRADE SUB-GRADE SOILS WITHIN PAVEMENT AND BUILDING LIMITS. PLACE STONE BASE MATERIAL AS SOON AS POSSIBLE FOLLOWING COMPLETION OF FINE GRADING EFFORTS.
7. FINE GRADE REMAINING DISTURBED AREAS. PLACE SALVAGED TOPSOIL, EROSION BLANKETS/MATTING, AND SEED/MULCH AS SOON AS POSSIBLE FOLLOWING COMPLETION OF FINE GRADING EFFORTS.
8. EROSION CONTROLS SHALL NOT BE REMOVED UNTIL SITE IS FULLY STABILIZED OR 70% VEGETATIVE COVER IS ESTABLISHED. CONTRACTOR IS RESPONSIBLE FOR REMOVAL OF SILT FENCE, TEMPORARY FENCING/PRETECTION, DITCH CHECKS, AND OTHER TEMPORARY CONTROLS, AND RESTORATION PRACTICES AS NECESSARY, TO THE SATISFACTION OF THE OWNER.

2.2 STABILIZATION PRACTICES

THE DATES WHEN MAJOR GRADING ACTIVITIES OCCUR, WHEN CONSTRUCTION ACTIVITIES TEMPORARILY OR PERMANENTLY CEASE ON A PORTION OF THE SITE, AND WHEN STABILIZATION MEASURES ARE INITIATED, SHALL BE RECORDED ON THE STABILIZATION SCHEDULE FOR MAJOR GRADING ACTIVITIES.

STABILIZATION MEASURES SHALL BE INITIATED AS SOON AS PRACTICABLE IN PORTIONS OF THE SITE WHERE CONSTRUCTION ACTIVITIES HAVE TEMPORARILY OR PERMANENTLY CEASED. NO MORE THAN SEVEN (7) DAYS SHALL PASS AFTER THE CONSTRUCTION ACTIVITY IN THAT PORTION OF THE SITE HAS PERMANENTLY CEASED UNLESS:

THE INITIATION OF STABILIZATION MEASURES BY THE SEVENTH (7) DAY AFTER CONSTRUCTION ACTIVITY TEMPORARILY OR PERMANENTLY CEASE IS PRECLUDED BY SNOW COVER. IN THAT EVENT, STABILIZATION MEASURE SHALL BE INITIATED AS SOON AS PRACTICABLE.

CONSTRUCTION ACTIVITY WILL RESUME ON A PORTION OF THE SITE WITHIN FOURTEEN (14) DAYS FROM WHEN ACTIVITIES CEASED, (I.E. THE TOTAL TIME PERIOD THAT THE CONSTRUCTION ACTIVITY IS TEMPORARILY CEASED IS LESS THAN FOURTEEN (14) DAYS). IN THAT EVENT, STABILIZATION MEASURES DO NOT HAVE TO BE INITIATED ON THAT PORTION OF THE SITE BY THE SEVENTH (7) DAY AFTER CONSTRUCTION ACTIVITY HAS TEMPORARILY CEASED. SEE THE SOIL PROTECTION CHART PRESENTED IN THE CONSTRUCTION DOCUMENTS FOR RATES OF PERMANENT AND TEMPORARY VEGETATION.

STABILIZATION MEASURES SHALL BE DETERMINED BASED ON SITE CONDITIONS AT THE TIME CONSTRUCTION ACTIVITY HAS CEASED, INCLUDING BUT NOT LIMITED TO WEATHER CONDITIONS AND LENGTH OF TIME MEASURE MUST BE EFFECTIVE. THE FOLLOWING ARE ACCEPTABLE STABILIZATION MEASURES.

PERMANENT SEEDING; IN ACCORDANCE WITH APPROVED LANDSCAPING PLAN
TEMPORARY SEEDING MAY CONSIST OF SPRING OATS (100LBS/ACRE) AND/OR WHEAT OR CEREAL RYE (150LBS/ACRE)
HYDRO-MULCHING WITH A TACKIFIER
GEOTEXTILE EROSION MATTING
SODDING

CONTROL MEASURE GROUP	CONTROL MEASURE	CONTROL MEASURE CHARACTERISTICS
VEGETATIVE SOIL COVER	TEMPORARY SEEDING	PROVIDES QUICK TEMPORARY COVER TO CONTROL EROSION WHEN PERMANENT SEEDING IS NOT DESIRED OR TIME OF YEAR IS INAPPROPRIATE.
	PERMANENT SEEDING	PROVIDES PERMANENT VEGETATIVE COVER TO CONTROL EROSION, FILTERS SEDIMENT FROM WATER, MAY BE PART OF FINAL LANDSCAPE PLAN.
NON VEGETATIVE SOIL COVER	AGGREGATE COVER	PROVIDES TEMPORARY COVER ON ROADS AND PARKING LOTS AND AREAS WHERE VEGETATION CANNOT BE ESTABLISHED, PREVENTS MUD FROM BEING PICKED UP AND TRANSPORTED OFF-SITE.
	PAVING	PROVIDES PERMANENT COVER ON PARKING LOTS AND ROADS OR OTHER AREAS WHERE VEGETATION CANNOT BE ESTABLISHED.
DIVERSIONS	DIVERSION BERM / SWALE	DIVERTS RUNOFF TO A SEDIMENT TRAP OR OTHER CONTROL.
ENCLOSED DRAINAGE	STORM SEWER	CONVEYS SEDIMENT LADEN WATER TO A SEDIMENT BASIN.
OUTLETS	APRON ENDWALL OR RIPRAP	PROTECTS DOWNSTREAM CHANNEL FROM HIGH VELOCITY OF FLOW DISCHARGING FROM STRUCTURE.
SEDIMENT BASINS	TEMPORARY SEDIMENT TRAP	CONSTRUCTED TO REMOVE SILTATION FROM RUNOFF FROM SITE DIVERSION BERMS/SWALES AND IN OVERLAND FLOOD ROUTE. CAN BE CONVERTED TO PERMANENT SEDIMENT BASIN.
SEDIMENT FILTERS	SILT FENCE	PLACED DOWN SLOPE OF DISTURBED AREA TO KEEP RUNOFF CONTAINED ON-SITE.
	INLET PROTECTION	INSTALLED IN OPEN GRATE STRUCTURES TO COLLECT SEDIMENT.
	DITCH CHECK	PLACED IN DRAINAGE CHANNELS TO FILTER SEDIMENT FROM RUNOFF.
MUD AND DUST CONTROL	CONSTRUCTION ENTRANCE	REDUCES SOIL EROSION POLLUTANTS BEING TRANSPORTED OFF-SITE.
	STREET SWEEPING	REDUCES POLLUTANTS TRACKED FROM CONSTRUCTION SITE.
	DUST CONTROL	PREVENTS DUST FROM LEAVING CONSTRUCTION SITE.

STABILIZATION EFFECTIVENESS (TIME OF YEAR)

STABILIZATION TYPE	JAN.	FEB.	MAR.	APR.	MAY	JUNE	JULY	AUG.	SEPT.	OCT.	NOV.	DEC.
	STABILIZATION UTILIZATION PERIODS											
PERMANENT SEEDING			A	*	*	*	*	*	*			
DORMANT SEEDING	B										B	
TEMPORARY SEEDING			C	*	*	*	D *	*	*			
SODDING			E	*	*	*	*	*	*			

A. KENTUCKY BLUEGRASS 90 LBS/ACRE MIXED WITH PERENNIAL RYEGRASS 30 LBS/ACRE.
B. KENTUCKY BLUEGRASS 135 LBS/ACRE MIXED WITH PERENNIAL RYEGRASS 45 LBS/ACRE + 2 TONS STRAW MULCH/ACRE.
C. SPRING OATS 100 LBS/ACRE.
D. WHEAT OR CEREAL RYE 150 LBS/ACRE.
E. SOD.
F. STRAW MULCH 2 TONS/ACRE.
* IRRIGATION/WATERING REQUIRED TO SUPPORT ESTABLISHMENT AS NEEDED.

2.3 STRUCTURAL PRACTICES

THE FOLLOWING ARE DESCRIPTIONS OF STRUCTURAL PRACTICES TO BE IMPLEMENTED TO DIVERT FLOWS FROM EXPOSED SOILS, STORE FLOWS, OR OTHERWISE LIMIT THE DISCHARGE OF POLLUTANTS FROM EXPOSED AREAS OF THE SITE INCLUDING THE PROPOSED AND EXISTING WETLAND AREAS. SUCH PRACTICES COULD INCLUDE SILT FENCE, PROTECTION FENCE, CONSTRUCTION ENTRANCE, DITCH CHECK, EROSION CONTROL MATTING, DIVERSION BERM/SWALE, SEDIMENT TRAP, LEVEL SPREADER, INLET PROTECTION, OUTLET PROTECTION, AND TEMPORARY OR PERMANENT SEDIMENT BASIN. THE FOLLOWING STRUCTURAL PRACTICES ARE TO BE UTILIZED DURING THIS PROJECT.

SILT FENCE SHALL BE PLACED DOWN SLOPE OF DISTURBED AREAS OF THE CONSTRUCTION SITE AND AROUND THE PERIMETER OF THE TOPSOIL STOCKPILE. THIS INCLUDES PROTECTION OF EXISTING WETLAND AREAS TO BE MAINTAINED. SILT FENCE MAY ALSO BE USED AS A TEMPORARY CONTROL DEVICE WHERE SEDIMENTATION RUNOFF IS DISCOVERED.

CONSTRUCTION ENTRANCE SHALL BE INSTALLED TO REDUCE SOIL EROSION POLLUTANTS FROM LEAVING THE SITE DURING CONSTRUCTION ACTIVITIES. IF THE CRUSHED STONE DOES NOT ADEQUATELY REMOVE MUD FROM VEHICLE TIRES, THEY SHALL BE HOSED OFF BEFORE ENTERING A PAVED ROADWAY. ANY SOIL DEPOSITED ON THE PUBLIC PAVED ROAD WAY SHALL BE REMOVED IMMEDIATELY.

DITCH CHECK (STRAW BALES) SHALL BE INSTALLED IN DRAINAGE CHANNELS AS NEEDED.

EROSION CONTROL MATTING SHALL BE PLACED ON AREAS OR EMBANKMENTS HAVING SLOPES GREATER THAN OR EQUAL TO 3H:1V, BEFORE VEGETATION IS ESTABLISHED.

DIVERSION BERM/SWALE SHALL BE CONSTRUCTED TO DIVERT RUNOFF AROUND THE SITE AND TO DIVERT RUNOFF FROM THE DISTURBED AREA TO A SEDIMENT TRAP OR OTHER CONTROL. BERMS/SWALES SHALL BE STABILIZED WITH EQUIPMENT TRACKING AND TEMPORARY SEEDING.

SEDIMENT TRAPS/BASIN SHALL BE CONSTRUCTED TO COLLECT RUNOFF AND RUNOFF FROM SITE DIVERSION BERMS/SWALES.

INLET PROTECTION SHALL BE INSTALLED AT STORMWATER DRAINAGE INLETS TO REDUCE SEDIMENT WITHIN STORM SEWER CONVEYANCE FEATURES.

OUTLET SCOUR PROTECTION SHALL BE INSTALLED AT STORMWATER DRAINAGE OUTLETS TO DIFFUSE FLOWS.

3.0 ADDITIONAL PRACTICES

ADDITIONAL POLLUTANT CONTROL MEASURES TO BE IMPLEMENTED DURING CONSTRUCTION ACTIVITIES SHALL INCLUDE, BUT NOT BE LIMITED TO THE FOLLOWING.

CONSTRUCTION WASTE SHALL BE PROPERLY DISPOSED OF. THIS INCLUDES ALL CONSTRUCTION SITE WASTE MATERIAL, SANITARY WASTE, AND WASTE FROM VEHICLE TRACKING OF SEDIMENTS. THE CONTRACTOR SHALL ENSURE THAT NO MATERIAL WASTES OR UNUSED BUILDING MATERIALS SHALL BE BURIED, DUMPED, BURNED, OR DISCHARGED TO THE WATERS OF THE STATE. VEHICLES HAULING MATERIAL AWAY FROM THE SITE SHALL BE COVERED WITH A TARPAULIN TO PREVENT BLOWING DEBRIS.

DUST CONTROL SHALL BE ACCOMPLISHED BY ONE OR MORE OF THE FOLLOWING METHODS: COVERING 30% OR MORE OF THE SOIL SURFACE WITH A NON-ERODIBLE MATERIAL.

ROUGHENING (EQUIPMENT TRACKING) THE SOIL TO PRODUCE RIDGES PERPENDICULAR TO THE PREVAILING WIND. RIDGES SHALL BE AT LEAST SIX (6) INCHES IN HEIGHT.

FREQUENT WATERING OF EXCAVATION AND FILL AREAS.

PROVIDING GRAVEL OR PAVING AT ENTRANCE/EXIT DRIVES, PARKING AREAS AND TRANSIT PATHS.

STREET SWEEPING SHALL BE PERFORMED TO IMMEDIATELY REMOVE ANY SEDIMENT TRACKED ON PAVEMENTS.

4.0 EROSION AND SEDIMENT STRUCTURAL PRACTICE MAINTENANCE

THE FOLLOWING MAINTENANCE PRACTICES SHALL BE USED TO MAINTAIN, IN GOOD AND EFFECTIVE OPERATING CONDITIONS, VEGETATION, EROSION AND SEDIMENT CONTROL MEASURES, AND OTHER PROTECTIVE MEASURES IDENTIFIED IN THIS PLAN. UPON IDENTIFICATION, DEFICIENCIES IN STORMWATER CONTROLS SHALL BE ADDRESSED IMMEDIATELY. THE MAINTENANCE PROCEDURES FOR THIS DEVELOPMENT SHALL INCLUDE, BUT NOT BE LIMITED TO THE BELOW.

SILT FENCE - REPAIR OR REPLACE ANY DAMAGED FILTER FABRIC AND/OR STAKES. REMOVE ACCUMULATED SEDIMENT WHEN IT HAS REACHED ONE-HALF THE ABOVE GROUND HEIGHT OF THE FENCE.

CONSTRUCTION ENTRANCE - AS NEEDED, ADD STONE TO MAINTAIN CONSTRUCTION ENTRANCE DIMENSIONS AND EFFECTIVENESS.

DITCH CHECK (STRAW BALES) - RE-SECURE STAKES; ADJUST OR REPOSITION BALES TO ADDRESS PROPER FLOW OF STORMWATER; AND REMOVE ACCUMULATED SEDIMENT WHEN IT HAS REACHED ONE-HALF THE HEIGHT OF THE BALE.

EROSION CONTROL MATTING - REPAIR MATTING IMMEDIATELY IF INSPECTION REVEALS BREACHED OR FAILED CONDITIONS. REPAIR AND RE-GRADE SOIL WHERE CHANNELIZATION HAS OCCURRED.

DIVERSION BERM/SWALE - REPLACE OR RE-COMPACT THE CONSTRUCTION MATERIALS AS NECESSARY.

SEDIMENT TRAP - REMOVE AND DISPOSE OF THE ACCUMULATED SEDIMENT WHEN IT HAS REACHED THE SEDIMENT STORAGE ELEVATION.

INLET PROTECTION - CLEAN, REPAIR OR REPLACE FILTER FABRIC AND/OR STONE WHEN CONTROL MEASURE IS CLOGGED. INLET FILTER BAGS SHALL MBE REPLACED ONCE ONE-HALF FULL OF SEDIMENT.

OUTLET PROTECTION - CLEAN, REPAIR OR REPLACE FILTER FABRIC, TURF REINFORCEMENT MATTING AND/OR STONE WHEN CONTROL MEASURE IS ONE-HALF FULL OF SEDIMENT.

SEDIMENT BASIN - AT THE END OF CONSTRUCTION, CONTRACTOR SHALL REMOVE AND DISPOSE OF THE ACCUMULATED SEDIMENT AND RESTORE BASIN AREA TO INTENDED POST-CONSTRUCTION DESIGN GRADES.

5.0 INSPECTION

INSPECTIONS SHALL BE COMPLETED WITHIN TWENTY-FOUR (24) HOURS OF THE END OF A RAINFALL EVENT THAT IS ONE-HALF INCH OR GREATER OR EQUIVALENT SNOWFALL, OR AT A MINIMUM ONCE EVERY SEVEN (7) CALENDAR DAYS. INSPECTIONS SHALL BE UNDERTAKEN BY QUALIFIED PERSONNEL PROVIDED BY THE CONTRACTOR, AND SHALL INCLUDE: DISTURBED AREAS OF THE CONSTRUCTION SITE THAT HAVE NOT BEEN FINALLY STABILIZED, STRUCTURAL CONTROL MEASURES, AND LOCATIONS WHERE VEHICLES ENTER OR EXIT THE SITE. A STORMWATER POLLUTION PREVENTION PLAN INSPECTION REPORT SHALL BE COMPLETED AND ADDED TO THE SWPPP. RAINFALL SHALL BE RECORDED ON THE SWPPP RAINFALL LOG. CONTRACTOR SHALL IMMEDIATELY ARRANGE FOR REPAIR OR REPLACEMENT OF ANY DAMAGED OR DEFICIENT CONTROL MEASURES OBSERVED DURING THE INSPECTION.

QUALIFIED PERSONNEL MEANS A PERSON KNOWLEDGEABLE IN THE PRINCIPLES AND PRACTICES OF EROSION AND SEDIMENT CONTROL MEASURES, SUCH AS A LICENSED PROFESSIONAL ENGINEER, A CERTIFIED PROFESSIONAL IN EROSION AND SEDIMENT CONTROL, A CERTIFIED EROSION SEDIMENT OR STORMWATER INSPECTOR, OR OTHER TRAINED INDIVIDUAL.

6.0 SPILL PREVENTION

6.1 GENERAL MATERIAL MANAGEMENT PRACTICES

THE GOOD HOUSEKEEPING PRACTICES LISTED BELOW SHALL BE FOLLOWED THROUGHOUT THE CONSTRUCTION PROJECT.

1. CONTRACTOR SHALL STORE ONLY ENOUGH PRODUCTS REQUIRED TO COMPLETE THIS PROJECT.
2. ALL MATERIAL SHALL BE STORED IN A NEAT, ORDERLY MANNER IN THEIR ORIGINAL CONTAINERS CONTAINING MANUFACTURER'S LABEL.
3. MANUFACTURERS' RECOMMENDATIONS FOR PROPER USE AND DISPOSAL SHALL BE FOLLOWED.
4. MATERIALS REQUIRED TO HAVE A MATERIAL SAFETY DATA SHEET (MSDS) SHALL HAVE A COPY STORED IN THE PROJECT'S MSDS DATABASE.

6.2 SPILL CONTROL PRACTICES

THE PRACTICES LISTED BELOW SHALL BE FOLLOWED FOR SPILL PREVENTION AND CLEANUP.

1. MATERIALS AND EQUIPMENT NECESSARY FOR SPILL CLEANUP SHALL BE MAINTAINED ONSITE.
2. IMMEDIATELY UPON DISCOVERY, ALL SPILLS SHALL BE CLEANED UP ACCORDING TO THE MANUFACTURERS' RECOMMENDED METHODS.
3. PERSONNEL CLEANING UP A SPILL SHALL USE PERSONAL PROTECTIVE EQUIPMENT.
4. IMMEDIATELY UPON DISCOVERY, SPILLS OF TOXIC OR HAZARDOUS MATERIALS SHALL BE REPORTED TO THE OWNER AND GENERAL CONTRACTOR.
5. NOTIFICATION AND REPORTING TO THE APPROPRIATE FEDERAL, STATE, AND LOCAL GOVERNMENT AGENCIES SHALL BE MADE AS REQUIRED.

GENERAL INFORMATION:

THIS STORMWATER POLLUTION PREVENTION PLAN (SWPPP) HAS BEEN DEVELOPED TO FULFILL ONE OF THE REQUIREMENTS OF THE GENERAL ENVIRONMENTAL PROTECTION AGENCY (EPA) NATIONAL POLLUTION DISCHARGE ELIMINATION SYSTEM (WISCONSIN POLLUTION DISCHARGE ELIMINATION SYSTEM "WPDES" PERMIT NO. WI-S067831-4) FOR THE DISCHARGE OF STORMWATER ASSOCIATED WITH CONSTRUCTION PROJECTS DISTURBING ONE ACRE OR MORE. THE OWNER AND CONTRACTORS SHALL COMPLY WITH ALL REQUIREMENTS OF THE WPDES FOR ALL SUCH CONSTRUCTION PROJECTS. THE STORMWATER DISCHARGES ASSOCIATED WITH THE CONSTRUCTION ACTIVITY FROM THIS SITE ARE SUBJECT TO THE CONDITIONS AND REQUIREMENTS OF THE PERMITS.

THE EXECUTED OWNER CERTIFICATION AND THE CONTRACTOR CERTIFICATIONS SHALL BE KEPT ONSITE WITH THE APPROVED PLANS.

SWPPP AVAILABILITY:

THE OWNER SHALL RETAIN A COPY OF THE SWPPP AT THE CONSTRUCTION SITE FROM THE DATE OF THE PROJECT INITIATION TO THE DATE OF FINAL STABILIZATION.

KEEPING PLANS CURRENT:

THE CONTRACTOR SHALL AMEND THE PLAN WHENEVER THERE IS A CHANGE IN DESIGN, CONSTRUCTION, OPERATION, OR MAINTENANCE, WHICH HAS A SIGNIFICANT EFFECT ON THE POTENTIAL FOR THE DISCHARGE OF POLLUTANTS TO THE WATERS OF THE STATE AND WHICH HAS NOT OTHERWISE BEEN ADDRESSED IN THE PLAN OR IF THE PLAN PROVES TO BE INEFFECTIVE IN ELIMINATING OR SIGNIFICANTLY CONTROLLING POLLUTANTS IN STORMWATER DISCHARGES ASSOCIATED WITH CONSTRUCTION SITE ACTIVITY. IN ADDITION, THE THE PLAN SHALL BE AMENDED TO IDENTIFY ANY NEW CONTRACTOR AND/OR SUBCONTRACTOR THAT WILL IMPLEMENT A MEASURE OF THE PLAN. AMENDMENTS TO THE PLAN MAY BE REQUIRED BY THE MUNICIPALITY, OWNER, OR OTHER REVIEWING AGENCY. COPIES OF THE AMENDMENTS SHALL BE KEPT ONSITE AS PART OF THE SWPPP.

RETENTION OF RECORDS:

THE OWNER SHALL RETAIN COPIES OF THIS AND ALL REPORTS AND NOTICES REQUIRED BY THIS PERMIT, AND RECORDS OF ALL DATA USED TO COMPLETE THE NOTICE OF INTENT TO BE COVERED BY THIS PERMIT, FOR A PERIOD OF AT LEAST THREE YEARS FROM THE DATE PERMIT COVERAGE EXPIRES OR IS TERMINATED. THIS PERIOD MAY BE EXTENDED BY THE REQUEST OF THE AGENCY AT ANY TIME. IN ADDITION, THE OWNER SHALL RETAIN A COPY OF THE PLAN REQUIRED BY THIS PERMIT AT THE CONSTRUCTION SITE FROM THE DATE OF PROJECT INITIATION TO THE DATE OF FINAL STABILIZATION.

A NOTICE OF INTENT (NOI) APPLICATION MUST BE COMPLETED AND INCORPORATED INTO THE SWPPP.

WPDES NOTICE OF TERMINATION GUIDANCE:

WHEN A SITE HAS BEEN FINALLY STABILIZED AND ALL STORMWATER DISCHARGES FROM CONSTRUCTION SITES THAT ARE AUTHORIZED BY THE PERMIT ARE ELIMINATED, THE OWNER OF THE FACILITY MUST SUBMIT A COMPLETED NOTICE OF TERMINATION THAT IS SIGNED IN ACCORDANCE WITH THE PERMIT. CONTRACTOR SHALL SUBMIT A COMPLETED NOTICE OF TERMINATION TO OWNER FOR EXECUTION PRIOR TO THEIR FINAL PAY APPLICATION REQUEST.

Table 1 – Prescriptive Compliance Area Soil Stabilization

Prescriptive Compliance Areas	Bare Soil	Slope & Channel Management	Periods of Inactivity	Final Grade
Soil stockpiles that will exist for more than 7 days **Utility trench backfills** **Temporary ditches/swales that will exist for more than 7 days** **Permanent ditches/swales** **Small areas – Less than 1 acre and less than 1% of site** **Discrete areas – Less than 1 acre** **Storm water practice side slopes** **Slopes steeper than 20%**	Areas that Do Not Drain to Sediment Basins or Traps Limit the duration of soil exposure to no more than 30 days. Areas that Drain to Sediment Basins or Traps Limit the duration of soil exposure to no more than 90 days. However, use the duration from the soil loss and sediment discharge calculations for the other areas of the site if less than 90 days.	General Design and implement approved soil stabilization practices per DNR technical standards. Refer to WisDOT Slope & Channel Matrices for appropriate slope and slope length conditions. Slopes Steeper than 20% Provide stable diversion of off-site runoff around the slope. Provide slope interruption devices in accordance with Manufactured Perimeter Control & Slope Interruption Products Technical Standard 1071 or equivalent methods to reduce uninterrupted slope length.	Planned Inactivity Stabilize immediately if area will be left inactive for more than 14 days. Unplanned Inactivity Stabilize area immediately if period of inactivity reaches 14 days.	Permanent Features Stabilize area immediately after reaching final grade. Temporary Features Stabilize area immediately after establishment of temporary feature or reaching specified temporary grade.

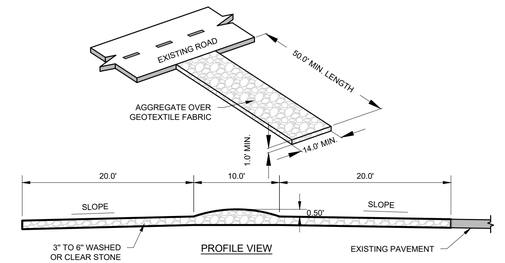

NOTES:

1. ALL TRACKING PAD MATERIALS AND INSTALLATION SHALL BE IN CONFORMANCE WITH WI DNR TECHNICAL STANDARD 1057.
2. TRACKING PADS SHALL BE INSTALLED PRIOR TO ANY TRAFFIC LEAVING THE SITE. CONTRACTOR SHALL VERIFY LOCATION WITH OWNER.
3. THE AGGREGATE FOR TRACKING PADS SHALL BE 3 TO 6 INCH CLEAR OR WASHED STONE. ALL MATERIALS TO BE RETAINED ON A 3-INCH SIEVE
4. THE AGGREGATE SHALL BE PLACED IN A LAYER AT LEAST 12-INCHES THICK. ON SITES WHERE SATURATED CONDITIONS ARE EXPECTED DURING THE LIFE OF THE PAD, THE PAD SHALL BE UNDERLAIN WITH GEOTEXTILE FABRIC WHICH MEETS MATERIAL SPECIFICATION 592 GEOTEXTILE, TABLE 1 OR 2, CLASS I, II OR IV, TO PREVENT MIGRATION OF UNDERLYING SOILS INTO THE STONE LAYER.
5. THE TRACKING PAD SHALL BE THE FULL WIDTH OF THE EGRESS POINT. MINIMUM WIDTH IS 14 FEET FOR ONE-WAY TRAFFIC AND 20 FEET FOR TWO-WAY TRAFFIC, WITH AN ADDITIONAL INCREASE OF 4 FEET FOR TRAILER TRAFFIC. THE TRACKING PAD SHALL BE A MINIMUM 50-FEET LONG.
6. ANY SEDIMENT TRACKED ONTO A PUBLIC OR PRIVATE ROAD SHOULD BE REMOVED BY STREET CLEANING, NOT FLUSHING, AT THE END OF EACH WORKING DAY.
7. TRACKING PADS SHALL, AT A MINIMUM, BE INSPECTED WEEKLY AND WITHIN 24-HOURS AFTER EVERY PRECIPITATION EVENT THAT PRODUCES 0.5-INCHES OF RAIN OR MORE DURING A 24-HOUR PERIOD.
8. THE TRACKING PAD PERFORMANCE SHALL BE MAINTAINED BY SCRAPING OR TOP-DRESSING WITH ADDITIONAL AGGREGATE.

CONSTRUCTION ENTRANCE

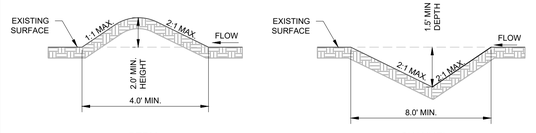

NOTES:

1. DIVERSION MAY REQUIRE AREAS OF BERM AND OTHER AREAS OF CHANNEL TO PROVIDE SUFFICIENT PERIMETER PROTECTION.
2. DIVERSION BERM VERSUS CHANNEL PRACTICES SHALL BE SELECTED SUCH TO PREVENT PONDING (E.G. - POSITIVE DRAINAGE SHALL BE MAINTAINED).
3. FOR DIVERSIONS THAT ARE TO SERVE LONGER THAN 30 DAYS, THE SIDE SLOPES INCLUDING THE RIDGE, AND THE DOWN SLOPE SIDE OF THE DIVERSION SHALL BE STABILIZED AS SOON AS THEY CONSTRUCTED BY EQUIPMENT TRACKING AND TEMPORARY SEEDING. FOR DIVERSIONS SERVING LESS THAN 30 DAYS, THE DOWN SLOPE SIDE OF THE DIVERSION SHALL BE STABILIZED AS SOON AS CONSTRUCTED BY EQUIPMENT TRACKING AND TEMPORARY SEEDING .
4. DIVERSIONS SHALL BE PROTECTED FROM DAMAGE BY CONSTRUCTION ACTIVITIES. AT ALL POINTS WHERE DIVERSION BERMS OR CHANNELS WILL BE CROSSED BY CONSTRUCTION EQUIPMENT, THE DIVERSION SHALL BE SHAPED APPROPRIATELY AND/OR TEMPORARY CULVERTS OF ADEQUATE CAPACITY MAYBE ADDED AT CROSSINGS.
5. AT MINIMUM, INSTALL ONE DITCH CHECK (SEE DETAIL) FOR EVERY 2 VERTICAL FEET OF DROP.
6. DIVERSIONS SHALL, AT A MINIMUM, BE INSPECTED WEEKLY AND WITHIN 24 HOURS AFTER EVERY PRECIPITATION EVENT THAT PRODUCES 0.5 INCHES OF RAIN OR MORE DURING A 24 HOUR PERIOD. MAINTENANCE SHALL BE COMPLETED AS SOON AS POSSIBLE WITH CONSIDERATION TO SITE CONDITIONS. ACCUMULATED SEDIMENT SHALL BE REMOVED WHEN IT REACHES HALF THE HEIGHT OF THE DIVERSION BERM.

DIVERSION BERM / CHANNEL

8113-A 10-02-17

REVIEWED:
DESIGNED: AJS
DRAFTED: AJS

PLAN | DESIGN | DELIVER
www.pinnacle-engr.com
PINNACLE ENGINEERING GROUP
ENGINEERING | NATURAL RESOURCES | SURVEYING
WISCONSIN OFFICE:
20725 WATERTOWN ROAD, SUITE 100
BROOKFIELD, WI 53186
(262) 754-8888
CHICAGO | MILWAUKEE : NATIONWIDE

ZILBER INDUSTRIAL 3 @ LAKEVIEW CORPORATE PARK

108TH STREET & GREEN BAY ROAD (STH "31")
VILLAGE OF PLEASANT PRAIRIE, KENOSHA COUNTY

CONSTRUCTION DETAILS

REVISIONS

1	VOPP SITE PLAN SUBMITTAL	03/20/26	
2	VOPP RESUBMITTAL	05/11/26	
3	VOPP RESUBMITTAL	07/17/26	
4	VOPP RESUBMITTAL	10/02/26	

PEG JOB No. 644.00-WI
PEG PM AJS
START DATE 03/20/26
SCALE N.T.S.

SHEET
C-15
C-22

© COPYRIGHT 2019

CONSTRUCTION DETAILS

Z:\PROJECTS\2016\644.00-WI\CAD\SHEETS\644.00-WI-SHEETS-CONSTRUCTION DETAILS.DWG

THESE PLANS AND DESIGNS ARE COPYRIGHT PROTECTED AND MAY NOT BE USED IN WHOLE OR IN PART WITHOUT THE WRITTEN CONSENT OF PINNACLE ENGINEERING GROUP, LLC

www.pinnacle-engr.com

SDD 08E10 Inlet Protection, Types A, B, C and D

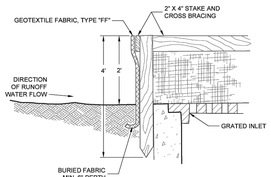

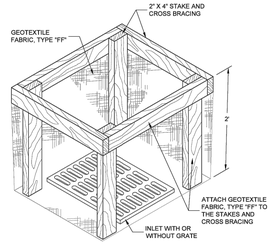

INLET PROTECTION, TYPE "A"

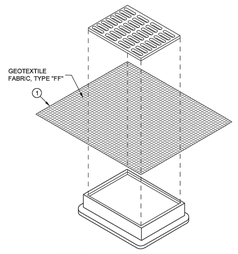

INLET PROTECTION, TYPE "B" (WITHOUT CURB BOX)
(CAN BE INSTALLED IN ANY INLET WITHOUT A CURB BOX)

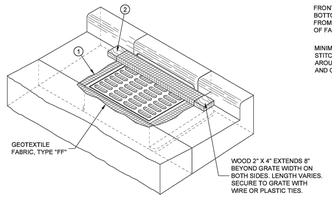

INLET PROTECTION, TYPE "C" (WITH CURB BOX)

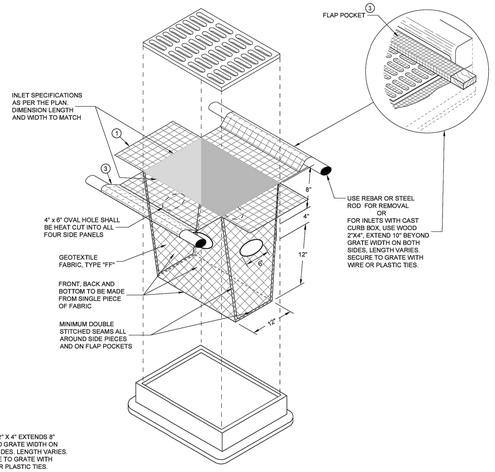

INLET PROTECTION, TYPE "D"
(CAN BE INSTALLED IN ANY INLET WITH OR WITHOUTA CURB BOX AS PER NOTE 2)

GENERAL NOTES

INLET PROTECTION DEVICES SHALL BE MAINTAINED OR REPLACED AT THE DIRECTION OF THE ENGINEER.

MANUFACTURED ALTERNATIVES APPROVED AND LISTED ON THE DEPARTMENT'S EROSION CONTROL PRODUCT ACCEPTABILITY LIST MAY BE SUBSTITUTED.

WHEN REMOVING OR MAINTAINING INLET PROTECTION, CARE SHALL BE TAKEN SO THAT THE SEDIMENT TRAPPED ON THE GEOTEXTILE FABRIC DOES NOT FALL INTO THE INLET. ANY MATERIAL FALLING INTO THE INLET SHALL BE REMOVED IMMEDIATELY.

1. FINISHED SIZE, INCLUDING FLAP POCKETS WHERE REQUIRED, SHALL EXTEND A MINIMUM OF 10" AROUND THE PERIMETER TO FACILITATE MAINTENANCE OR REMOVAL.
2. FOR INLET PROTECTION, TYPE C (WITH CURB BOX), AN ADDITIONAL 18" OF FABRIC IS WRAPPED AROUND THE WOOD AND SECURED WITH STAPLES. THE WOOD SHALL NOT BLOCK THE ENTIRE HEIGHT OF THE CURB BOX OPENING.
3. FLAP POCKETS SHALL BE LARGE ENOUGH TO ACCEPT WOOD 2X4.

INSTALLATION NOTES

TYPES B & C

TRIM EXCESS FABRIC IN THE FLOW LINE TO WITHIN 3" OF THE GRATE.

THE CONTRACTOR SHALL DEMONSTRATE A METHOD OF MAINTENANCE, USING A SEWN FLAP, HAND HOLDS OR OTHER METHOD TO PREVENT ACCUMULATED SEDIMENT FROM ENTERING THE INLET.

TYPE D

TRIM EXCESS FABRIC IN THE FLOW LINE TO WITHIN 3" OF THE GRATE.

DO NOT INSTALL INLET PROTECTION TYPE D IN INLETS SHALLOWER THAN 30", MEASURED FROM THE BOTTOM OF THE INLET TO THE TOP OF THE GRATE.

THE INSTALLED BAG SHALL HAVE A MINIMUM SIDE CLEARANCE, BETWEEN THE INLET WALLS AND THE BAG, MEASURED AT THE BOTTOM OF THE OVERFLOW HOLES, OF 3". WHERE NECESSARY THE CONTRACTOR SHALL CINCH THE BAG, USING PLASTIC ZIP TIES, TO ACHIEVE THE 3" CLEARANCE. THE TIES SHALL BE PLACED AT A MAXIMUM OF 4" FROM THE BOTTOM OF THE BAG.

INLET PROTECTION TYPES A, B, C AND D

STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION

APPROVED 10/16/02 (DATE) /S/ Beth Cannestra (ROADWAY STANDARDS DEVELOPMENT ENGINEER)

FHWA

SDD 08E10 - 02

6

SDD 08E10 - 02

6

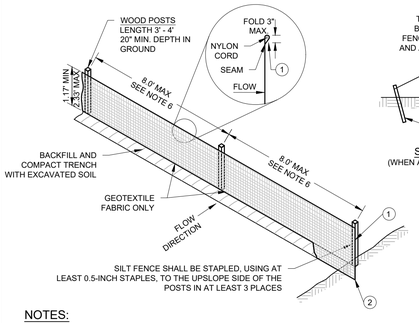



SILT FENCE TIE BACK
(WHEN ADDITIONAL SUPPORT REQUIRED)



NOTE: ADDITIONAL POST DEPTH OR TIE BACKS MAY BE REQUIRED IN UNSTABLE SOILS

TRENCH DETAIL

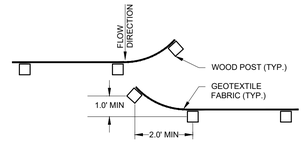

JOINT (HOOK METHOD)

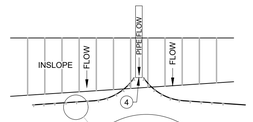

TYPICAL SECTION
**GEOTEXTILE FABRIC

SILT FENCE ALONG SLOPES & OUTFALLS



JOINT (TWIST METHOD)

NOTES:

1. GEOTEXTILE FABRIC SHALL MEET THE REQUIREMENTS OF MATERIAL SPECIFICATION 592 GEOTEXTILE TABLE 1 OR 2, CLASS I WITH EQUIVALENT OPENING SIZE OF AT LEAST 30 FOR NONWOVEN AND 50 FOR WOVEN.
2. SILT FENCE SHALL BE ANCHORED BY SPREADING AT LEAST 8-INCHES OF FABRIC IN A 4-INCH WIDE AND 6-INCH DEEP TRENCH OR 6-INCH DEEP V-TRENCH ON THE UPSLOPE SIDE OF THE FENCE. TRENCHES SHALL NOT BE EXCAVATED WIDER OR DEEPER THAN NECESSARY FOR PROPER INSTALLATION.
3. FOLD MATERIAL TO FIT TRENCH AND BACKFILL AND COMPACT TRENCH WITH EXCAVATED SOIL.
4. WOOD POSTS SHALL BE A MINIMUM SIZE OF 1.125-INCHES x 1.125-INCHES OF DRIED OAK OR HICKORY.
5. SILT FENCE TO EXTEND ABOVE THE TOP OF PIPE, WHERE APPLICABLE.
6. POST SPACING SHALL BE SELECTED BASED ON GEOTEXTILE FABRIC (8-FEET FOR WOVEN AND 3-FEET FOR NON-WOVEN).

SILT FENCE

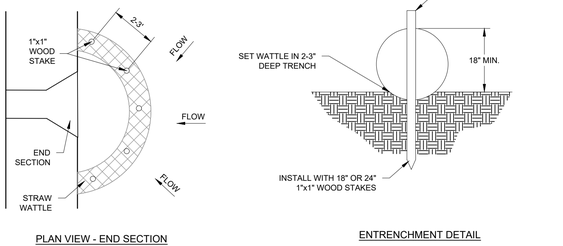

PLAN VIEW - END SECTION

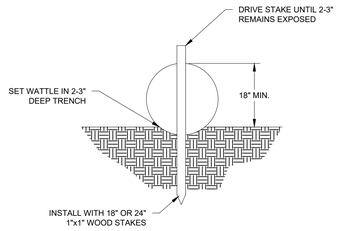

ENTRENCHMENT DETAIL

NOTES:

1. REMOVE ACCUMULATED SEDIMENT FROM THE FACE OF THE WATTLE WHEN THE SEDIMENT ACCUMULATION IS HALF THE HEIGHT OF THE WATTLE.
2. INSPECT AFTER EVERY RAINFALL EVENT.

CULVERT CHECK

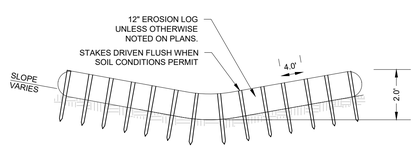

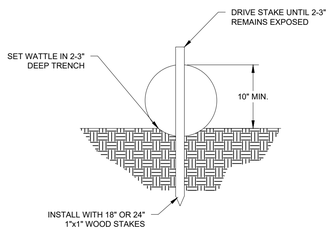

ENTRENCHMENT DETAIL

#138 05/21/2019

STRAW WATTLE

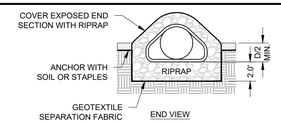

END VIEW

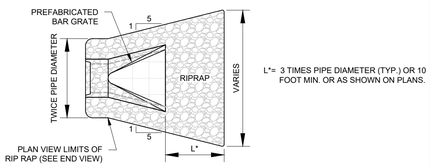

PLAN VIEW

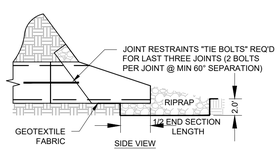

SIDE VIEW

NOTES:

1. RIP RAP AND GEOTEXTILE FABRIC SHALL MEET REQUIREMENTS FOR STANDARD SPECIFICATIONS FOR HIGHWAY AND STRUCTURE CONSTRUCTION.

RIP RAP AT END SECTIONS

REVIEWED:
DESIGNED: AJS
DRAFTED: AJS

PLAN I DESIGN I DELIVER
www.pinnacle-engr.com

PINNACLE ENGINEERING GROUP
ENGINEERING I NATURAL RESOURCES I SURVEYING

WISCONSIN OFFICE:
20725 WATERTOWN ROAD, SUITE 100
BROOKFIELD, WI 53186
(262) 754-8888
CHICAGO I MILWAUKEE : NATIONWIDE

ZILBER INDUSTRIAL 3 @ LAKEVIEW CORPORATE PARK

108TH STREET & GREEN BAY ROAD (STH "31")
VILLAGE OF PLEASANT PRAIRIE, KENOSHA COUNTY

CONSTRUCTION DETAILS

REVISIONS

1	VOPP SITE PLAN SUBMITTAL	03/20/26			
2	VOPP RESUBMITTAL	05/11/26			
3	VOPP RESUBMITTAL	07/17/26			
4	VOPP RESUBMITTAL	10/02/26			

PEG JOB No. 644.00-WI
PEG PM AJS
START DATE 03/20/26
SCALE N.T.S.

SHEET
C-16
C-22

CONSTRUCTION DETAILS

©COPYRIGHT 2019

Z:\PROJECTS\2016\644.00-WI\CAD\SHEETS\644.00-WI-SHEETS-CONSTRUCTION DETAILS.DWG

THESE PLANS AND DESIGNS ARE COPYRIGHT PROTECTED AND MAY NOT BE USED IN WHOLE OR IN PART WITHOUT THE WRITTEN CONSENT OF PINNACLE ENGINEERING GROUP, LLC

www.pinnacle-engr.com

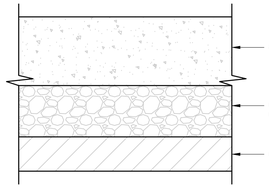

HEAVY DUTY CONCRETE PAVEMENT SECTION

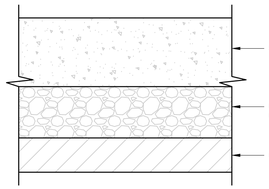

LIGHT DUTY CONCRETE PAVEMENT SECTION

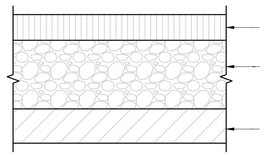

LIGHT DUTY PAVEMENT SECTION

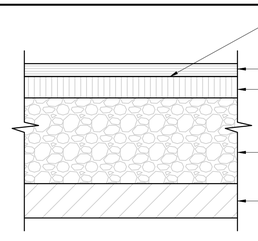

HEAVY DUTY PAVEMENT SECTION

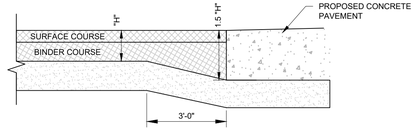

THICKENED ASPHALT EDGE

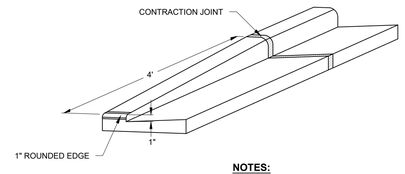

NOTES:

1. CONTRACTION JOINTS SHALL BE PLACED EVERY 10 FEET
2. EXPANSION JOINTS (3/4" EXPANSION FIBER MATERIAL) SHALL BE PLACED EVERY 300 FEET AND AT EVERY PC/PT AND 3 FEET FROM STRUCTURES

TAPER CURB HEAD

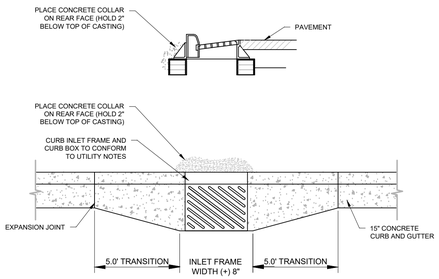

NOTE : CURB CONTRACTOR TO VERIFY POSITION AND ELEVATION OF FRAME AND GRATE PRIOR TO POUR. IF NOT CORRECT, FIVE (5) FOOT TRANSITION AREA TO BE LEFT UNPOURED UNTIL SITUATION IS CORRECTED BY CONTRACTOR.

CURB AND GUTTER BUMP OUT

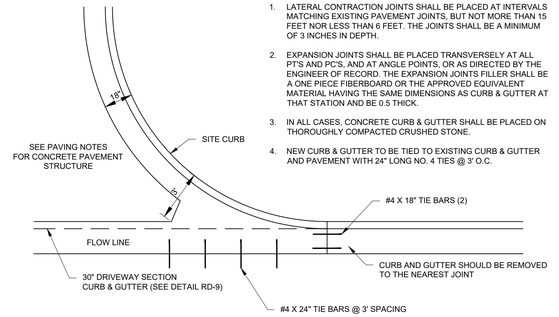

NOTES:

1. LATERAL CONTRACTION JOINTS SHALL BE PLACED AT INTERVALS MATCHING EXISTING PAVEMENT JOINTS, BUT NOT MORE THAN 15 FEET NOR LESS THAN 6 FEET. THE JOINTS SHALL BE A MINIMUM OF 3 INCHES IN DEPTH.
2. EXPANSION JOINTS SHALL BE PLACED TRANSVERSELY AT ALL PT'S AND PC'S, AND AT ANGLE POINTS, OR AS DIRECTED BY THE ENGINEER OF RECORD. THE EXPANSION JOINTS FILLER SHALL BE A ONE PIECE FIBERBOARD OR THE APPROVED EQUIVALENT MATERIAL HAVING THE SAME DIMENSIONS AS CURB & GUTTER AT THAT STATION AND BE 0.5 THICK.
3. IN ALL CASES, CONCRETE CURB & GUTTER SHALL BE PLACED ON THOROUGHLY COMPACTED CRUSHED STONE.
4. NEW CURB & GUTTER TO BE TIED TO EXISTING CURB & GUTTER AND PAVEMENT WITH 24" LONG NO. 4 TIES @ 3' O.C.

DRIVEWAY ENTRANCE

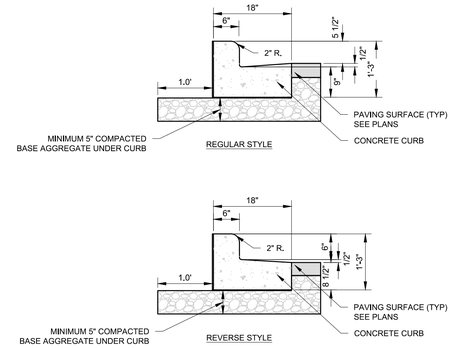

NOTES:

1. LATERAL CONTRACTION JOINTS SHALL BE PLACED AT INTERVALS OF NOT MORE THAN 15 FEET NOR LESS THAN 6 FEET, THE JOINTS SHALL BE A MINIMUM OF 3 INCHES IN DEPTH.
2. EXPANSION JOINTS SHALL BE PLACED TRANSVERSELY AT RADIUS POINTS ON CURVES OF RADIUS 200 FEET OR LESS, AND AT ANGLE POINTS, OR AS DIRECTED BY THE ENGINEER OF RECORD. THE EXPANSION JOINTS FILLER SHALL BE A ONE PIECE FIBERBOARD OR THE APPROVED EQUIVALENT MATERIAL HAVING THE SAME DIMENSIONS AS CURB & GUTTER AT THAT STATION AND BE 0.5 INCH THICK.
3. IN ALL CASES, CONCRETE CURB & GUTTER SHALL BE PLACED ON THOROUGHLY COMPACTED CRUSHED STONE.
4. REVERSE STYLE CURB LOCATIONS ARE NOTED ON THE PLANS.

18" VERTICAL FACE CURB

NOTES:

1. DAMAGED CURB / GUTTER SECTIONS SHALL BE REMOVED TO THE NEAREST JOINT.
2. CURB AND GUTTER CONSTRUCTED ADJACENT TO EXISTING CURB AND GUTTER SHALL BE INSTALLED USING TWO (2) NO.4 (1/2-INCH), 18-INCH LONG TIE BARS, EVENLY SPACED, DRIVEN 9-INCHES INTO THE EXISTING CURB AND GUTTER.
3. WHERE ADJACENT PAVEMENT SECTION CONTAINS CONCRETE THE GUTTER THICKNESS SHALL EXTEND TO THE BOTTOM OF THE ADJACENT CONCRETE PAVEMENT. CURB AND GUTTER SHALL BE TIED INTO ADJACENT COMPOSITE PAVEMENT WITH #4 X 2'0" LONG TIE BARS AT 3' SPACING.

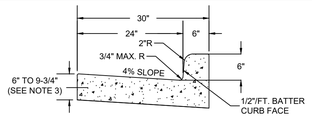

30" VERTICAL FACE CURB AND GUTTER



30" DEPRESSED CURB AND GUTTER AT DRIVEWAYS

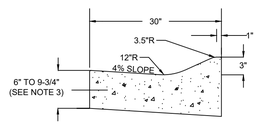

30" MOUNTABLE CURB AND GUTTER

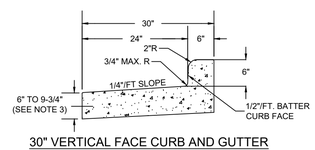

30" VERTICAL FACE CURB AND GUTTER (REVERSE SLOPE GUTTER)

SCALE: NTS

STANDARD CURB & GUTTER DETAILS

DETAIL: RD - 9	VILLAGE OF PLEASANT PRAIRIE
DATE: 6-5-20	KENOSHA COUNTY, WISCONSIN

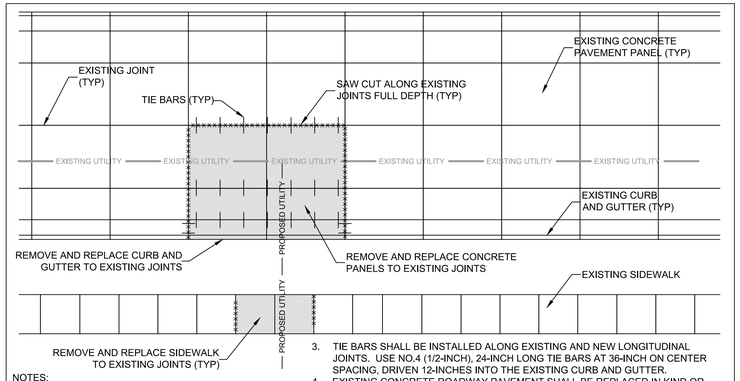

NOTES:

1. ANY PAVEMENT, CURB AND GUTTER OR SIDEWALK DAMAGED OR UNDERMINED SHALL BE REMOVED AND REPLACED TO THE NEAREST JOINT.
2. CURB AND GUTTER SHALL BE INSTALLED USING TWO (2) NO.4 (1/2-INCH), 18-INCH LONG TIE BARS, EVENLY SPACED, DRIVEN 9-INCHES INTO THE EXISTING CURB AND GUTTER.
3. TIE BARS SHALL BE INSTALLED ALONG EXISTING AND NEW LONGITUDINAL JOINTS. USE NO.4 (1/2-INCH), 24-INCH LONG TIE BARS AT 36-INCH ON CENTER SPACING, DRIVEN 12-INCHES INTO THE EXISTING CURB AND GUTTER.
4. EXISTING CONCRETE ROADWAY PAVEMENT SHALL BE REPLACED IN KIND OR WITH A MINIMUM OF 8-INCHES OF BASE AGGREGATE DENSE AND 8-INCHES OF CONCRETE PAVEMENT, WHICHEVER IS GREATER.
5. EXISTING COMPOSITE ROADWAY PAVEMENT SHALL BE REPLACED IN KIND OR WITH A MINIMUM OF 8-INCHES OF BASE AGGREGATE DENSE, 7-INCHES OF CONCRETE PAVEMENT (8-INCHES ON INDUSTRIAL ROAD AND COLLECTORS), AND 1.75-INCHES OF ASPHALTIC CONCRETE SURFACE, WHICHEVER IS GREATER.
6. REFER TO VILLAGE SPECIFICATIONS FOR ADDITIONAL REQUIREMENTS.

UTILITY PATCH DETAIL (COMPOSITE AND CONCRETE ROADWAYS)

DETAIL: RD - 15	VILLAGE OF PLEASANT PRAIRIE
DATE: 12-17-18	KENOSHA COUNTY, WISCONSIN

REVIEWED:
DESIGNED: AJS
DRAFTED: AJS

PLAN | DESIGN | DELIVER
www.pinnacle-engr.com
PINNACLE ENGINEERING GROUP
ENGINEERING | NATURAL RESOURCES | SURVEYING
WISCONSIN OFFICE:
20725 WATERTOWN ROAD, SUITE 100
BROOKFIELD, WI 53186
(262) 754-8888
CHICAGO | MILWAUKEE : NATIONWIDE

ZILBER INDUSTRIAL 3 @ LAKEVIEW CORPORATE PARK

108TH STREET & GREEN BAY ROAD (STH "31")
VILLAGE OF PLEASANT PRAIRIE, KENOSHA COUNTY

CONSTRUCTION DETAILS

REVISIONS

1	VOPP SITE PLAN SUBMITTAL	03/20/26	
2	VOPP RESUBMITTAL	05/11/26	
3	VOPP RESUBMITTAL	07/17/26	
4	VOPP RESUBMITTAL	10/02/26	

PEG JOB No. 644.00-WI AJS
PEG PM
START DATE 03/20/26
SCALE N.T.S.

SHEET
C-17
C-22

© COPYRIGHT 2019

CONSTRUCTION DETAILS

Z:\PROJECTS\2016\644.00-WI\CAD\SHEETS\644.00-WI-SHEETS-CONSTRUCTION DETAILS.DWG

THESE PLANS AND DESIGNS ARE COPYRIGHT PROTECTED AND MAY NOT BE USED IN WHOLE OR IN PART WITHOUT THE WRITTEN CONSENT OF PINNACLE ENGINEERING GROUP, LLC

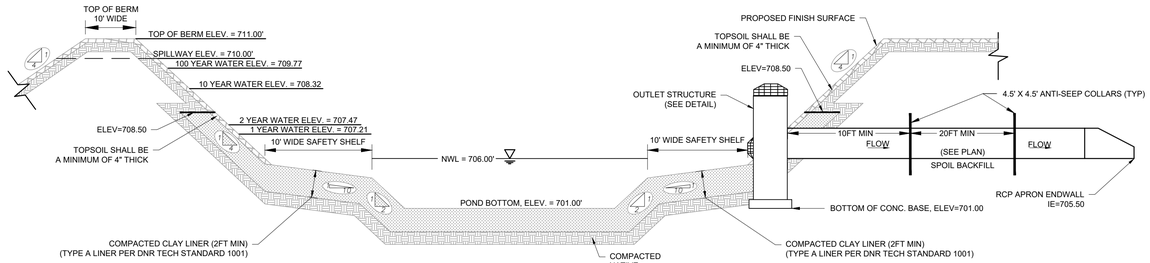

GENERAL NOTES:

1. ALL CONSTRUCTION SHALL MEET THE SPECIFICATIONS OF "WDNR WET DETENTION BASIN TECHNICAL STANDARD 1001".
2. ALL WORK TO BE CONDUCTED IN CONFORMANCE WITH THE STORM WATER MANAGEMENT PLAN FOR THE PROJECT SITE AS APPROVED BY THE REGULATORY ENGINEER OF RECORD.
3. RCP PIPING & INSTALLATION WITHIN THE BASIN SHALL BE IN ACCORDANCE WITH (ASTM C-76/C443) WITH RUBBER GASKETS.
4. OWNER OR CONTRACTOR MUST CONSULT LANDSCAPE ARCHITECT OR ECOLOGICAL PLANNING AGENCY FOR APPROPRIATE PLANTS AND PLANTING CONFIGURATIONS.
5. CLAY LINER SHALL BE A MINIMUM OF 2-FEET THICK. CLAY SHALL BE COMPACTED AT ±2.0% OPTIMAL MOISTURE CONTENT TO 90% MODIFIED PROCTOR. MEDIUM STIFF TO STIFF CLAYS PRESENT IN-PLACE AT THE POND SIDE SLOPES OR OTHER ONSITE MEDIUM STIFF TO STIFF CLAYS MAY BE USED AT THE DISCRETION OF THE GEOTECHNICAL ENGINEER OF RECORD.
6. FOR CONSTRUCTED EMBANKMENTS WHERE THE PERMANENT POOL IS PONDED 3-FEET OR MORE AGAINST THE EMBANKMENT, THERE SHALL BE A CORE TRENCH OR KEYWAY ALONG THE CENTERLINE OF THE EMBANKMENT UP TO THE PERMANENT POOL ELEVATION. THE CORE TRENCH OR KEYWAY SHALL BE A MINIMUM OF 2-FEET DEEP AND 8-FEET WIDE WITH A SIDE SLOPE OF 1:1 OR FLATTER.

STORMWATER POND #1 CROSS SECTION

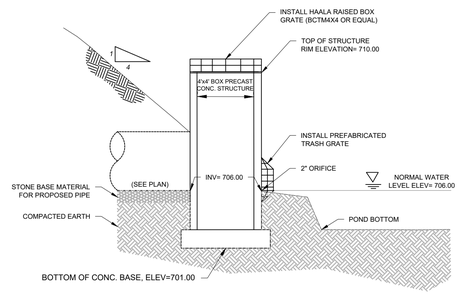

POND #1 OUTLET STRUCTURE

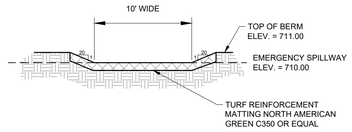

NOTES:

1. EXTEND MATTING 2' BELOW THE ELEVATION OF THE EMERGENCY SPILLWAY ON THE INSIDE OF THE POND.
2. EXTEND MATTING TO TOE OF SLOPE ON THE OUTSIDE OF THE POND.
3. MATTING SHALL BE INSTALLED IN ACCORDANCE WITH WDNR TECH STANDARD 1052.

POND #1 EMERGENCY SPILLWAY

GENERAL NOTES:

1. ALL CONSTRUCTION SHALL MEET THE SPECIFICATIONS OF "WDNR WET DETENTION BASIN TECHNICAL STANDARD 1001".
2. ALL WORK TO BE CONDUCTED IN CONFORMANCE WITH THE STORM WATER MANAGEMENT PLAN FOR THE PROJECT SITE AS APPROVED BY THE REGULATORY ENGINEER OF RECORD.
3. RCP PIPING & INSTALLATION WITHIN THE BASIN SHALL BE IN ACCORDANCE WITH (ASTM C-76/C443) WITH RUBBER GASKETS.
4. OWNER OR CONTRACTOR MUST CONSULT LANDSCAPE ARCHITECT OR ECOLOGICAL PLANNING AGENCY FOR APPROPRIATE PLANTS AND PLANTING CONFIGURATIONS.
5. CLAY LINER SHALL BE A MINIMUM OF 2-FEET THICK. CLAY SHALL BE COMPACTED AT ±2.0% OPTIMAL MOISTURE CONTENT TO 90% MODIFIED PROCTOR. MEDIUM STIFF TO STIFF CLAYS PRESENT IN-PLACE AT THE POND SIDE SLOPES OR OTHER ONSITE MEDIUM STIFF TO STIFF CLAYS MAY BE USED AT THE DISCRETION OF THE GEOTECHNICAL ENGINEER OF RECORD.
6. FOR CONSTRUCTED EMBANKMENTS WHERE THE PERMANENT POOL IS PONDED 3-FEET OR MORE AGAINST THE EMBANKMENT, THERE SHALL BE A CORE TRENCH OR KEYWAY ALONG THE CENTERLINE OF THE EMBANKMENT UP TO THE PERMANENT POOL ELEVATION. THE CORE TRENCH OR KEYWAY SHALL BE A MINIMUM OF 2-FEET DEEP AND 8-FEET WIDE WITH A SIDE SLOPE OF 1:1 OR FLATTER.

STORMWATER POND #2 CROSS SECTION

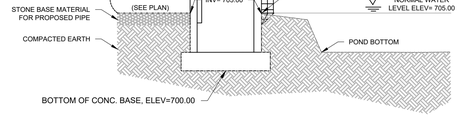

POND #2 OUTLET STRUCTURE

NOTES:

1. EXTEND MATTING 2' BELOW THE ELEVATION OF THE EMERGENCY SPILLWAY ON THE INSIDE OF THE POND.
2. EXTEND MATTING TO TOE OF SLOPE ON THE OUTSIDE OF THE POND.
3. MATTING SHALL BE INSTALLED IN ACCORDANCE WITH WDNR TECH STANDARD 1052.

POND #2 EMERGENCY SPILLWAY

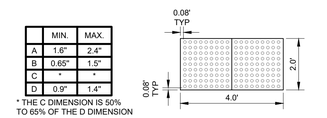

	MIN.	MAX.
A	1.6"	2.4"
B	0.65"	1.5"
C	*	*
D	0.9"	1.4"

* THE C DIMENSION IS 50% TO 65% OF THE D DIMENSION

DETECTABLE WARNING FIELD (TYPICAL)**

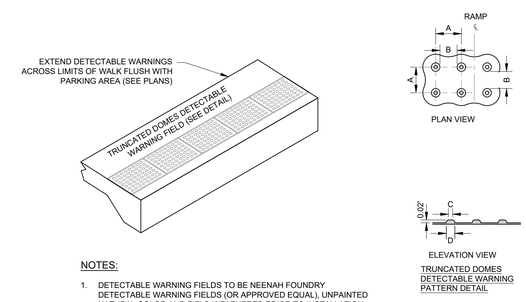

TRUNCATED DOMES DETECTABLE WARNING PATTERN DETAIL

NOTES:

1. DETECTABLE WARNING FIELDS TO BE NEENAH FOUNDRY DETECTABLE WARNING FIELDS (OR APPROVED EQUAL), UNPAINTED NATURAL COLOR AND FIELD WEATHERED PRIOR TO INSTALLATION (VERIFY COLOR WITH OWNER PRIOR TO INSTALLATION.

DETECTABLE WARNING TRUNCATED DOMES

REVIEWED:
DESIGNED: AJS
DRAFTED: AJS

PLAN | DESIGN | DELIVER
www.pinnacle-engr.com

PINNACLE ENGINEERING GROUP
ENGINEERING | NATURAL RESOURCES | SURVEYING

WISCONSIN OFFICE:
20725 WATERTOWN ROAD, SUITE 100
BROOKFIELD, WI 53186
(262) 754-8888
CHICAGO | MILWAUKEE : NATIONWIDE

ZILBER INDUSTRIAL 3 @ LAKEVIEW CORPORATE PARK

108TH STREET & GREEN BAY ROAD (STH "31")
VILLAGE OF PLEASANT PRAIRIE, KENOSHA COUNTY

CONSTRUCTION DETAILS

REVISIONS

1	VOPP SITE PLAN SUBMITTAL	03/20/26	___	_____
2	VOPP RESUBMITTAL	05/11/26	___	_____
3	VOPP RESUBMITTAL	07/17/26	___	_____
4	VOPP RESUBMITTAL	10/02/26	___	_____

PEG JOB No. 644.00-WI
PEG PM AJS
START DATE 03/20/26
SCALE N.T.S.

SHEET
C-18
C-22

CONSTRUCTION DETAILS

© COPYRIGHT 2019

www.pinnacle-engr.com

Z:\PROJECTS\2016\644.00-WI\CAD\SHEETS\644.00-WI-SHEETS-CONSTRUCTION DETAILS.DWG

THESE PLANS AND DESIGNS ARE COPYRIGHT PROTECTED AND MAY NOT BE USED IN WHOLE OR IN PART WITHOUT THE WRITTEN CONSENT OF PINNACLE ENGINEERING GROUP, LLC

www.pinnacle-engr.com

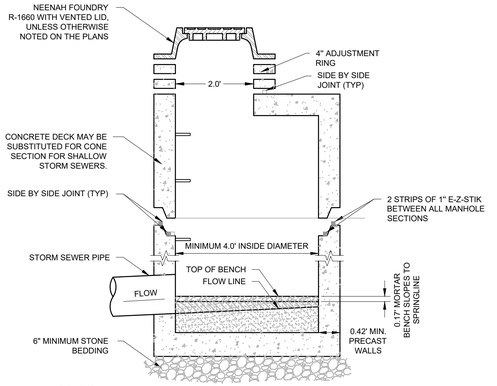

NOTES:

1. CLEAN UNDERSIDE OF ADJUSTING RING OR CAST IRON FRAME AND SET IN PLACE.
2. TUCK POINT MORTAR INTO ANNULAR CRACK AND BACKPLASTERED INSIDE AND OUTSIDE OF ALL JOINTS.
3. THE FLAT TOP MAY BE USED IN LIEU OF THE TAPERED TOP WHEN FIELD CONDITIONS PROHIBIT THE USE OF A FLAT TAPERED TOP.
4. MANHOLE CONSTRUCTION TO MEET REQUIREMENTS OF ASTM C478.
5. ECCENTRIC CONE SECTION OF MANHOLE TO BE SET OUTSIDE OF VEHICULAR WHEEL PATH NEAR ℄ OF ROADWAY.

STORM SEWER MANHOLE

#301_04/26/17

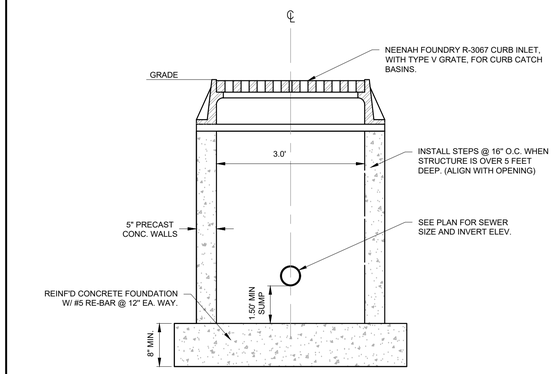

NOTES:

1. EASY STICK, RUBBER GASKET OR APPROVED EQUIVALENT SHALL BE PLACED AT ALL JOINTS BETWEEN ADJUSTING RINGS FOR STORM CATCH BASINS.
2. THE FLAT TOP MAY BE USED IN LIEU OF THE TAPERED TOP WHEN FIELD CONDITIONS PROHIBIT USE OF A TAPERED TOP.

2' x 3' CATCH BASIN

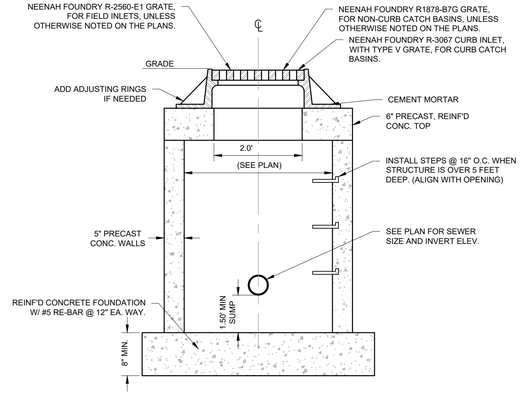

NOTES:

1. EASY STICK, RUBBER GASKET OR APPROVED EQUIVALENT SHALL BE PLACED AT ALL JOINTS BETWEEN ADJUSTING RINGS FOR STORM CATCH BASINS.
2. THE FLAT TOP MAY BE USED IN LIEU OF THE TAPERED TOP WHEN FIELD CONDITIONS PROHIBIT USE OF A TAPERED TOP.
3. STRUCTURE TO BE 4.0' DIA. OR AS INDICATED ON THE PLANS.

CATCH BASIN

#302_10-04-17

DRAIN TILE GENERAL SPECIFICATIONS

1. THE DRAIN TILE CONDUIT AND FITTINGS SHALL MEET STRENGTH AND DURABILITY REQUIREMENTS FOR THE SITE. ALL CONDUITS AND FITTINGS SHALL MEET OR EXCEED THE MINIMUM REQUIREMENTS OF THE APPROPRIATE SPECIFICATIONS PUBLISHED BY THE AMERICAN SOCIETY FOR TESTING AND MATERIALS. CORRUGATED HIGH DENSITY POLYETHYLENE (HDPE) CONDUIT AND FITTINGS SHALL MEET THE REQUIREMENTS OF ASTM M252. CONDUIT TYPE (SINGLE WALL OR DUAL WALL) SHALL INSTALLED PER THE LOCATIONS SHOWN IN THE PLANS. CONTRACTOR MAY SUBSTITUTE DUAL WALL CONDUIT AT LOCATIONS SPECIFIED FOR SINGLE WALL CONDUIT AT THE SOLE EXPENSE OF THE CONTRACTOR.
   - SINGLE WALL CONDUIT SHALL BE TYPE CP WITH CLASS II PERFORATION PATTERN.
   - DUAL WALL CONDUIT SHALL BE TYPE SP WITH A SMOOTH INTERIOR THAT CARRIES A MAXIMUM MANNING'S "N" VALUE OF 0.12 WITH CLASS II PERFORATION PATTERN.
2. ALL DRAIN TILE CONSTRUCTION MUST BE PROVIDED WITH TRACER WIRE OR OTHER APPROVED METHODS IN ORDER TO BE LOCATED IN ACCORD WITH 182.0715(2R) OF THE STATUTES. CONTRACTOR SHALL PROVIDE THE ENGINEER NOTICE OF LOCATION METHOD PRIOR TO THE START OF CONSTRUCTION.
3. A MAXIMUM TRENCH WIDTH OF 2-FT SHALL BE MAINTAINED FOR ALL DRAIN TILE INSTALLATION WITH THE EXCEPTION OF CONNECTION POINTS TO THE EXISTING STORM SEWER SYSTEM IN WHICH CASE THE CONTRACTOR SHALL LIMIT DISTURBANCE AS POSSIBLE.
4. THE MINIMUM DEPTH OF COVER (FINISH GRADE TO TOP PIPE) SHALL BE:
   - CONCRETE PAVED AREAS - 2.0-FT
   - ASPHALT PAVED AREAS - 2.5-FT
   - BEHIND CURB - 0.5-FT
   - OTHER LANDSCAPED/GRASS/PERVIOUS AREAS - 2.0-FT
5. CONNECTION TO THE EXISTING STORM SEWER SYSTEM SHALL ACHIEVED BY CORING THE EXISTING REINFORCED CONCRETE STORM SEWER STRUCTURES OR PIPING TO THE DIAMETER NECESSARY TO ACCOMMODATE A PERMANENT CONNECTION. ALL CONNECTIONS TO THE EXISTING REINFORCED CONCRETE STORM SEWER SHALL BE ACHIEVED BY THE USE OF KOR-N-SEAL CONNECTORS, OR EQUAL.
6. FOR TRENCH INSTALLATIONS OF CORRUGATED PLASTIC CONDUIT (OTHER THAN BEHIND CURB LOCATIONS), THE FOLLOWING BEDDING METHODS ARE REQUIRED:
   - A STONE BEDDING LAYER, AT LEAST 3 IN. THICK, USING A CLEAR STONE SHALL BE INSTALLED TO PROVIDE CONDUIT SUPPORT.
   - COMPACT BEDDING MATERIAL BESIDE AND TO THE UPPER (TOP) LIMITS OF BASE COURSE IN PAVED AREAS OR TOP OF CLAY (BOTTOM OF TOPSOIL LAYER) ABOVE THE CONDUIT.
7. ANY HARD OBJECTS LARGER THAN 1.5 IN. IN DIAMETER EXPOSED WITHIN THE TRENCH BOTTOM OR WALLS SHALL BE REMOVED TO PREVENT UNDUE STRESSES ON THE CONDUIT AND FITTINGS.
8. PRE MANUFACTURED FITTINGS (SUCH AS: WYES, TEES, BENDS, CAPS, ETC) OF THE SAME MATERIAL AS THE CONDUIT SHALL BE USED AT ALL CONNECTIONS AND DEFLECTIONS GREATER THAN 22.5 DEGREES.
9. IF NOT CONNECTED TO A STRUCTURE, THE UPPER END OF EACH SUBSURFACE DRAIN TILE SHALL BE CAPPED WITH A TIGHT-FITTING EXTERNAL CAP OF THE SAME MATERIAL AS THE CONDUIT.
10. AT ALL TIMES THE DRAIN TILE SYSTEM SHALL BE KEPT CLEAN AND PROTECTED AGAINST UNDERMINING OF THE CAPACITY OF THE CONDUIT AND DAMAGE DURING CONSTRUCTION. TYPICAL CAPACITY UNDERMINING INCLUDES ENTRY OF CONSTRUCTION MATERIALS, TRASH, AND RODENTS INTO THE CONDUIT.

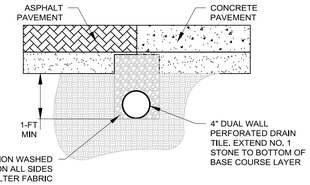

LOADING DOCK DRAINTILE

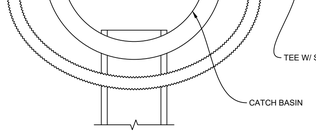

PLAN VIEW

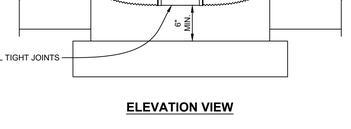

ELEVATION VIEW

NOTE: DRAIN TILE DONUT INSTALLATION IS REQUIRED FOR ALL PROPOSED STORM SEWER STRUCTURES.

DRAIN TILE DONUT

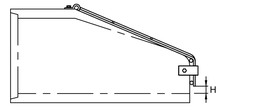

PLAN

ROUND		ARCH	
PIPE SIZE	H	PIPE SIZE	H
12"	2-1/2"	22"-29"	4"
15"	3"	36"-44"	5"
18"-24"	4"	51"-65"	6"
27"-36"	5"	73"-102"	7"
42"-54"	6"		
60"-72"	7"		
78"-90"	8"		

PROFILE



FRONT

NOTE:

1. REFER TO VILLAGE STANDARD SPECIFICATIONS FOR STORM SEWER.
2. SECURE THE LAST TWO PIPE SECTIONS, INCLUDING END SECTIONS, USING JOINT TIES.

	PIPE SIZE	BOLT DIA.	BAR DIA.
ROUND	12"-24"	5/8"	3/4"
	27"-48"	3/4"	1"
	54"-90"	1"	1-1/4"
ARCH	22"-29"	5/8"	3/4"
	36"-59"	3/4"	1"
	65"-88"	1"	1-1/4"
ELIPTICAL	14"-23"	5/8"	3/4"
	19"-30"	5/8"	3/4"
	24"-38"	3/4"	3/4"
	29"-45"	3/4"	3/4"
	34"-53"	3/4"	3/4"
	38"-60"	3/4"	3/4"
	43"-68"	1"	1"
	48"-76"	1"	1"
	53"-83"	1"	1"

SCALE: NTS

STANDARD ENDWALL GRATE

DETAIL: STM - 5	VILLAGE OF PLEASANT PRAIRIE
DATE: 12-17-18	KENOSHA COUNTY, WISCONSIN

NOTE:
1. REFER TO VILLAGE STANDARD SPECIFICATIONS FOR STORM SEWERS

RIPRAP	RIPRAP THICKNESS	GEOTEXTILE FABRIC TYPE
LIGHT	12"	R
MEDIUM	18"	HR
HEAVY	24"	HR
EXTRA HEAVY	30"	HR

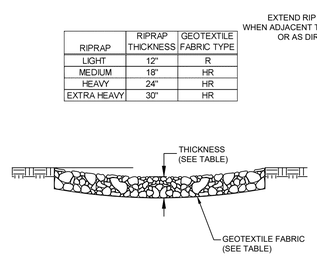

SECTION A-A

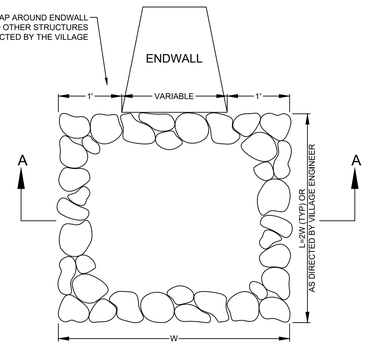

SCALE: NTS

RIPRAP TREATMENT AT ENDWALLS

DETAIL: STM - 6	VILLAGE OF PLEASANT PRAIRIE
DATE: 10-20-22	KENOSHA COUNTY, WISCONSIN

REVIEWED:
DESIGNED: AJS
DRAFTED: AJS

PINNACLE ENGINEERING GROUP
PLAN | DESIGN | DELIVER
www.pinnacle-engr.com
ENGINEERING | NATURAL RESOURCES | SURVEYING
WISCONSIN OFFICE: 20725 WATERTOWN ROAD, SUITE 100 BROOKFIELD, WI 53186 (262) 754-8888
CHICAGO | MILWAUKEE - NATIONWIDE

ZILBER INDUSTRIAL 3 @ LAKEVIEW CORPORATE PARK

108TH STREET & GREEN BAY ROAD (STH "31")
VILLAGE OF PLEASANT PRAIRIE, KENOSHA COUNTY

CONSTRUCTION DETAILS

REVISIONS

1	VOPP SITE PLAN SUBMITTAL	03/20/26	
2	VOPP RESUBMITTAL	05/11/26	
3	VOPP RESUBMITTAL	07/17/26	
4	VOPP RESUBMITTAL	10/02/26	

PEG JOB No. 644.00-WI
PEG PM AJS
START DATE 03/20/26
SCALE N.T.S.

SHEET C-19 C-22

©COPYRIGHT 2019

CONSTRUCTION DETAILS

Z:\PROJECTS\2016\644.00-WI\CAD\SHEETS\644.00-WI-SHEETS-CONSTRUCTION DETAILS.DWG

THESE PLANS AND DESIGNS ARE COPYRIGHT PROTECTED AND MAY NOT BE USED IN WHOLE OR IN PART WITHOUT THE WRITTEN CONSENT OF PINNACLE ENGINEERING GROUP, LLC

www.pinnacle-engr.com

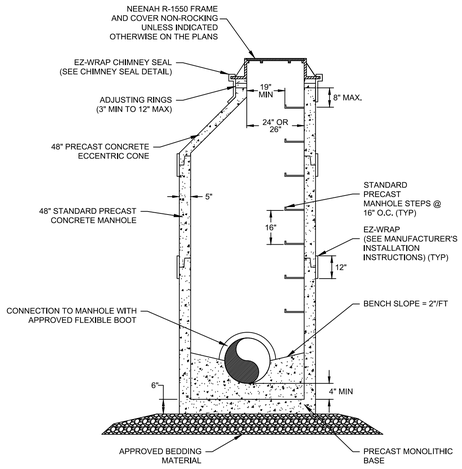

NOTE:
REFER TO VILLAGE STANDARD SPECIFICATIONS FOR SANITARY SEWER.

SCALE: NTS

STANDARD SANITARY MANHOLE	DETAIL: SAN - 1
DATE: 1-23-20	VILLAGE OF PLEASANT PRAIRIE
APPROVED BY: MATT FINEOUR	KENOSHA COUNTY, WISCONSIN

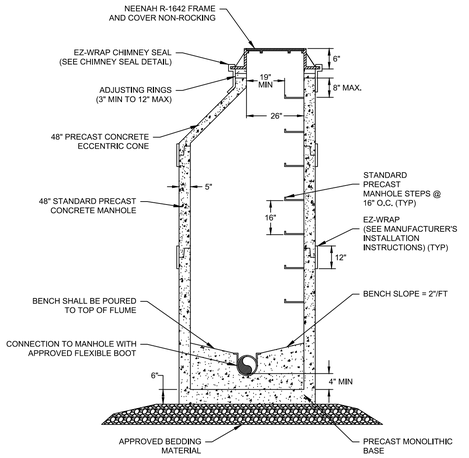

NOTES:
1. STANDARD SAMPLING MANHOLE SHALL HAVE A PALMER-BOWLUS FLUME WITH INTEGRAL APPROACH INSTALLED.
2. VILLAGE OF PLEASANT PRAIRIE DPW SHALL BE CONTACTED FOR FINAL INSPECTION OF SAMPLING MANHOLES.
3. SEE DETAIL SAN-2A AND SAN-2B FOR PALMER-BOWLUS FLUME DETAILS.
4. REFER TO VILLAGE STANDARD SPECIFICATIONS FOR SANITARY MANHOLES.

SCALE: NTS

STANDARD SAMPLING MANHOLE	
DETAIL: SAN - 2	VILLAGE OF PLEASANT PRAIRIE
DATE: 12-17-18	KENOSHA COUNTY, WISCONSIN

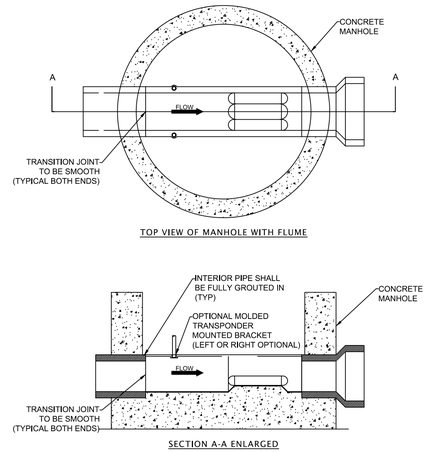

NOTE:
1. FLUME SHALL BE SET LEVEL INSIDE THE MANHOLE FOR PROPER TESTING PROCEDURES.
2. REFER TO VILLAGE STANDARD SPECIFICATIONS FOR SANITARY SEWER.

SCALE: NTS

PALMER-BOWLUS FLUME DETAIL (1 OF 2)	
DETAIL: SAN - 2A	VILLAGE OF PLEASANT PRAIRIE
DATE: 11-18-15	KENOSHA COUNTY, WISCONSIN

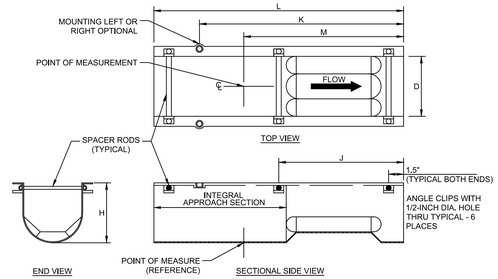

PIPE SIZE	D	H	M	K	J	L
4	4	6	11	15 7/16	6 1/2	17
6	6	8	16	20 7/16	12 1/2	25
8	8	10	21	25 7/16	16 1/2	33
10	10	12	26	30 7/16	20 1/2	41
12	12	14	31	35 7/16	24 1/2	49
15	15	17	38 1/2	42 15/16	30 1/2	61
18	18	20	46	50 7/16	36 1/2	73
21	21	23	53 1/2	57 15/16	42 1/2	85
24	24	26	61	65 7/16	48 1/2	97
27	27	29	68 1/2	72 15/16	54 1/2	109
30	30	32	76	80 7/16	60 1/2	121

NOTES:
1. DIMENSIONS ARE IN INCHES, UNLESS OTHERWISE SPECIFIED.
2. DIMENSIONS PROVIDED FOR REFERENCE ONLY.

SCALE: NTS

PALMER-BOWLUS FLUME DETAIL (2 OF 2)	
DETAIL: SAN - 2B	VILLAGE OF PLEASANT PRAIRIE
DATE: 11-16-15	KENOSHA COUNTY, WISCONSIN

NOTES:
1. ALL INACTIVE (DEAD) SEWER MAIN AND LATERALS, EXCEPT MAINS OR LATERALS TO POSSIBLE FUTURE DEVELOPMENT, SHALL BE ABANDONED.
2. PIPE CONNECTIONS MADE BY A RUBBER BOOT SHALL BE ABANDONED AT THE MANHOLE BY REMOVING THE EXISTING PIPE FROM THE BOOT AND REPLACING IT WITH A PVC PLUG. ABANDON ALL OTHER PIPES BY CUTTING THE PIPE AT THE MANHOLE AND SEALING THE PIPE END WITH A FERNCO FLEXIBLE COUPLING AND PVC PLUG.
3. ABANDON THE REMAINDER OF THE EXISTING PIPE WITHIN 5' OF THE BACK OF CURB OR EDGE OF SHOULDER BY FILLING WITH A FLOWABLE FILL AND INSTALLING A CAP OR PLUG. PROVIDE A WATERTIGHT PVC CAP ON PVC PIPE AND PLUG ALL OTHER PIPE WITH A FERNCO AND PVC PLUG. FLOWABLE FILL SHALL BE CONCRETE, SLURRY OR APPROVED EQUAL.

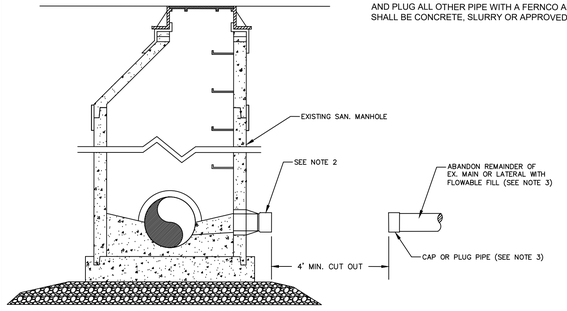

SCALE: NTS

SANITARY PIPE ABANDONMENT AT EXISTING MANHOLE	
DETAIL: SAN - 5	VILLAGE OF PLEASANT PRAIRIE
DATE: 4-22-20	KENOSHA COUNTY, WISCONSIN

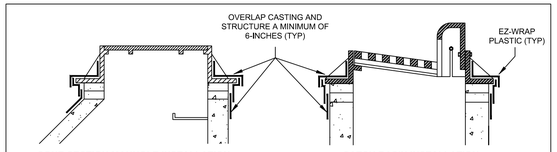

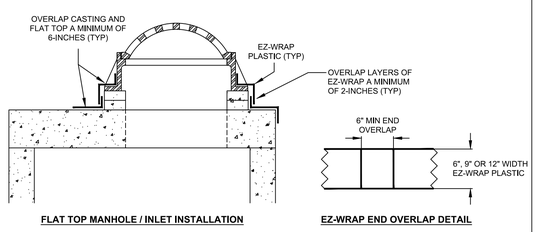

SCALE: NTS

INSTALLATION INSTRUCTIONS:
1. CLEAN AND DRY THE EXTERIOR SURFACES OF THE CASTING, ADJUSTING RINGS, AND STRUCTURE TO BE WRAPPED. SURFACES AND MATERIALS SHALL BE ABOVE 32 DEGREES.
2. APPLY MANUFACTURER RECOMMENDED AEROSOL ADHESIVE OR EZ-PRIMER #4 TO ALL SURFACES TO BE WRAPPED. EZ-PRIMER SHALL BE APPLIED USING A CLEAN PAINT BRUSH OR ROLLER.
3. WAIT FOR SOLVENTS TO DISPENSE FROM THE TREATED SURFACE. EZ-PRIMER TREATED SURFACE SHALL BE DRY AND APPEAR SMOOTH AND CLEAN. AEROSOL ADHESIVE SHALL BE TACKY, DEPENDING ON THE TEMPERATURE THIS MAY TAKE 10-30 MINUTES FOR EZ-PRIMER OR 1-3 MINUTES FOR AEROSOL ADHESIVE.
4. CUT EZ-WRAP TO LENGTH. CUT ENDS SHALL OVERLAP A MINIMUM OF 6".
5. BEGINNING AT THE BOTTOM OF THE STRUCTURE CAREFULLY INSTALL THE EZ-WRAP TO THE DRY, TREATED SURFACES, REMOVING THE RELEASE PAPER AS YOU APPLY THE EZ-WRAP, DO NOT STRETCH THE EZ-WRAP, PRESS THE EZ-WRAP DOWN FIRMLY AND EVENLY AS YOU COVER THE SURFACES.
6. INSTALL EZ-PRIMER OR AEROSOL ADHESIVE OVER TOP 2-INCHES OF EZ-WRAP AND CUT END TO BE OVERLAID, ALLOW SURFACE TO DRY AS STATED IN STEP 3.
7. INSTALL NEXT SECTION OF EZ-WRAP, OVERLAP THE EZ-WRAP VERTICALLY A MINIMUM OF 2-INCHES, DO NOT STRETCH THE EZ-WRAP, PRESS THE EZ-WRAP DOWN FIRMLY AND EVENLY AS YOU COVER THE SURFACES.
8. REPEAT STEPS 6 AND 7 UNTIL THE ENTIRE CHIMNEY SECTION IS WRAPPED.

CHIMNEY SEAL DETAIL	
DETAIL: CS - 1	VILLAGE OF PLEASANT PRAIRIE
DATE: 2-4-22	KENOSHA COUNTY, WISCONSIN

NOTES:
1. ALL INACTIVE (DEAD) SEWER MAINS AND LATERALS, EXCEPT MAINS OR LATERALS TO POSSIBLE FUTURE DEVELOPMENT, SHALL BE ABANDONED AS NOTED ON THE PLANS. PIPE ABANDONMENT FROM WITHIN THE MANHOLE SHALL BE PERFORMED AS DIRECTED BY THE VILLAGE ENGINEER.
2. WATERPROOF PLUGS SHALL BE EXPANDABLE WITH RUBBER OR NEOPRENE GASKET MATERIAL AND RATED FOR A MINIMUM OF 10-PSI OF BACK PRESSURE.
3. CONTRACTOR SHALL RESHAPE THE MANHOLE BENCH AND FLOWLINES TO ABANDON THE MANHOLE CONNECTION AS DIRECTED BY THE VILLAGE ENGINEER. USE MORTAR, CONCRETE, OR HYDRAULIC CEMENT IN ORDER TO RESHAPE THE MODIFIED FLOWLINES. FLOW SHALL BE BYPASS PUMPED OR THE FLOWLINE OTHERWISE PROTECTED TO PREVENT THE TRANSFER OF CEMENTITIOUS MATERIAL INTO THE DOWNSTREAM SEWERS UNTIL THE MATERIAL IS CURED.

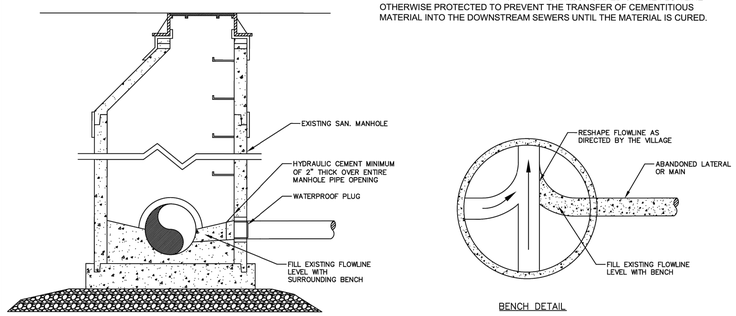

SCALE: NTS

SANITARY PIPE ABANDONMENT WITHIN EXISTING MANHOLE	
DETAIL: SAN - 5	VILLAGE OF PLEASANT PRAIRIE
DATE: 6-17-2026	KENOSHA COUNTY, WISCONSIN

REVIEWED:
DESIGNED: AJS
DRAFTED: AJS

PLAN | DESIGN | DELIVER
www.pinnacle-engr.com

PINNACLE ENGINEERING GROUP
ENGINEERING | NATURAL RESOURCES | SURVEYING

WISCONSIN OFFICE:
20725 WATERTOWN ROAD, SUITE 100
BROOKFIELD, WI 53186
(262) 754-8888
CHICAGO | MILWAUKEE | NATIONWIDE

ZILBER INDUSTRIAL 3 @ LAKEVIEW CORPORATE PARK

108TH STREET & GREEN BAY ROAD (STH "31")
VILLAGE OF PLEASANT PRAIRIE, KENOSHA COUNTY

CONSTRUCTION DETAILS

REVISIONS

1	VOPP SITE PLAN SUBMITTAL	03/20/26	
2	VOPP RESUBMITTAL	05/11/26	
3	VOPP RESUBMITTAL	07/17/26	
4	VOPP RESUBMITTAL	10/02/26	

PEG JOB No. 644.00-WI
PEG PM AJS
START DATE 03/20/26
SCALE N.T.S.

SHEET
C-20
C-22

©COPYRIGHT 2019

CONSTRUCTION DETAILS

Z:\PROJECTS\2016\644.00-WI\CAD\SHEETS\644.00-WI-SHEETS-CONSTRUCTION DETAILS.DWG

THESE PLANS AND DESIGNS ARE COPYRIGHT PROTECTED AND MAY NOT BE USED IN WHOLE OR IN PART WITHOUT THE WRITTEN CONSENT OF PINNACLE ENGINEERING GROUP, LLC

NOTES:
1. SYSTEM SIZING SHALL BE COMPLETED BY A FIRE SUPPRESSION ENGINEER AND APPROVED OF BY THE VILLAGE OF PLEASANT PRAIRIE FIRE DEPARTMENT.
2. SYSTEM INSTALLATION MUST BE CONSTRUCTED UNDER THE ONSITE SUPERVISION OF A LICENSED SPRINKLER FITTER.
3. WHEN POSSIBLE THE CHECK VALVE WITH BALL DRIP SHALL BE PLACED WITHIN THE BUILDING BASEMENT REMOVING THE NEED FOR THE MANHOLE STRUCTURE. THE BALL DRIP SHALL BE A MIN. 6' BELOW THE SURFACE ELEVATION OF THE PUMPER PAD IN EITHER LOCATION.

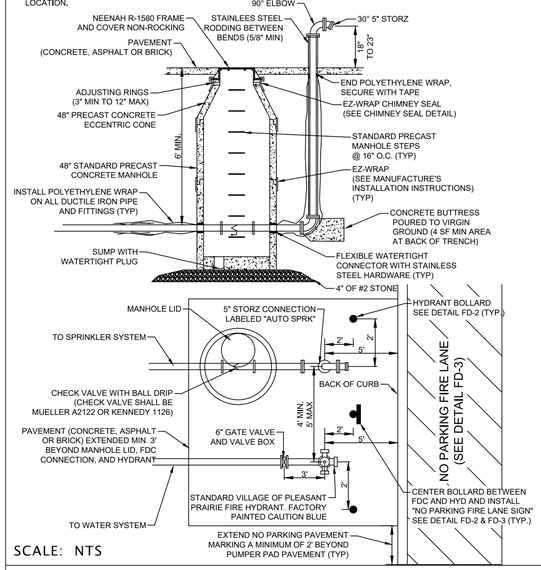

SCALE: NTS

PUMPER PAD FDC DETAIL

DETAIL: FD - 1	VILLAGE OF PLEASANT PRAIRIE
DATE: 9-10-20	KENOSHA COUNTY, WISCONSIN

NOTES:
1. SIGNS SHALL BE SPACED NOT GREATER THAN SIXTY (60) FEET APART. NO PART OF THE FIRE LANE SHALL BE FURTHER THAN 30 FEET FROM A SIGN.
2. SIGNS SHALL BE MOUNTED ON ROUND 2-3/8" DIAMETER GALVANIZED STEEL POSTS POWDER COATED BLACK, DARK BRONZE OR OTHER COLOR APPROVED BY THE VILLAGE COMMUNITY DEVELOPMENT DEPARTMENT.
3. THE MINIMUM HEIGHT, MEASURED VERTICALLY FROM THE TOP OF THE SIGN TO THE TOP OF THE CURB, OR IN THE ABSENCE OF CURB, MEASURED VERTICALLY FROM THE TOP OF THE SIGN TO THE ELEVATION OF THE NEAR EDGE OF THE TRAVELED WAY SHALL BE 6'-6".
4. WHERE A CURB IS PROVIDED, TOP AND FACE SHALL BE PAINTED YELLOW. PAVEMENT MARKING STRIPES SHALL BE YELLOW, FOUR INCHES (4") WIDE AND EXTENDING OUTWARD TO A WIDTH OF FOUR (4) FEET FROM CURB FACE WITH THREE (3) FEET BETWEEN EACH STRIPE.
5. YELLOW PAVEMENT MARKING LETTERS NOT LESS THAN FOUR (4) INCHES IN HEIGHT AND NOT LESS THAN TWO (2) INCHES IN WIDTH WITHIN THE STRIPING (BETWEEN THE POSTED SIGNS) TO READ "NO PARKING FIRE LANE".
6. SIGNS AND PAINTING ARE TO BE MAINTAINED BY THE PROPERTY OWNER.



SIGN ON HYDRANT BOLLARD



SIGN ON STANDARD POST

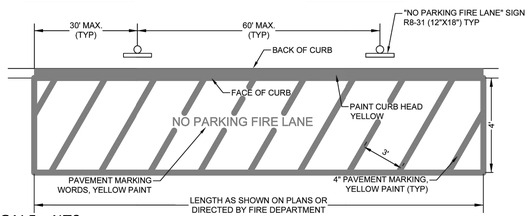

SCALE: NTS

FIRE LANE MARKING AND SIGNING

DETAIL: FD - 3	
DATE: 4-8-22	VILLAGE OF PLEASANT PRAIRIE
APPROVED BY: C. ROEPKE	KENOSHA COUNTY, WISCONSIN

NOTE:
1. VALVE SHALL BE WRAPPED IN BLACK POLYETHYLENE.
2. REFER TO VILLAGE STANDARD SPECIFICATION FOR WATER MAIN

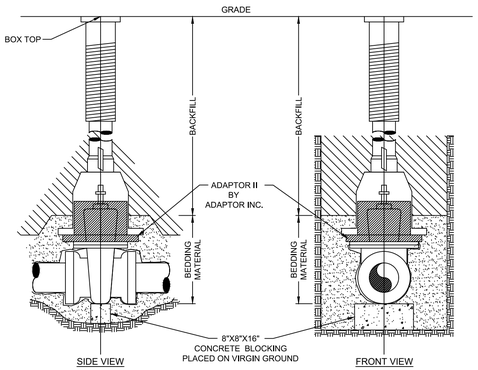

SCALE: NTS

STANDARD GATE VALVE BOX SETTING

DETAIL: W - 3	VILLAGE OF PLEASANT PRAIRIE
DATE: 11-16-15	KENOSHA COUNTY, WISCONSIN

NOTES:
1. L (WATER): DIMENSIONS IN THE TABLE ARE BASED ON A WATER PRESSURE OF 150 PSI, AN EARTH RESISTANCE OF 2 TONS PER SQ. FT., A FACTOR OF SAFETY OF 1.5 AND IS TO BE USED FOR STANDARD WATER MAINS AND WATER SERVICES.
2. L (FIRE): DIMENSIONS IN THE TABLE ARE BASED ON A WATER PRESSURE OF 200 PSI, AN EARTH RESISTANCE OF 2 TONS PER SQ. FT., A FACTOR OF SAFETY OF 1.5 AND IS TO BE USED FOR FIRE LINES AND COMBINATION FIRE / WATER SERVICES.
3. SHAPE OF BACK OF BUTTRESS MAY VARY AS LONG AS POUR IS AGAINST FIRM UNDISTURBED EARTH AND SURFACE AREA (H x L) MATCHES THAT LISTED IN THE TABLE. CONCRETE SHALL BEAR ON FITTINGS AS SHOWN.
4. DIMENSION "C" SHOULD BE LARGE ENOUGH TO MAKE ANGLE "D" EQUAL TO OR LARGER THAN 45 DEG.
5. DIMENSION "D" EQUALS APPROX. I.D. OF PIPE LESS 2". AN EFFORT SHOULD BE MADE TO PREVENT CONCRETE FROM COVERING THE MECHANICAL JOINT BOLTS.
6. WHERE BUTTRESSES ARE NOT POSSIBLE BECAUSE OF POOR SOIL CONDITIONS OR LACK OF ROOM, STRAPPING SHALL BE PERMITTED IF APPROVED BY THE VILLAGE.
7. IF IN-SITU SOILS HAVE AN EARTH RESISTANCE OF LESS THAN 2 TONS PER SQ. FT. THE BUTTRESS AREA SHALL BE INCREASED PROPORTIONALLY.
8. ALL DUCTILE IRON PIPE AND FITTINGS SHALL BE WRAPPED IN POLYETHYLENE.
9. REFER TO VILLAGE STANDARD SPECIFICATIONS FOR WATER MAIN.

PIPE	TEE		
SIZE	H	L (WATER)	L (FIRE)
4"	1'-6"	1'-0"	1'-0"
6"	1'-8"	1'-9"	1'-9"
8"	2'-4"	2'-0"	2'-1"
10"	2'-4"	2'-4"	3'-1"
12"	2'-7"	3'-0"	4'-0"
14"	2'-10"	3'-8"	4'-10"
16"	2'-10"	4'-9"	6'-4"
18"	3'-6"	4'-10"	6'-5"
20"	3'-10"	5'-5"	7'-2"
24"	4'-8"	6'-2"	8'-3"

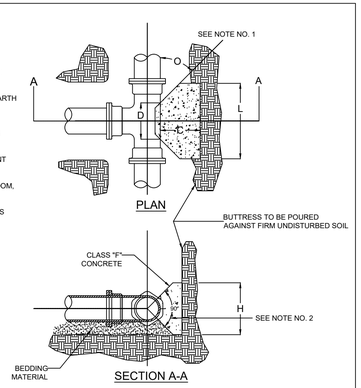

SCALE: NTS

BUTTRESS FOR TEES

DETAIL: W - 5A	VILLAGE OF PLEASANT PRAIRIE
DATE: 8-4-16	KENOSHA COUNTY, WISCONSIN

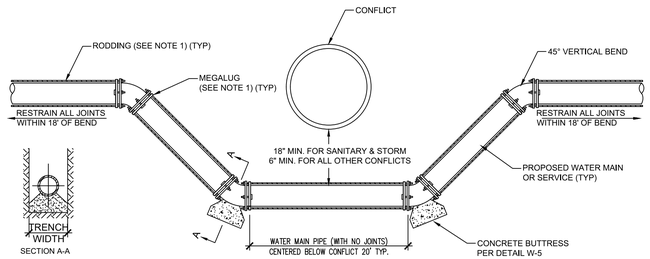

NOTES:
1. VILLAGE OF PLEASANT PRAIRIE PUBLIC WATER MAINS - ALL JOINTS SHALL BE RESTRAINED WITH MEGALUGS OR STAINLESS STEEL RODDING IN CONFORMANCE WITH FILE NO. 47 OF THE "STANDARD SPECIFICATIONS."
PRIVATE FIRE MAINS AND COMBINATION FIRE/WATER MAINS - ALL JOINTS SHALL BE RESTRAINED WITH MEGALUGS AND STAINLESS STEEL RODDING IN CONFORMANCE WITH SUBSECTION 10.6.2.1.2 OF THE NFPA 24 STANDARD FOR THE INSTALLATION OF PRIVATE SERVICE MAINS AND THEIR APPURTENANCES.
2. ALL FASTENERS SHALL BE STAINLESS STEEL.
3. WHEN NOTED ON THE PLANS OR DIRECTED BY THE VILLAGE, INSULATION SHALL BE INSTALLED BETWEEN THE WATER MAIN AND CONFLICT.
4. REFER TO VILLAGE STANDARD SPECIFICATIONS FOR WATER MAIN CONSTRUCTION

SCALE: NTS

WATER MAIN VERTICAL OFFSET

	DETAIL: W - 9
DATE: 5-24-21	VILLAGE OF PLEASANT PRAIRIE
APPROVED BY: MATT FINEOUR	KENOSHA COUNTY, WISCONSIN

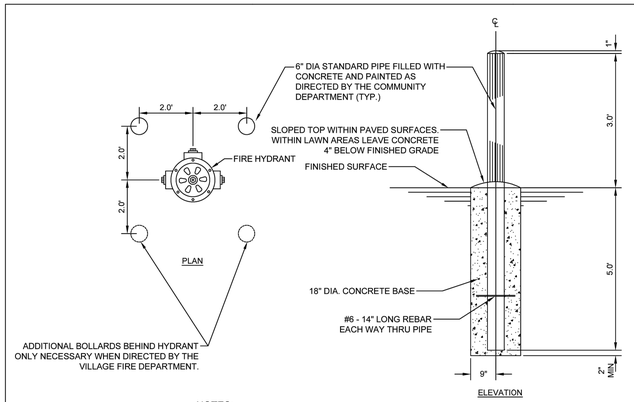

NOTES:
1. USE WITHIN DEVELOPMENTS WHERE HYDRANT MAY BE DAMAGED BY A VEHICLE, ADJACENT TO PARKING AREAS, OR AS DIRECTED BY FIRE DEPARTMENT.
2. HYDRANTS ALONG ROADWAYS, FIRE LANES AND DRIVE ISLES DO NOT TYPICALLY REQUIRE BOLLARDS.
3. HYDRANTS REQUIRING BOLLARDS SHALL BE NOTED AND THE BOLLARD LOCATIONS SHOWN ON PLANS.

SCALE: NTS

DEVELOPMENT HYDRANT BOLLARD

	DETAIL: FD - 2
DATE: 4-8-22	VILLAGE OF PLEASANT PRAIRIE
APPROVED BY: C. ROEPKE	KENOSHA COUNTY, WISCONSIN

REVIEWED:
DESIGNED: AJS
DRAFTED: AJS

PLAN | DESIGN | DELIVER
www.pinnacle-engr.com

PINNACLE ENGINEERING GROUP
ENGINEERING | NATURAL RESOURCES | SURVEYING

WISCONSIN OFFICE:
20725 WATERTOWN ROAD, SUITE 100
BROOKFIELD, WI 53186
(262) 754-8888
CHICAGO | MILWAUKEE | NATIONWIDE

ZILBER INDUSTRIAL 3 @ LAKEVIEW CORPORATE PARK

108TH STREET & GREEN BAY ROAD (STH "31")
VILLAGE OF PLEASANT PRAIRIE, KENOSHA COUNTY

CONSTRUCTION DETAILS

REVISIONS

1	VOPP SITE PLAN SUBMITTAL	03/20/26	
2	VOPP RESUBMITTAL	05/11/26	
3	VOPP RESUBMITTAL	07/17/26	
4	VOPP RESUBMITTAL	10/02/26	

PEG JOB No. 644.00-WI
PEG PM AJS
START DATE 03/20/26
SCALE N.T.S.

SHEET
C-21
C-22

©COPYRIGHT 2019

CONSTRUCTION DETAILS

www.pinnacle-engr.com

Z:\PROJECTS\2016\644.00-WI\CAD\SHEETS\644.00-WI-SHEETS-CONSTRUCTION DETAILS.DWG

THESE PLANS AND DESIGNS ARE COPYRIGHT PROTECTED AND MAY NOT BE USED IN WHOLE OR IN PART WITHOUT THE WRITTEN CONSENT OF PINNACLE ENGINEERING GROUP, LLC

www.pinnacle-engr.com

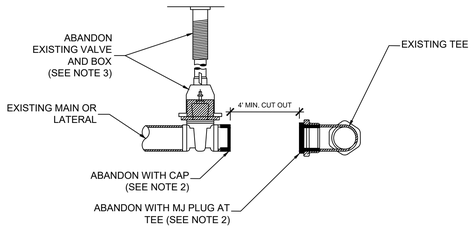

VALVE ABANDONMENT AND MAIN/SERVICE ABANDONMENT AT TEE

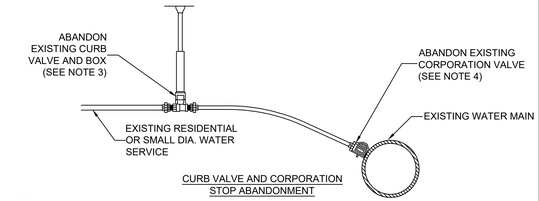

CURB VALVE AND CORPORATION STOP ABANDONMENT

NOTES:

1. ALL INACTIVE (DEAD) WATER MAINS AND LATERALS, EXCEPT MAINS OR LATERALS TO POSSIBLE FUTURE DEVELOPMENT, SHALL BE ABANDONED.
2. MAINS AND LATERALS CONNECTED TO EXISTING MAINS WITH A TEE SHALL BE ABANDONED AT THE TEE WHEN DIRECTED BY THE VILLAGE. ABANDONMENT AT THE MAIN LINE TEE SHALL BE COMPLETED BY REMOVING THE PIPE AND INSTALLING A PLUG ON THE TEE. THE REMAINING ABANDONED PIPE WITHIN 5' OF THE BACK OF CURB OR EDGE OF SHOULDER SHALL FILLED WITH A FLOWABLE FILL AND PLUGGED WITH A WATERPROOF PLUG OR CAP. FLOWABLE FILL SHALL BE CONCRETE, SLURRY OR APPROVED EQUAL. IF DETERMINED BY THE VILLAGE THAT THE EXISTING MAIN CANNOT BE SHUT DOWN FOR THE INSTALLATION OF THE PLUG ON THE TEE THEN ONLY THE SERVICE VALVE SHALL BE CLOSED.
3. ABANDONED VALVES SHALL BE LEFT IN PLACE UNLESS IT IS STATED ON THE PLANS TO REMOVE AND SALVAGE THE VALVE(S) FOR THE VILLAGE. VALVE BOXES SHALL BE ABANDONED BY REMOVING THE COVER AND TOP SECTION(S) TO A DEPTH OF 3 FEET BELOW THE FINAL GRADE. BACKFILL REMAINING VALVE BOX SECTIONS AND EXCAVATION WITH SLURRY WITHIN ROADWAYS OR GRANULAR MATERIAL ELSEWHERE.
4. SERVICE CONNECTIONS MADE TO MAIN WITH CORPORATION VALVES SHALL BE ABANDONED BY CLOSING THE CORPORATION VALVE AND PLUGGING THE SERVICE SIDE OF THE CORPORATION WITH A BRASS CAP.

ABANDONING VALVES AND WATER MAIN/SERVICE CONNECTIONS

DETAIL: W - 8	VILLAGE OF PLEASANT PRAIRIE
DATE: 4-22-20	KENOSHA COUNTY, WISCONSIN

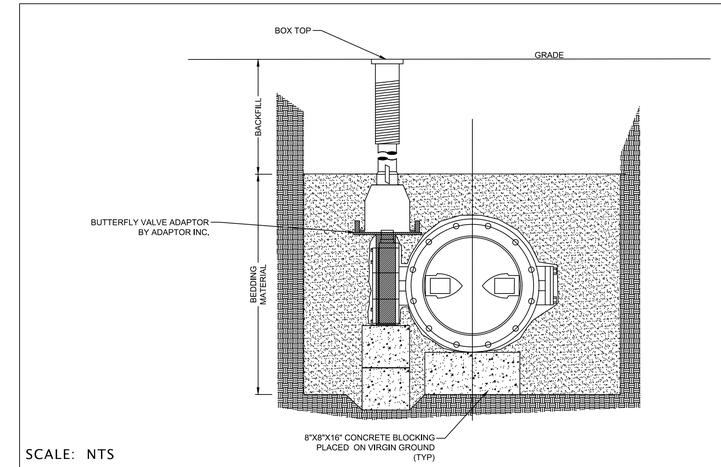

SCALE: NTS

STANDARD BUTTERFLY VALVE BOX SETTING

DETAIL: W - 4	VILLAGE OF PLEASANT PRAIRIE
DATE: 11-16-15	KENOSHA COUNTY, WISCONSIN

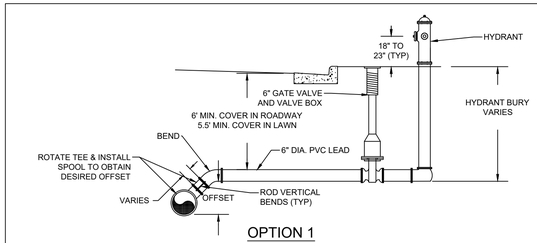

OPTION 1

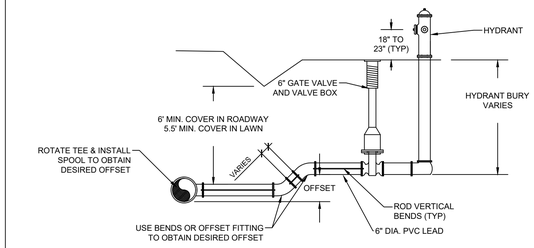

OPTION 2

NOTES:

1. HYDRANT ASSEMBLY INSTALLATION SHALL BE IN ACCORDANCE WITH THE STANDARD HYDRANT ASSEMBLY DETAIL.
2. REFER TO THE VILLAGE STANDARD SPECIFICATIONS FOR WATER MAIN CONSTRUCTION.
3. ALL VERTICAL BENDS SHALL BE RODDED WITH STAINLESS STEEL HARDWARE.

SCALE: NTS

HYDRANT OFFSETS	DETAIL: W - 6
DATE: 8-4-16	VILLAGE OF PLEASANT PRAIRIE
APPROVED BY: MATT FINEOUR	KENOSHA COUNTY, WISCONSIN

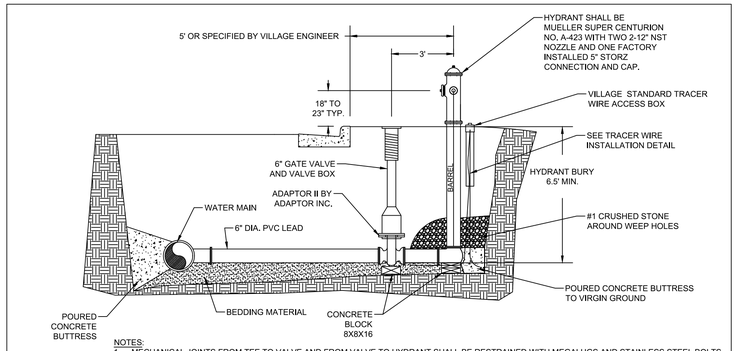

NOTES:

1. MECHANICAL JOINTS FROM TEE TO VALVE AND FROM VALVE TO HYDRANT SHALL BE RESTRAINED WITH MEGALUGS AND STAINLESS STEEL BOLTS.
2. ALL FASTENERS SHALL BE STAINLESS STEEL.
3. HYDRANT EXTENSIONS ARE NOT PERMITTED
4. ALL HYDRANTS, EXCLUDING STORZ CONNECTION, SHALL BE FACTORY PAINTED WITH EPOXY AS IDENTIFIED BELOW:
   A. PUBLIC (VILLAGE) HYDRANTS SHALL BE MUELLER RED - SHERWIN WILLIAMS POLANE F63RL15
   B. PRIVATE HYDRANTS ON VILLAGE SYSTEM PRESSURE SHALL BE CAUTION BLUE - SHERWIN WILLIAMS POLANE F63RXL9667
   C. PRIVATE PRESSURED HYDRANTS ON FIRE LOOPS SHALL BE MUELLER YELLOW - SHERWIN WILLIAMS POLANE F63YL14
5. REFER TO VILLAGE STANDARD SPECIFICATIONS FOR WATER MAIN CONSTRUCTION

SCALE: NTS

STANDARD HYDRANT ASSEMBLY

DETAIL: W - 1	VILLAGE OF PLEASANT PRAIRIE
DATE: 8-19-19	KENOSHA COUNTY, WISCONSIN

SCALE: NTS

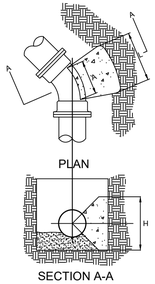

NOTES:

1. $L_{(WATER)}$ DIMENSIONS IN THE TABLE ARE BASED ON A WATER PRESSURE OF 150 PSI, AN EARTH RESISTANCE OF 2 TONS PER SQ. FT., A FACTOR OF SAFETY OF 1.5 AND IS TO BE USED FOR STANDARD WATER MAINS AND WATER SERVICES.
2. $L_{(FIRE)}$ DIMENSIONS IN THE TABLE ARE BASED ON A WATER PRESSURE OF 200 PSI, AN EARTH RESISTANCE OF 2 TONS PER SQ. FT., A FACTOR OF SAFETY OF 1.5 AND IS TO BE USED FOR FIRE LINES AND COMBINATION FIRE / WATER SERVICES.
3. DIMENSION (A) SHOULD BE AS LARGE AS POSSIBLE WITHOUT INTERFERING WITH MECHANICAL JOINT BOLTS.
4. SHAPE OF BACK OF BUTTRESS MAY VARY AS LONG AS POUR IS AGAINST FIRM UNDISTURBED EARTH AND SURFACE AREA (H x L) MATCHES THAT LISTED IN THE TABLE.
5. IF IN-SITU SOILS HAVE AN EARTH RESISTANCE OF LESS THAN 2 TONS PER SQ. FT. THE BUTTRESS AREA SHALL BE INCREASED PROPORTIONALLY.
6. ALL DUCTILE IRON PIPE AND FITTINGS SHALL BE WRAPPED IN POLYETHYLENE.
7. REFER TO VILLAGE STANDARD SPECIFICATIONS FOR WATER MAIN.

BUTTRESS DIMENSIONS

PIPE	11¼ DEG. BEND			22½ DEG. BEND			45 DEG. BEND			90 DEG. BEND		
SIZE	H	$L_{(WATER)}$	$L_{(FIRE)}$	H	$L_{(WATER)}$	$L_{(FIRE)}$	H	$L_{(WATER)}$	$L_{(FIRE)}$	H	$L_{(WATER)}$	$L_{(FIRE)}$
4"	0'-8"	0'-5"	0'-5"	1'-1"	0'-6"	0'-6"	1'-3"	0'-10"	0'-10"	1'-4"	1'-6"	1'-6"
6"	1'-2"	0'-6"	0'-6"	1'-6"	0'-9"	0'-9"	1'-8"	1'-4"	1'-4"	1'-10"	2'-2"	2'-2"
8"	1'-3"	0'-9"	0'-9"	2'-0"	1'-0"	1'-0"	2'-0"	1'-11"	1'-11"	2'-4"	3'-0"	3'-0"
10"	1'-3"	0'-10"	1'-2"	2'-0"	1'-1"	1'-5"	2'-0"	2'-1"	2'-9"	2'-4"	3'-4"	4'-5"
12"	1'-4"	1'-2"	1'-6"	2'-6"	1'-2"	1'-7"	2'-6"	2'-4"	3'-2"	2'-8"	4'-1"	5'-5"
14"	1'-6"	1'-4"	1'-10"	3'-0"	1'-4"	1'-10"	3'-0"	2'-8"	3'-6"	3'-0"	4'-11"	6'-6"
16"	2'-0"	1'-4"	1'-9"	3'-0"	1'-5"	2'-4"	3'-0"	3'-5"	4'-7"	3'-0"	6'-4"	8'-5"
18"	2'-6"	1'-4"	1'-9"	3'-6"	1'-10"	2'-6"	3'-6"	3'-8"	4'-11"	3'-6"	6'-9"	9'-1"
20"	2'-9"	1'-6"	2'-0"	3'-9"	2'-2"	2'-10"	3'-9"	4'-2"	5'-7"	3'-9"	7'-9"	10'-4"
24"	3'-0"	1'-11"	2'-7"	4'-3"	2'-8"	3'-7"	4'-3"	5'-4"	7'-1"	4'-4"	9'-7"	12'-10"

BUTTRESS FOR BENDS

DETAIL: W - 5	
DATE: 8-4-16	VILLAGE OF PLEASANT PRAIRIE
APPROVED BY: MATT FINEOUR	KENOSHA COUNTY, WISCONSIN

JOINT RESTRAINT DISTANCE (FT) PER FITTING

FITTING TYPE	4"	6"	8"	12"	16"	20"
HORIZONTAL BEND-11.25°(L)	5'	5'	5'	5'	8'	8'
HORIZONTAL BEND-22.5°(L)	8'	8'	8'	10'	10'	15'
HORIZONTAL BEND-45°(L)	10'	10'	12'	16'	20'	26'
HORIZONTAL BEND-90°(L)	16'	20'	25'	32'	40'	52'
VERTICAL BEND-11.25°-UPPER (L)	6'	6'	8'	10'	12'	14'
VERTICAL BEND-11.25°-LOWER (L)	4'	4'	4'	4'	4'	6'
VERTICAL BEND-22.5°-UPPER (L)	8'	10'	14'	18'	24'	28'
VERTICAL BEND-22.5°-LOWER (L)	4'	5'	5'	8'	8'	8'
VERTICAL BEND-45°-UPPER (L)	12'	20'	26'	40'	50'	60'
VERTICAL BEND-45°-LOWER (L)	5'	5'	6'	10'	12'	14'
*RESTRAIN LARGER SIZED PIPE						
REDUCER-DIA 4"(L)	-	25'*	50'*	60'*	80'*	130'*
REDUCER-DIA 6"(L)	-	-	25'*	60'*	100'*	125'*
REDUCER-DIA 8"(L)	-	-	-	50'*	80'*	120'*
REDUCER-DIA 12"(L)	-	-	-	-	50'*	100'*
REDUCER-DIA 16"(L)	-	-	-	-	-	50'*
DEAD END(L)	40'	40'	60'	90'	120'	150'
TEE OR CROSS-RUN (Lr)	10'	10'	10'	20'	30'	40'
TEE-4"BRANCH(b)	8'	6'	6'	6'	6'	6'
TEE-6"BRANCH(b)	-	8'	6'	6'	6'	6'
TEE-8"BRANCH(b)	-	-	10'	6'	6'	6'
TEE-12"BRANCH(b)	-	-	-	12'	6'	6'
TEE-16"BRANCH(b)	-	-	-	-	30'	10'
TEE-20"BRANCH(b)	-	-	-	-	-	50'

*OTHERWISE RESTRAINED SLEEVE FITTINGS ARE NOT ALLOWED WITHIN THE ABOVE DISTANCES
NOTE:ALL LENGTHS REFER TO L, Lr, OR b IN DETAIL

STANDARD SPECIFICATIONS FOR SEWER AND WATER CONSTRUCTION IN WISCONSIN

FILE NO. 47A

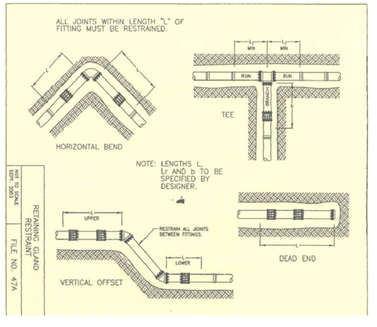

JOINT RESTRAINT DISTANCE PER FITTING

REVISED: 7/2021

REVIEWED:
DESIGNED: AJS
DRAFTED: AJS

PLAN | DESIGN | DELIVER
www.pinnacle-engr.com

PINNACLE ENGINEERING GROUP
ENGINEERING | NATURAL RESOURCES | SURVEYING

WISCONSIN OFFICE:
20725 WATERTOWN ROAD, SUITE 100
BROOKFIELD, WI 53186
(262) 754-8888
CHICAGO | MILWAUKEE : NATIONWIDE

ZILBER INDUSTRIAL 3 @ LAKEVIEW CORPORATE PARK

108TH STREET & GREEN BAY ROAD (STH "31")
VILLAGE OF PLEASANT PRAIRIE, KENOSHA COUNTY

CONSTRUCTION DETAILS

REVISIONS

1	VOPP SITE PLAN SUBMITTAL	03/20/26			
2	VOPP RESUBMITTAL	05/11/26			
3	VOPP RESUBMITTAL	07/17/26			
4	VOPP RESUBMITTAL	10/02/26			

PEG JOB No. 644.00-WI
PEG PM AJS
START DATE 03/20/26
SCALE N.T.S.

SHEET
C-22
C-22

© COPYRIGHT 2019

CONSTRUCTION DETAILS

Z:\PROJECTS\2016\644.00-WI\CAD\SHEETS\644.00-WI-SHEETS-CONSTRUCTION DETAILS.DWG

THESE PLANS AND DESIGNS ARE COPYRIGHT PROTECTED AND MAY NOT BE USED IN WHOLE OR IN PART WITHOUT THE WRITTEN CONSENT OF PINNACLE ENGINEERING GROUP, LLC

NOTES

1. REFER TO VILLAGE STANDARD SPECIFICATIONS FOR TRACER WIRE.

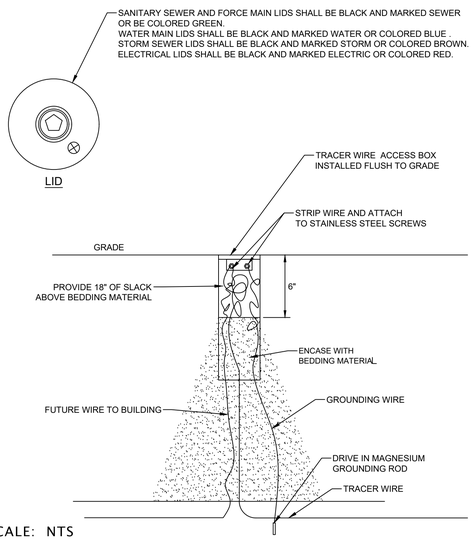

SCALE: NTS

TRACER WIRE ACCESS BOX

DETAIL: TW - 1	VILLAGE OF PLEASANT PRAIRIE
DATE: 2-4-2025	KENOSHA COUNTY, WISCONSIN

SCALE: NTS

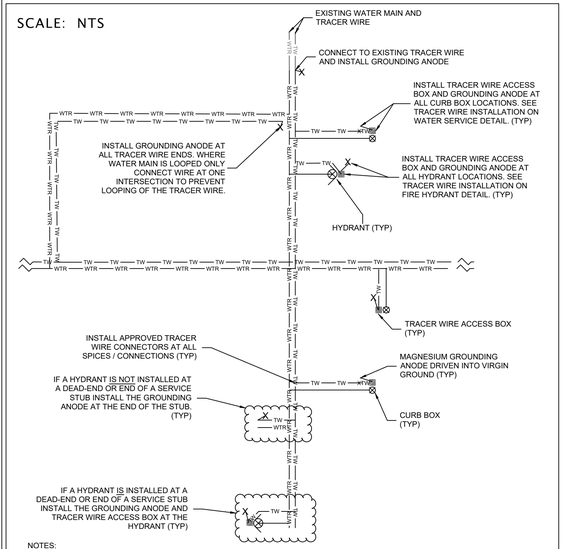

NOTES:

1. REFER TO SPECIFICATIONS FOR TRACER WIRE.
2. CONNECT TO EXISTING TRACER WIRE AT ONLY ONE LOCATION UNLESS OTHERWISE DIRECTED BY THE VILLAGE.
3. TRACER WIRE SHALL BE TAPED TO MAIN AND SERVICES. WIRE IS SHOWN OFF PIPES FOR CLARITY.
4. TAKE CARE TO PREVENT LOOPS IN TRACER WIRE. LOOPING OF WIRE CAN MAKE THE WIRE DIFFICULT TO TRACE.

TRACER WIRE INSTALLATION ON WATER MAIN

DETAIL: TW - 3	VILLAGE OF PLEASANT PRAIRIE
DATE: 12-17-18	KENOSHA COUNTY, WISCONSIN

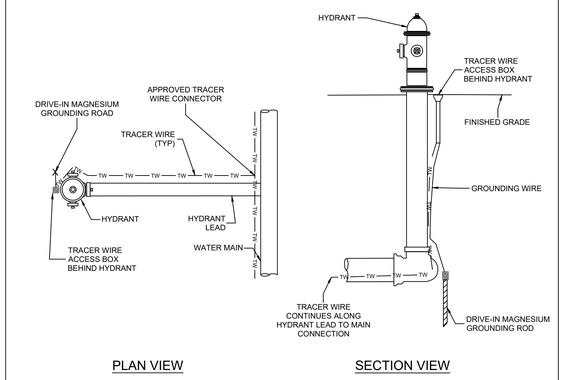

NOTES:

1. REFER TO SPECIFICATIONS FOR TRACER WIRE.
2. TRACER WIRE SHALL BE TAPED TO MAIN, LEAD AND HYDRANT. WIRE IS SHOWN OFF PIPES FOR CLARITY.
3. INSTALL GROUNDING ANODE BY DRIVING INTO VIRGIN GROUND AT THE HYDRANT SHOE.
4. TRACER WIRE ACCESS BOX SHALL BE INSTALLED DIRECTLY BEHIND ALL FIRE HYDRANTS.

SCALE: NTS

TRACER WIRE INSTALLATION ON FIRE HYDRANT

DETAIL: TW - 4	VILLAGE OF PLEASANT PRAIRIE
DATE: 12-17-18	KENOSHA COUNTY, WISCONSIN

NOTES:

1. SIGN PLATE MATERIAL SHALL BE ALUMINUM AND FURNISHED WITH REFLECTIVE SHEETING.
2. ALL HARDWARE FOR ALL SIGN INSTALLATION SHALL BE MOUNTED TO THE SUPPORT IN A MANNER TO PREVENT ROTATION OF THE SIGN. BACKBRACES SHALL BE MOUNTED TO THE SIGN TO PROVIDE ADEQUATE SUPPORT AT THE TOP AND BOTTOM OF THE SIGN TO PREVENT BENDING. ALL HARDWARE FOR SIGNS SHALL BE MOUNTED TO THE SIGN BY USE OF STAINLESS STEEL BOLTS.
3. POSTS SHALL BE PLUMB.
4. SIGN PLATES SHALL CONFORM TO THE FOLLOWING EXCEPT WHERE NOTED ON THE PLANS.
   - 4.A. ADA-ACCESSIBLE PARKING SIGN (WISDOT R7-8A) - 12"X18"
   - 4.B. ADA-VAN SIGN (WISDOT R7-8V) - 12"X6" PLACED BELOW R7-81. SIGN SHALL BE INSTALLED ON ALL ADA STALLS ADJACENT TO ACCESS ISLES 8' WIDE AND GREATER.
   - 4.C. NO PARKING FIRE LANE (MUTCD R8-31) - 12"X18"
   - 4.D. STOP (WISDOT R1-1) - 24"X24" EXCEPT 30"X30" AT PUBLIC ROADWAY CONNECTIONS
5. BOLLARDS OR SIGNS WITHIN SIDEWALK REQUIRE A MINIMUM OF 4-FOOT CLEARANCE FROM BACK OF SIDEWALK TO EDGE OF BOLLARD/SIGN.

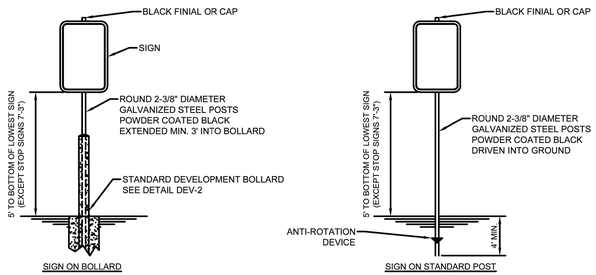

SCALE: NTS

STANDARD ON-SITE DEVELOPMENT SIGNS

DETAIL: DEV - 1	VILLAGE OF PLEASANT PRAIRIE
DATE: 6-10-26	KENOSHA COUNTY, WISCONSIN

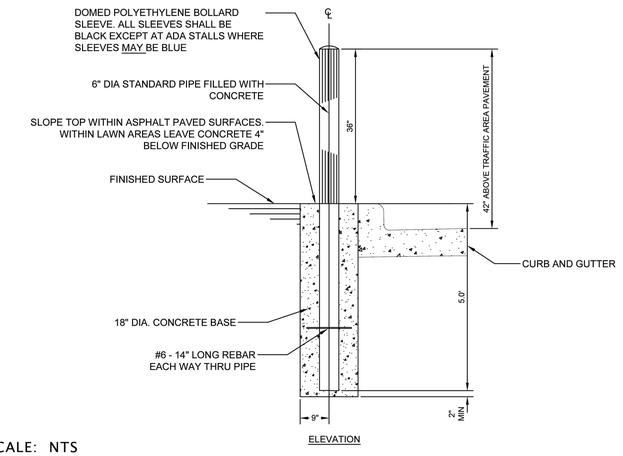

SCALE: NTS

DEVELOPMENT BOLLARD

DETAIL: DEV - 2	VILLAGE OF PLEASANT PRAIRIE
DATE: 6-10-26	KENOSHA COUNTY, WISCONSIN

REVIEWED:
DESIGNED: AJS
DRAFTED: AJS

PLAN | DESIGN | DELIVER
www.pinnacle-engr.com

PINNACLE ENGINEERING GROUP
ENGINEERING | NATURAL RESOURCES | SURVEYING

WISCONSIN OFFICE:
20725 WATERTOWN ROAD, SUITE 100
BROOKFIELD, WI 53186
(262) 754-8888
CHICAGO | MILWAUKEE - NATIONWIDE

ZILBER INDUSTRIAL 3 @ LAKEVIEW CORPORATE PARK

108TH STREET & GREEN BAY ROAD (STH "31")
VILLAGE OF PLEASANT PRAIRIE, KENOSHA COUNTY

CONSTRUCTION DETAILS

REVISIONS

1	VOPP SITE PLAN SUBMITTAL	03/20/26	
2	VOPP RESUBMITTAL	05/11/26	
3	VOPP RESUBMITTAL	07/17/26	
4	VOPP RESUBMITTAL	10/02/26	

PEG JOB No. 644.00-WI
PEG PM AJS
START DATE 03/20/26
SCALE N.T.S.

SHEET
C-23
C-22

© COPYRIGHT 2019

CONSTRUCTION DETAILS

www.pinnacle-engr.com

Z:\PROJECTS\2016\644.00-WI\CAD\SHEETS\644.00-WI-SHEETS-CONSTRUCTION DETAILS.DWG