THESE PLANS AND DESIGNS ARE COPYRIGHT PROTECTED AND MAY NOT BE USED IN WHOLE OR IN PART WITHOUT THE WRITTEN CONSENT OF PINNACLE ENGINEERING GROUP, LLC

PLANT KEY


CODE	BOTANICAL / COMMON NAME	SIZE
TREES		
ANO	Acer rubrum 'Northwood' Northwood Maple	2" Cal.
CCH	Celtis occidentalis 'Chicagoland' Chicagoland Hackberry	2" Cal.
GTIS	Gleditsia triacanthos inermis 'Sunburst' Sunburst Common Honeylocust	2" Cal.
GHK	Gymnocladus dioica 'McKBranched' Decaf Kentucky Coffee Tree	2" Cal.
TRL	Tilia americana 'Redmond' Redmond American Linden	2" Cal.
EVERGREEN TREES		
PAN	Picea abies Norway Spruce	6` Ht.
PGD	Picea glauca 'Densata' Black Hills Spruce	6` Ht.
ORNAMENTAL TREES		
CFK	Carpinus caroliniana 'JN Strain' Fire King Musclewood	1.5" Cal.
SHRUBS		
DPX	Diervilla x 'G2X885411' Kodiak Red Diervilla	24" Ht.
HL	Hamamelis x intermedia 'Livia' Livia Witch Hazel	24" Ht.
PDN	Physocarpus opulifolius `Nanus` Dwarf Ninebark	18" Ht.
SBE	Sambucus nigra `Black Lace` Black Lace Elderberry	24" Ht.
SLL	Sambucus racemosa `Lemony Lace` Lemony Lace Elderberry	24" Ht.
EVERGREEN SHRUBS		
JT	Juniperus chinensis 'Trautman' Trautman Juniper	4` Ht.
JB2	Juniperus horizontalis 'Blue Forest' Blue Forest Creeping Juniper	24" W
PB3	Pinus strobus 'Blue Shag' Blue Shag White Pine	24" Ht.
TG	Taxus x media 'SMNTHDB' Stonehenge Dark Druid® Yew	24" Ht.
TC	Taxus x media 'SMNTHDC' Stonehenge® Anglo-Japanese Yew	24" Ht.
TFC	Thuja occidentalis 'Congabe' Fire Chief Arborvitae	24" Ht.
ORNAMENTAL GRASSES		
CK	Calamagrostis x acutiflora `Karl Foerster` Feather Reed Grass	1 gal.
CO2	Calamagrostis x acutiflora 'Overdam' Overdam Feather Reed Grass	1 gal.
DP	Deschampsia cespitosa 'Pixie Fountain' Pixie Fountain Tufted Hair Grass	1 gal.
DS2	Deschampsia cespitosa 'Schottland' Schottland Tufted Hair Grass	1 gal.
HA2	Hakonechloa macra 'All Gold' All Gold Japanese Forest Grass	1 gal.
PB2	Pennisetum alopecuroides 'Little Bunny' Little Bunny Fountain Grass	1 gal.

CODE	BOTANICAL / COMMON NAME	SIZE
PERENNIALS		
AC	Astilbe x 'Chocolate Cherry' Mighty® Chocolate Cherry Astilbe	1 gal.
BL	Brunnera macrophylla 'Looking Glass' Looking Glass Siberian Bugloss	1 gal.
CC4	Coreopsis grandiflora 'Sunburst' Sunburst Tickseed	1 gal.
DW	Dianthus gratianopolitanus 'Firewitch' Firewitch Cheddar Pink	1 gal.
EL	Eupatorium dubium `Little Joe` Joe-Pye Weed	1 gal.
HT	Helenium autumnale `Short `n Sassy` Short `n Sassy Sneezeweed	1 gal.
HB	Heuchera x 'Berry Smoothie' Berry Smoothie Coral Bells	1 gal.
HE2	Hosta x `Empress Wu` Empress Wu Plantain Lily	1 gal.
HY	Hosta x 'Diana Remembered' Diana Remembered Hosta	1 gal.
HR8	Hosta x 'Rainforest Sunrise' Rainforest Sunrise Hosta	1 gal.
PT3	Pulmonaria x `Trevi Fountain` Lungwort	1 gal.
SR	Solidago rugosa 'Fireworks' Fireworks Wrinkleleaf Goldenrod	1 gal.
HS2	x Heucherella x `Sweet Tea` Sweet Tea Foamy Bells	1 gal.

SYMBOL	BOTANICAL / COMMON NAME
AGRECOL MIXES	
	AGRECOL RAINWATER RENEWAL AGRECOL RAINWATER RENEWAL SEED MIX
TURF	
	Turf Drought Tolerant Fescue Blend

NOTES

- EXISTING STREET TREES -
  - CURRENT IMAGERY SUGGESTS THAT STREET TREES MAY HAVE BEEN REPLACED SINCE COMMENTS WERE RECEIVED.
  - SPECIES & TREE CONDITION WILL BE REEVALUATED WHEN IDEAL IDENTIFICATION CONDITIONS EXIST (IE. LEAF OUT OCCURS).

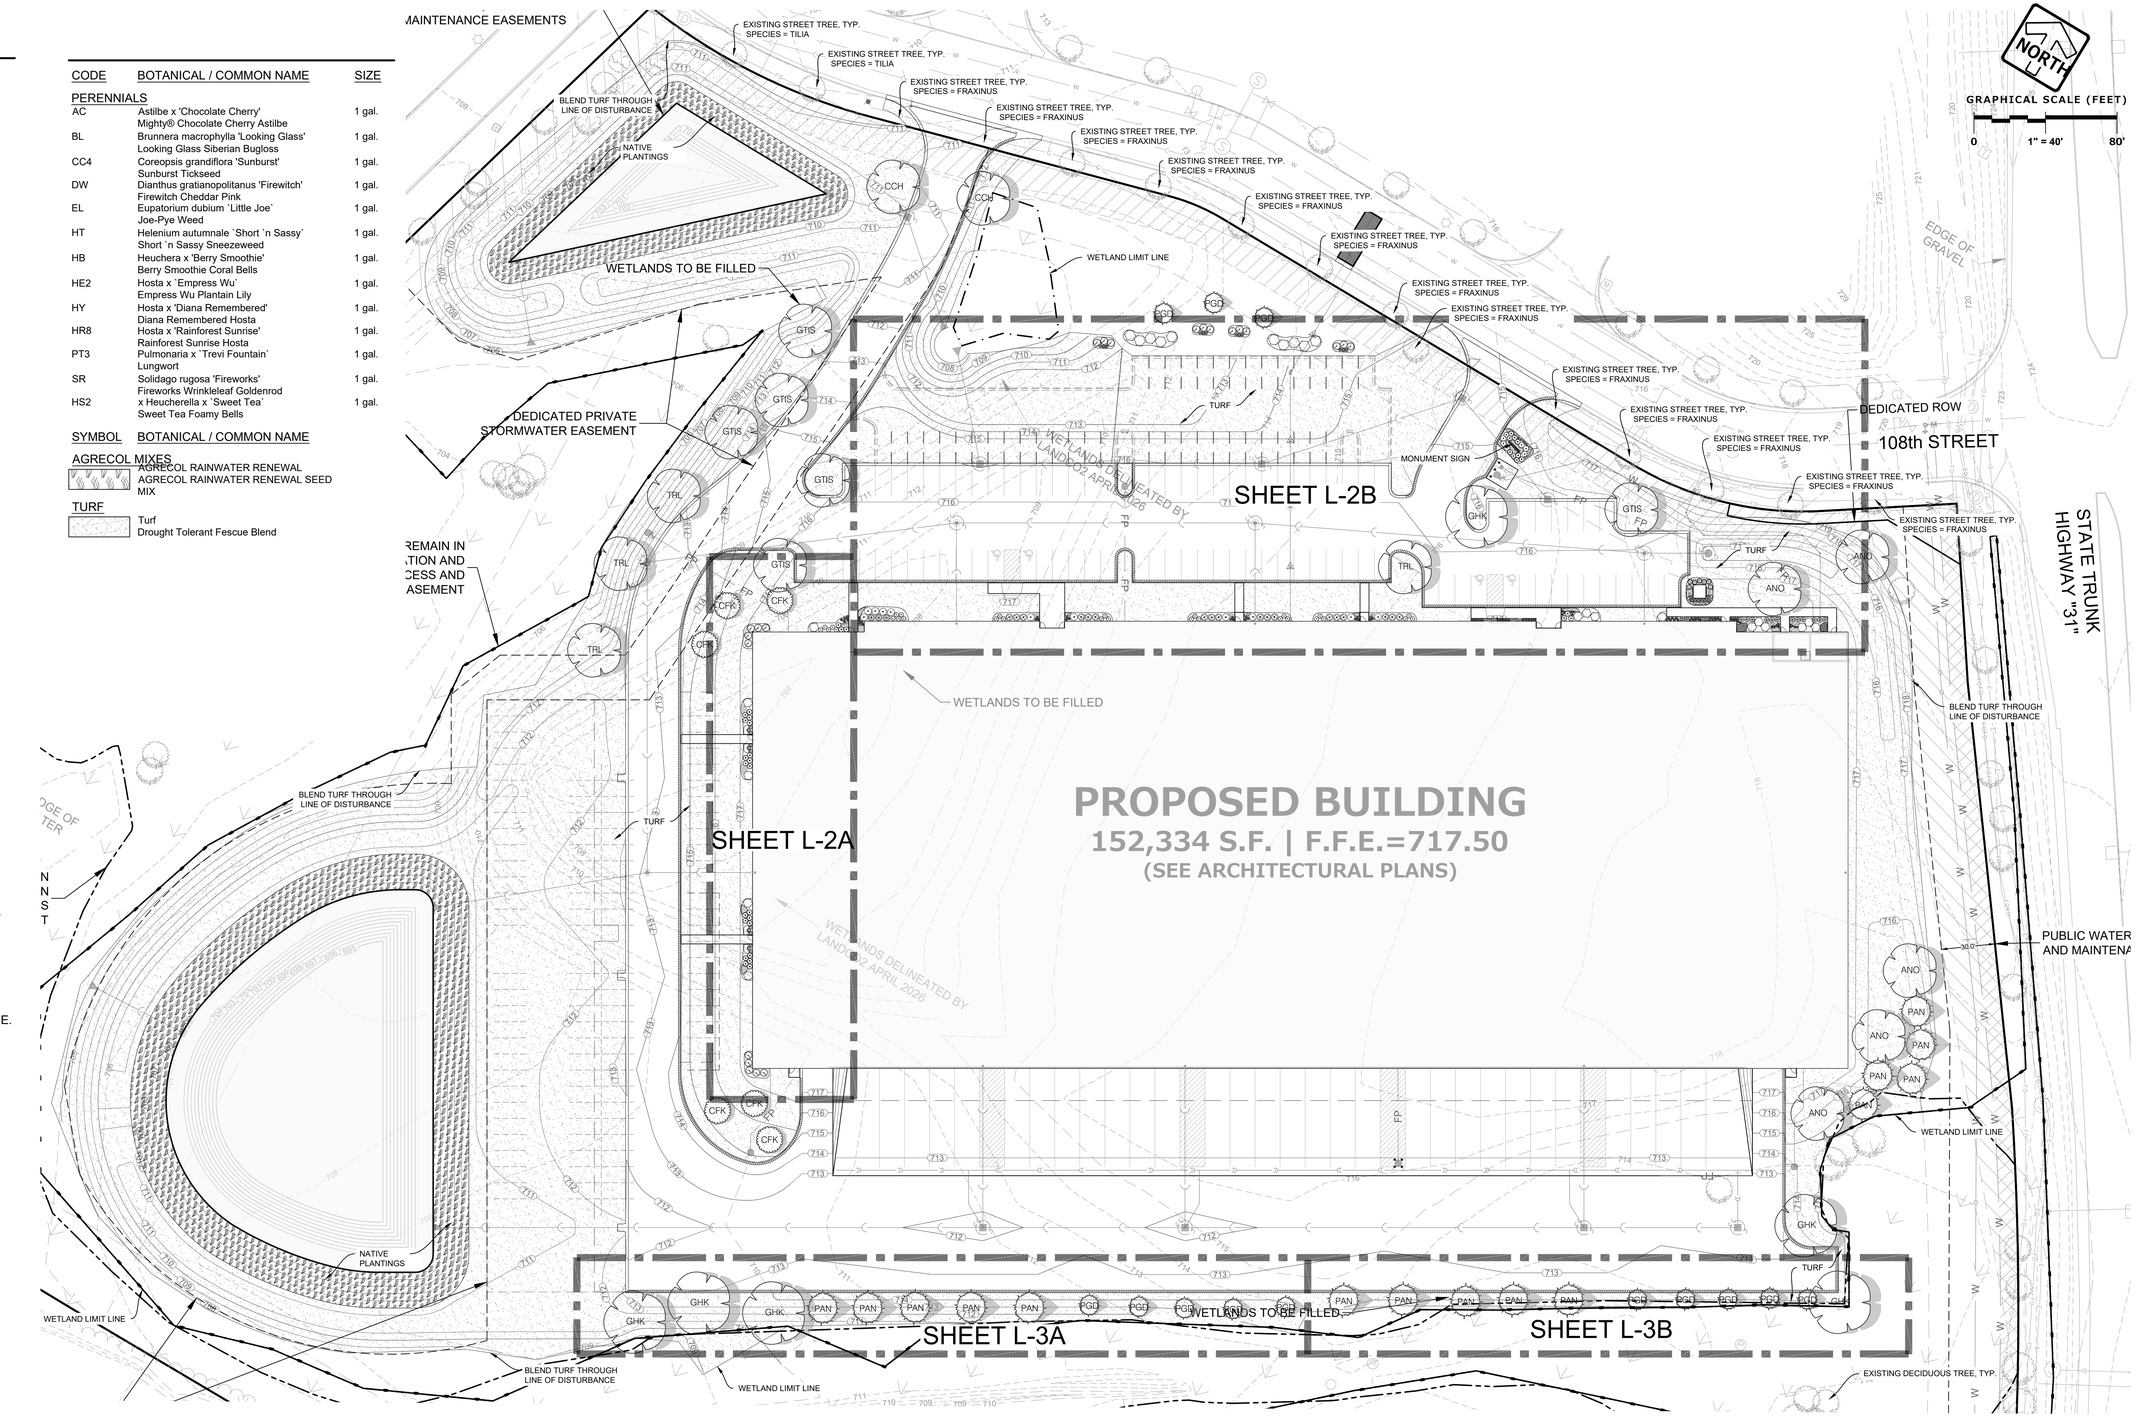

www.pinnacle-engr.com

REVIEWED: DJB
DESIGNED: SAT
DRAFTED: SAT

PLAN I DESIGN I DELIVER
www.pinnacle-engr.com

PINNACLE ENGINEERING GROUP
ENGINEERING I NATURAL RESOURCES I SURVEYING

WISCONSIN OFFICE:
20725 WATERTOWN ROAD, SUITE 100
BROOKFIELD, WI 53186
(262) 754-8888
CHICAGO I MILWAUKEE : NATIONWIDE

ZILBER INDUSTRIAL 3 @ LAKEVIEW CORPORATE PARK

108TH STREET & GREEN BAY ROAD (STH "31")
VILLAGE OF PLEASANT PRAIRIE, KENOSHA COUNTY

LANDSCAPE OVERVIEW & TREE PLAN

REVISIONS

1	VOPP SITE PLAN SUBMITTAL	03/20/26		
2	VOPP RESUBMITTAL	05/11/26		
3	VOPP RESUBMITTAL	07/17/26		
4	VOPP RESUBMITTAL	10/02/26		

PEG JOB No. 644.00-WI
PEG PM AJS
START DATE 03/20/26
SCALE 1" = 40'


SHEET L-1 thru L-5

© COPYRIGHT 2019

LANDSCAPE OVERVIEW & TREE PLAN


Z:\PROJECTS\2016\644.00-WI\CAD\SHEETS\644.00-WI-LANDSCAPE PLAN.DWG

THESE PLANS AND DESIGNS ARE COPYRIGHT PROTECTED AND MAY NOT BE USED IN WHOLE OR IN PART WITHOUT THE WRITTEN CONSENT OF PINNACLE ENGINEERING GROUP, LLC

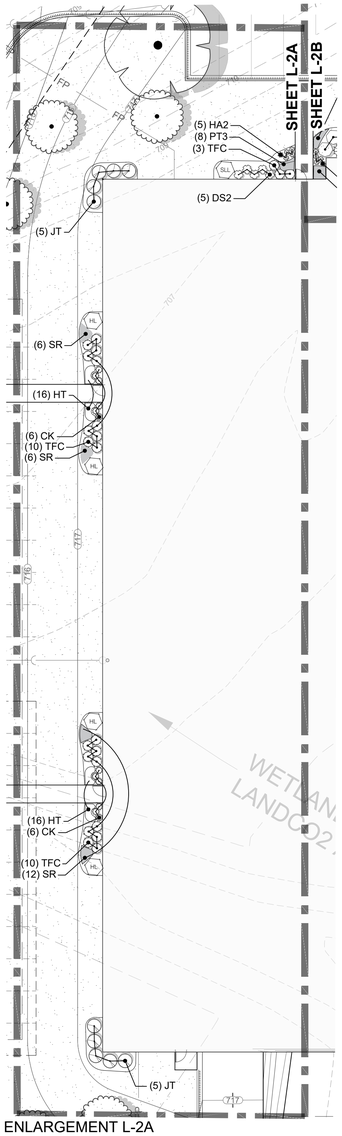

ENLARGEMENT L-2A

SCALE: 1"=20'

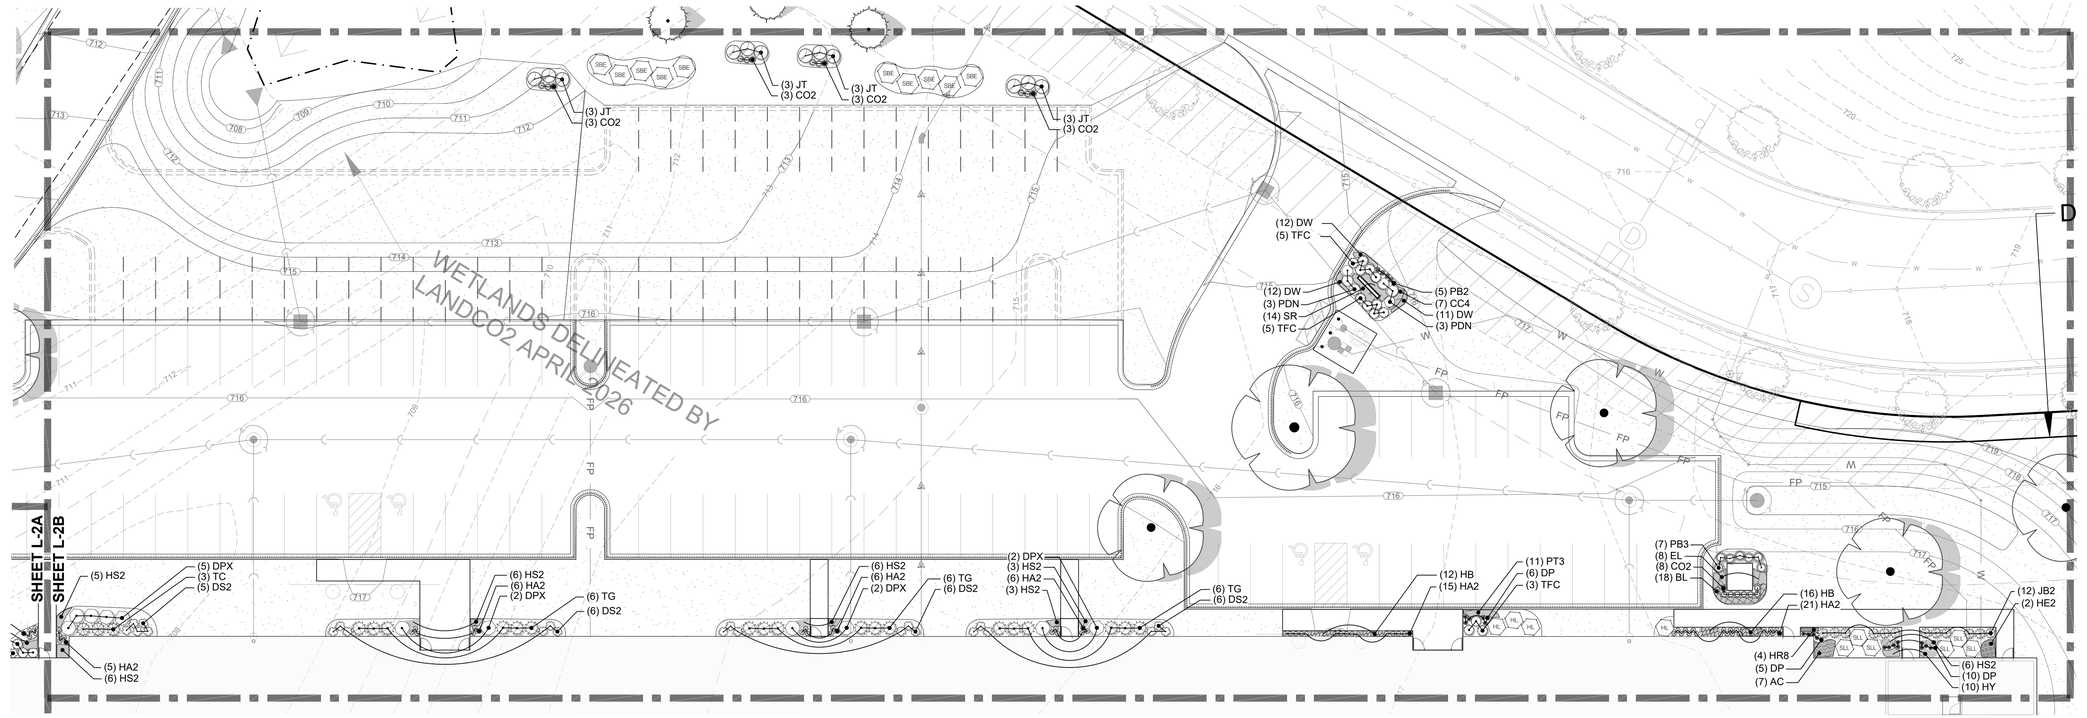

ENLARGEMENT L-2B

SCALE: 1"=20'

PLANT KEY

CODE	BOTANICAL NAME	COMMON NAME	SIZE
TREES			
ANO	Acer rubrum 'Northwood'	Northwood Maple	2" Cal.
CCH	Celtis occidentalis 'Chicagoland'	Chicagoland Hackberry	2" Cal.
GTIS	Gleditsia triacanthos inermis 'Sunburst'	Sunburst Common Honeylocust	2" Cal.
GHK	Gymnocladus dioica 'McKBranched'	Decaf Kentucky Coffee Tree	2" Cal.
TRL	Tilia americana 'Redmond'	Redmond American Linden	2" Cal.
EVERGREEN TREES			
PAN	Picea abies	Norway Spruce	6` Ht.
PGD	Picea glauca 'Densata'	Black Hills Spruce	6` Ht.
ORNAMENTAL TREES			
CFK	Carpinus caroliniana 'JN Strain'	Fire King Musclewood	1.5" Cal.
SHRUBS			
DPX	Diervilla x 'G2X885411'	Kodiak Red Diervilla	24" Ht.
HL	Hamamelis x intermedia 'Livia'	Livia Witch Hazel	24" Ht.
PDN	Physocarpus opulifolius `Nanus`	Dwarf Ninebark	18" Ht.
SBE	Sambucus nigra `Black Lace`	Black Lace Elderberry	24" Ht.
SLL	Sambucus racemosa `Lemony Lace`	Lemony Lace Elderberry	24" Ht.
EVERGREEN SHRUBS			
JT	Juniperus chinensis 'Trautman'	Trautman Juniper	4` Ht.
JB2	Juniperus horizontalis 'Blue Forest'	Blue Forest Creeping Juniper	24" W
PB3	Pinus strobus 'Blue Shag'	Blue Shag White Pine	24" Ht.
TG	Taxus x media 'SMNTHDB'	Stonehenge Dark Druid® Yew	24" Ht.
TC	Taxus x media 'SMNTHDC'	Stonehenge® Anglo-Japanese Yew	24" Ht.
TFC	Thuja occidentalis 'Congabe'	Fire Chief Arborvitae	24" Ht.
ORNAMENTAL GRASSES			
CK	Calamagrostis x acutiflora `Karl Foerster`	Feather Reed Grass	1 gal.
CO2	Calamagrostis x acutiflora 'Overdam'	Overdam Feather Reed Grass	1 gal.
DP	Deschampsia cespitosa 'Pixie Fountain'	Pixie Fountain Tufted Hair Grass	1 gal.
DS2	Deschampsia cespitosa 'Schottland'	Schottland Tufted Hair Grass	1 gal.
HA2	Hakonechloa macra 'All Gold'	All Gold Japanese Forest Grass	1 gal.
PB2	Pennisetum alopecuroides 'Little Bunny'	Little Bunny Fountain Grass	1 gal.

CODE	BOTANICAL NAME	COMMON NAME	SIZE
PERENNIALS			
AC	Astilbe x 'Chocolate Cherry'	Mighty© Chocolate Cherry Astilbe	1 gal.
BL	Brunnera macrophylla 'Looking Glass'	Looking Glass Siberian Bugloss	1 gal.
CC4	Coreopsis grandiflora 'Sunburst'	Sunburst Tickseed	1 gal.
DW	Dianthus gratianopolitanus 'Firewitch'	Firewitch Cheddar Pink	1 gal.
EL	Eupatorium dubium `Little Joe`	Joe-Pye Weed	1 gal.
HT	Helenium autumnale `Short `n Sassy`	Short `n Sassy Sneezeweed	1 gal.
HB	Heuchera x 'Berry Smoothie'	Berry Smoothie Coral Bells	1 gal.
HE2	Hosta x `Empress Wu`	Empress Wu Plantain Lily	1 gal.
HY	Hosta x 'Diana Remembered'	Diana Remembered Hosta	1 gal.
HR8	Hosta x 'Rainforest Sunrise'	Rainforest Sunrise Hosta	1 gal.
PT3	Pulmonaria x ``Trevi Fountain`	Lungwort	1 gal.
SR	Solidago rugosa 'Fireworks'	Fireworks Wrinkleleaf Goldenrod	1 gal.
HS2	x Heucherella x `Sweet Tea`	Sweet Tea Foamy Bells	1 gal.

SYMBOL	BOTANICAL NAME	COMMON NAME
AGRECOL MIXES		
	AGRECOL RAINWATER RENEWAL	AGRECOL RAINWATER RENEWAL SEED MIX
TURF		
	Turf	Drought Tolerant Fescue Blend

NORTH

GRAPHICAL SCALE (FEET)

0 1" = 20' 40'

www.pinnacle-engr.com

LANDSCAPE SHRUB & PERENNIAL PLAN

REVIEWED: DJB
DESIGNED: SAT
DRAFTED: SAT

PLAN I DESIGN I DELIVER
www.pinnacle-engr.com

PINNACLE ENGINEERING GROUP
ENGINEERING I NATURAL RESOURCES I SURVEYING

WISCONSIN OFFICE:
20725 WATERTOWN ROAD, SUITE 100
BROOKFIELD, WI 53186
(262) 754-8888
CHICAGO I MILWAUKEE : NATIONWIDE

ZILBER INDUSTRIAL 3 @ LAKEVIEW CORPORATE PARK

108TH STREET & GREEN BAY ROAD (STH "31")
VILLAGE OF PLEASANT PRAIRIE, KENOSHA COUNTY

LANDSCAPE SHRUB & PERENNIAL PLAN

REVISIONS


1	VOPP SITE PLAN SUBMITTAL	03/20/26	
2	VOPP RESUBMITTAL	05/11/26	
3	VOPP RESUBMITTAL	07/17/26	
4	VOPP RESUBMITTAL	10/02/26	

PEG JOB No. 644.00-WI | AJS
PEG PM
START DATE 03/20/26
SCALE 1" = 20'

SHEET L-2 L-5


©COPYRIGHT 2019

Z:\PROJECTS\2016\644.00-WI\CAD\SHEETS\644.00-WI-LANDSCAPE PLAN.DWG

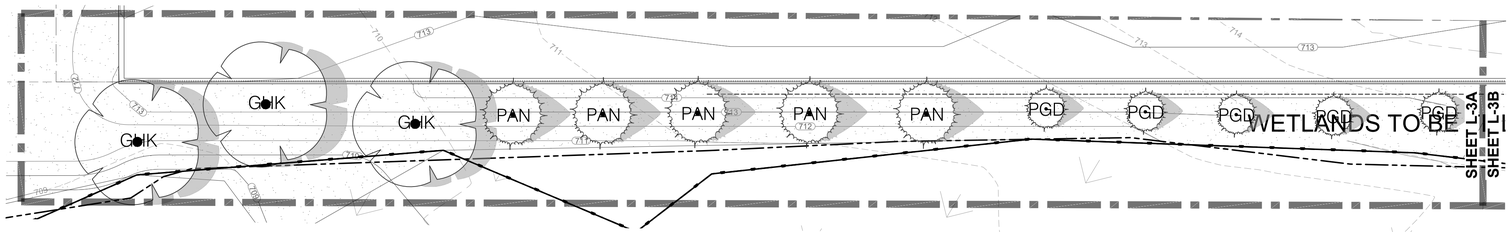

ENLARGEMENT L-3A

SCALE: 1"=20'

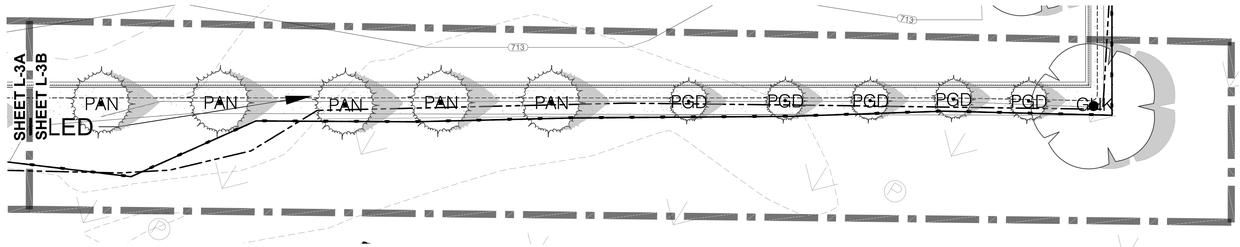

ENLARGEMENT L-3B

SCALE: 1"=20'

NOTES

* TREES AND TURF TO BE INSTALLED OUTSIDE OF WETLANDS

PLANT SCHEDULE

CODE	QTY	BOTANICAL / COMMON NAME	SIZE
TREES			
ANO	5	Acer rubrum 'Northwood' / Northwood Maple 50' T x 35' W	2" Cal.
CCH	2	Celtis occidentalis 'Chicagoland' / Chicagoland Hackberry 50' T x 40' W	2" Cal.
GTIS	6	Gleditsia triacanthos inermis 'Sunburst' / Sunburst Common Honeylocust 45' T x 35' W	2" Cal.
GHK	6	Gymnocladus dioica 'McKBranched' / Decaf Kentucky Coffee Tree 50' T x 40' W	2" Cal.
TRL	4	Tilia americana 'Redmond' / Redmond American Linden 50' T x 35' W	2" Cal.
EVERGREEN TREES			
PAN	15	Picea abies / Norway Spruce 60` T x 25` W	6` Ht.
PGD	13	Picea glauca 'Densata' / Black Hills Spruce 30` T x 15` W	6` Ht.
ORNAMENTAL TREES			
CFK	6	Carpinus caroliniana 'JN Strain' / Fire King Musclewood 20` T x 20` W	1.5" Cal.
SHRUBS			
DPX	11	Diervilla x 'G2X885411' / Kodiak Red Diervilla 3` T X 4` W	24" Ht.
HL	8	Hamamelis x intermedia 'Livia' / Livia Witch Hazel 4` T x 5` W	24" Ht.
PDN	6	Physocarpus opulifolius `Nanus` / Dwarf Ninebark 2` T x 3` W	18" Ht.
SBE	10	Sambucus nigra `Black Lace` / Black Lace Elderberry 6` T x 6` W	24" Ht.
SLL	7	Sambucus racemosa `Lemony Lace` / Lemony Lace Elderberry 5` T x 5` W	24" Ht.
EVERGREEN SHRUBS			
JT	22	Juniperus chinensis 'Trautman' / Trautman Juniper 12` T x 4` W	4` Ht.
JB2	12	Juniperus horizontalis 'Blue Forest' / Blue Forest Creeping Juniper 1` T x 4` W	24" W
PB3	7	Pinus strobus 'Blue Shag' / Blue Shag White Pine 4` T x 3` W	24" Ht.
TG	18	Taxus x media 'SMNTHDB' / Stonehenge Dark Druid® Yew 4` T x 4` W	24" Ht.
TC	3	Taxus x media 'SMNTHDC' / Stonehenge® Anglo-Japanese Yew 10` T x 4` W	24" Ht.
TFC	36	Thuja occidentalis 'Congabe' / Fire Chief Arborvitae 3` T x 3` W	24" Ht.
ORNAMENTAL GRASSES			
CK	12	Calamagrostis x acutiflora `Karl Foerster` / Feather Reed Grass 4` T x 2` W	1 gal.
CO2	20	Calamagrostis x acutiflora 'Overdam' / Overdam Feather Reed Grass 2` T x 2` W	1 gal.
DP	21	Deschampsia cespitosa 'Pixie Fountain' / Pixie Fountain Tufted Hair Grass 18" T x 15" W	1 gal.
DS2	28	Deschampsia cespitosa 'Schottland' / Schottland Tufted Hair Grass 4` T x 3` W	1 gal.
HA2	64	Hakonechloa macra 'All Gold' / All Gold Japanese Forest Grass 20" T x 15" W	1 gal.
PB2	5	Pennisetum alopecuroides 'Little Bunny' / Little Bunny Fountain Grass 18" T x 18" W	1 gal.

CODE	QTY	BOTANICAL / COMMON NAME	SIZE	SPACING
PERENNIALS				
AC	7	Astilbe x 'Chocolate Cherry' / Mighty® Chocolate Cherry Astilbe 40" T x 28" W	1 gal.	24" o.c.
BL	18	Brunnera macrophylla 'Looking Glass' / Looking Glass Siberian Bugloss 18" T x 18" W	1 gal.	15" o.c.
CC4	7	Coreopsis grandiflora 'Sunburst' / Sunburst Tickseed 12" T x 18" W	1 gal.	15" o.c.
DW	35	Dianthus gratianopolitanus 'Firewitch' / Firewitch Cheddar Pink 6" T x 12" W	1 gal.	10" o.c.
EL	8	Eupatorium dubium `Little Joe` / Joe-Pye Weed 48" T x 28" W	4.5" Cont.	25" o.c.
HT	32	Helenium autumnale `Short `n Sassy` / Short `n Sassy Sneezeweed 15" T x 20" W	4.5" Cont.	15" o.c.
HB	28	Heuchera x 'Berry Smoothie' / Berry Smoothie Coral Bells 18" T x 18" W	1 gal.	15" o.c.
HE2	2	Hosta x `Empress Wu` / Empress Wu Plantain Lily 48" T x 65" W	1 gal.	50" o.c.
HY	10	Hosta x 'Diana Remembered' / Diana Remembered Hosta 15" T x 20" W	1 gal.	18" o.c.
HR8	4	Hosta x 'Rainforest Sunrise' / Rainforest Sunrise Hosta 12" T x 18" W	1 gal.	16" o.c.
PT3	19	Pulmonaria x `Trevi Fountain` / Lungwort 12" T x 18" W	1 gal.	15" o.c.
SR	38	Solidago rugosa 'Fireworks' / Fireworks Wrinkleleaf Goldenrod 36" T x 22" W	1 gal.	18" o.c.
HS2	35	x Heucherella x `Sweet Tea` / Sweet Tea Foamy Bells 20" T x 24" W	1 gal.	18" o.c.

SYMBOL	QTY	BOTANICAL / COMMON NAME
AGRECOL MIXES		
	18,873 sf	AGRECOL RAINWATER RENEWAL / AGRECOL RAINWATER RENEWAL SEED MIX
TURF		
	164,235 sf	Turf / Drought Tolerant Fescue Blend

NORTH

GRAPHICAL SCALE (FEET)

0 1" = 20' 40'

LANDSCAPE ENLARGEMENT

THESE PLANS AND DESIGNS ARE COPYRIGHT PROTECTED AND MAY NOT BE USED IN WHOLE OR IN PART WITHOUT THE WRITTEN CONSENT OF PINNACLE ENGINEERING GROUP, LLC

DRAFTED: SAT
DESIGNED: SAT
REVIEWED: DJB

www.pinnacle-engr.com

PLAN I DESIGN I DELIVER
www.pinnacle-engr.com

PINNACLE ENGINEERING GROUP
ENGINEERING I NATURAL RESOURCES I SURVEYING

WISCONSIN OFFICE:
20725 WATERTOWN ROAD, SUITE 100
BROOKFIELD, WI 53186
(262) 754-8888
CHICAGO I MILWAUKEE : NATIONWIDE

ZILBER INDUSTRIAL 3 @ LAKEVIEW CORPORATE PARK

108TH STREET & GREEN BAY ROAD (STH "31")
VILLAGE OF PLEASANT PRAIRIE, KENOSHA COUNTY

LANDSCAPE ENLARGEMENT

REVISIONS

1	VOPP SITE PLAN SUBMITTAL	03/20/26		
2	VOPP RESUBMITTAL	05/11/26		
3	VOPP RESUBMITTAL	07/17/26		
4	VOPP RESUBMITTAL	10/02/26		

PEG JOB No. 644.00-WI
PEG PM AJS
START DATE 03/20/26
SCALE 1" = 20'

SHEET
L-3
L-5

© COPYRIGHT 2019

Z:\PROJECTS\2016\644.00-WI\CAD\SHEETS\644.00-WI-LANDSCAPE PLAN.DWG

THESE PLANS AND DESIGNS ARE COPYRIGHT PROTECTED AND MAY NOT BE USED IN WHOLE OR IN PART WITHOUT THE WRITTEN CONSENT OF PINNACLE ENGINEERING GROUP, LLC

GENERAL PLANTING NOTES

1. THE LAYOUT OF ALL PLANTING BEDS AND INDIVIDUAL TREES AND SHRUBS SHALL BE STAKED BY THE CONTRACTOR IN ADVANCE OF INSTALLATION. FLAGGING, STAKES, OR PAINT MAY BE USED TO DELINEATE LOCATIONS AS SCALED FROM THE PLANS. AN APPROVED REPRESENTATIVE WILL REVIEW THESE LOCATIONS WITH THE CONTRACTOR AND MAKE MINOR ADJUSTMENTS AS NECESSARY. BED LAYOUT SHALL ALSO INCLUDE PERENNIAL GROUPINGS BY SPECIES.
2. THE CONTRACTOR IS RESPONSIBLE FOR INDEPENDENTLY DETERMINING THE PLANT MATERIAL QUANTITIES REQUIRED BY THE LANDSCAPE PLANS. REPORT ANY DISCREPANCIES TO THE LANDSCAPE ARCHITECT.
3. NO PLANT MATERIAL OR PLANT SIZE SUBSTITUTIONS WILL BE ACCEPTED WITHOUT APPROVAL BY THE LANDSCAPE ARCHITECT. ANY CHANGES SHALL BE SUBMITTED TO THE LANDSCAPE ARCHITECT IN WRITING PRIOR TO INSTALLATION.
4. ALL BNB STOCK SHALL BE NURSERY GROWN IN A CLAY LOAM SOIL FOR A MINIMUM OF THREE GROWING SEASONS WITHIN 200 MILES OF PROJECT LOCATION, IN A ZONE COMPATIBLE WITH USDA HARDINESS ZONE 5A. SEED SHALL BE PROVIDED FROM A NURSERY (WITHIN 200 MILES) WITH A SIMILAR PLANT HARDINESS ZONE AS PROJECT LOCATION. EXISTING SOIL SHALL BE AMENDED PER SOIL ANALYSIS REPORT TO ENSURE A PROPER GROWING MEDIUM IS ACHIEVED.
5. ALL PLANT MATERIAL SHALL COMPLY WITH STANDARDS DESCRIBED IN AMERICAN STANDARD OF NURSERY STOCK - Z60.1 ANSI. LANDSCAPE ARCHITECT OR OWNERS AUTHORIZED REPRESENTATIVE RESERVES THE RIGHT TO INSPECT AND POTENTIALLY REJECT ANY PLANT MATERIAL DEEMED TO NOT MEET THE REQUIRED STANDARDS.
6. ALL STOCK SHALL BE FREE OF DISEASES AND HARMFUL INSECTS, DAMAGE, DISORDERS AND DEFORMITIES.
7. TREES SHALL HAVE SINGLE, STRAIGHT TRUNKS AND WELL BALANCED BRANCH SYSTEMS. MUTLI-STEM TREES SHALL HAVE 3-4 STRAIGHT TRUNKS AND WELL BALANCED BRANCH SYSTEMS. HEIGHT-TO-CALIPER RATIOS SHALL BE CONSISTENT WITH THE LATEST EDITION OF ANSI Z60.1.
8. ROOT SYSTEMS SHALL BE LARGE ENOUGH TO ALLOW FOR FULL RECOVERY OF THE TREE, AND SHALL CONFORM TO STANDARDS AS THEY APPEAR IN THE MOST CURRENT REVISION OF THE AMERICAN ASSOCIATION OF NURSERYMEN'S AMERICAN STANDARD OF NURSERY STOCK ANSI Z60.1.
9. BNB TREES SHALL BE DUG WITH A BALL OF SOIL, NOT SOFT BALLED OR POTTED AND SHALL BE FIRM IN THEIR ROOTBALL. ROOT BALL SHALL BE WRAPPED (WITH BIODEGRADABLE MATERIAL). THE TREE ROOT FLARE, OR COLLAR, SHALL BE AT OR WITHIN THE TOP THREE INCHES OF GRADE.
10. ALL SPRING TREES MUST BE FRESHLY DUG IN THE MOST RECENT SPRING.
11. ALL AUTUMN TREES MUST BE FRESHLY DUG IN THE MOST RECENT AUTUMN.
12. TREES SHALL BE ALIVE, HEALTHY AND APPROPRIATELY MOIST, AT TIME OF DELIVERY. TREES SHALL BE SUBJECT TO INSPECTION FOR CONFORMITY TO SPECIFICATION REQUIREMENTS AND APPROVAL BY THE LANDSCAPE ARCHITECT OR OWNERS REPRESENTATIVE. THE LANDSCAPE ARCHITECT OR OWNERS REPRESENTATIVE RESERVES THE RIGHT TO REJECT ANY TREES THAT DO NOT MEET THE SPECIFICATIONS OR THAT HAVE BEEN DAMAGED DURING SHIPMENT. THE LANDSCAPE INSTALLER MUST RECEIVE APPROVAL FROM LANDSCAPE ARCHITECT FOR ANY SUBSTITUTIONS OR ALTERATIONS.
13. ALL PLANT MATERIAL SHALL BE INSTALLED IN ACCORDANCE WITH PLANTING DETAILS.
14. ALL PLANTING BEDS SHALL HAVE A MINIMUM 10" DEPTH OF PREPARED SOIL. WITH APPROVAL, EXISTING SOIL MAY BE UTILIZED PROVIDED THE PROPER SOIL AMENDMENTS ARE TILLED THOROUGHLY INTO THE TOP 10" OF SOIL. REFER TO SOIL PLACEMENT NOTES.
15. WHILE PLANTING TREES AND SHRUBS, BACKFILL $\frac{2}{3}$ OF PLANTING HOLE AND WATER TREE THOROUGHLY BEFORE INSTALLING THE REMAINDER OF SOIL MIXTURE. AFTER ALL SOIL HAS BEEN PLACED INTO THE PLANTING HOLE WATER THOROUGHLY AGAIN.
16. THE CONTRACTOR MUST LABEL ALL TREES WITH THE COMMON AND BOTANICAL NAMES PRIOR TO FINAL INSPECTION.
17. ALL PLANTING BEDS SHALL BE MULCHED WITH 3" DEEP SHREDDED HARDWOOD MULCH, AND ALL TREES PLANTED IN TURF AREAS SHALL RECEIVE A 3" DEEP SHREDDED HARDWOOD MULCHED RING AS SHOWN IN PLANTING DETAILS.
18. ALL PLANTING BEDS AND TREE RINGS SHALL HAVE A 4" DEEP TRENCHED BED EDGE CREATED BY EITHER A FLAT LANDSCAPE SPADE OR MECHANICAL EDGER. BED EDGES ARE TO BE CUT CLEAN AND SMOOTH AS SHOWN ON LANDSCAPE PLANS WITH A CLEAN DEFINITION BETWEEN TURF AND PLANTING AREAS.
19. ALL TURF SEED AREAS SHALL RECEIVE A MINIMUM OF 6" DEPTH OF TOPSOIL. WITH APPROVAL, EXISTING SOIL MAY BE UTILIZED PROVIDED THE PROPER SOIL AMENDMENTS ARE TILLED THOROUGHLY INTO THE TOP 6" OF SOIL AS INDICATED IN THE SOIL PLACEMENT NOTES. REQUIRED AMENDMENTS SHALL BE DETERMINED BASED ON A SOIL ANALYSIS TO BE PERFORMED. ALL TOPSOIL AMENDMENT SHALL BE AGED WEED FREE MANURE OR CLASS 1 ORGANIC MATTER.
20. FOR LAWN SEEDING, APPLY A STARTER FERTILIZER AND SEED UNIFORMLY AT THE RATE RECOMMENDED BY MANUFACTURER, AND PROVIDE A MULCH COVERING THAT IS SUITABLE TO PROMOTE SEED GERMINATION AND TURF ESTABLISHMENT. CONTRACTOR TO PROVIDE FERTILIZER, SEED, AND MULCH SPECIFICATIONS TO THE LANDSCAPE ARCHITECT FOR APPROVAL PRIOR TO INSTALLATION. EROSION CONTROL MEASURES ARE TO BE INSTALLED IN THOSE AREAS REQUIRING STABILIZATION (SWALES, SLOPES EXCEEDING 1:3, AND THOSE LOCATIONS INDICATED IN CIVIL DRAWINGS).
21. THE CONTRACTOR TO ENSURE A SMOOTH, UNIFORM QUALITY TURF IS ACHIEVED WITH NO BARE SPOTS LARGER THAN 6" X 6". ANY BARE SPOTS LARGER THAN 6" X6" AT THE END OF ESTABLISHMENT PERIOD SHALL BE RESEEDED AT THE CONTRACTORS EXPENSE TO OBTAIN A DENSE, UNIFORM LAWN.
22. ALL FINISH GRADING AND LAWN AREAS TO BE INSTALLED BY LANDSCAPE CONTRACTOR.
23. ALL DISTURBED AREAS WITHIN THE PROJECT SHALL BE RESTORED TO ORIGINAL OR BETTER CONDITION.
24. ALL DISTURBED AREAS OUTSIDE THE LIMITS OF WORK SHALL BE RESTORED TO ORIGINAL OR BETTER CONDITION AT NO ADDITIONAL COST TO THE OWNER.
25. THE CONTRACTOR SHALL VERIFY ALL EXISTING UTILITIES, INCLUDING ANY IRRIGATION LINES, PRIOR TO DIGGING. CONSULT DIGGERS HOTLINE.
26. TREES SHALL BE INSTALLED NO CLOSER THAN:
    - -10 FEET FROM ANY FIRE HYDRANT
    - 7 FEET FROM STORM SEWER, SANITARY SEWER LATERALS, AND WATER SERVICE
27. THE CONTRACTOR SHALL ENSURE THAT SOIL CONDITIONS AND COMPACTION ARE ADEQUATE TO ALLOW FOR PROPER DRAINAGE AROUND THE CONSTRUCTION SITE. UNDESIRABLE CONDITIONS SHALL BE BROUGHT TO THE ATTENTION OF THE LANDSCAPE ARCHITECT PRIOR TO BEGINNING OF WORK. IT SHALL BE THE CONTRACTOR'S RESPONSIBILITY TO ENSURE PROPER SURFACE AND SUBSURFACE DRAINAGE IN ALL AREAS
28. THE CONTRACTOR IS RESPONSIBLE FOR ALL PERMITS, FEES, AND LICENSES NECESSARY FOR THE INSTALLATION OF THIS PLAN.
29. THE CONTRACTOR IS TO REVIEW ALL SITE ENGINEERING DOCUMENTS PRIOR TO INSTALLATION. ANY CONFLICTS MUST BE REPORTED TO THE LANDSCAPE ARCHITECT. THESE LANDSCAPE DRAWINGS ARE FOR THE INSTALLATION OF PLANT MATERIALS ONLY UNLESS OTHERWISE STATED.
30. THE CONTRACTOR SHALL PROVIDE WATERING AND MAINTENANCE SERVICES FOR A PERIOD OF 60 DAYS TO ENSURE VEGETATIVE ESTABLISHMENT. UPON COMPLETION OF THE PROJECT, CONTRACTOR SHALL SUPPLY THE OWNER IN WRITING WITH ONGOING WATERING AND MAINTENANCE INSTRUCTIONS.
31. PLANT MATERIALS SHALL BE GUARANTEED FOR A PERIOD OF ONE (1) YEAR FROM TIME OF OWNER ACCEPTANCE. ONLY ONE REPLACEMENT PER PLANT WILL BE REQUIRED DURING THE WARRANTY PERIOD EXCEPT IN THE EVENT OF FAILURE TO COMPLY WITH THE SPECIFIED REQUIREMENTS.
32. THE CONTRACTOR IS RESPONSIBLE TO CONDUCT A FINAL WALK THROUGH WITH THE LANDSCAPE ARCHITECT AND OR OWNERS REPRESENTATIVE TO ANSWER QUESTIONS, PROVIDE INSTRUCTIONS, AND ENSURE THAT PROJECT REQUIREMENTS HAVE BEEN MET.

SOIL PLACEMENT NOTES

1. LOOSEN SUBGRADE TO A MINIMUM DEPTH INDICATED IN PLANTING NOTES USING A CULTI-MULCHER OR SIMILAR EQUIPMENT, AND REMOVE STONES MEASURING OVER 1-1/2 INCHES IN ANY DIMENSION, STICKS, RUBBISH AND OTHER EXTRANEOUS MATTER. AREAS ADJACENT TO WALKS AND PAVEMENT SHALL BE FREE OF EXCESS STONE AND PAVING MATERIALS SO AS TO PROVIDE AN UNINTERRUPTED CROSS SECTION OF SOIL. INTERNAL PARKING ISLANDS SHALL BE LOOSENED TO A DEPTH OF 30".
2. THOROUGHLY BLEND PLANTING SOIL MIX FOR PLANTING BED AREAS. (1 PART EXISTING SOIL, 1 PART TOPSOIL, 1 PART ORGANIC SOIL AMENDMENT, 2.9 POUNDS PER CUBIC YARD OF 4-4-4 ANALYSIS SLOW-RELEASE FERTILIZER)
3. TREE AND SHRUB HOLES SHALL BE FILLED WITH A PREPARED PLANTING MIXTURE OF 1 PART TOPSOIL, 2 PARTS PLANTING SOIL MIX.
4. SPREAD SOIL AND SOIL AMENDMENTS TO DEPTH INDICATED ON DRAWINGS, BUT NOT LESS THAN REQUIRED TO MEET FINISH GRADES AFTER NATURAL SETTLEMENT. (FINISH GRADE OF PLANTING BEDS SHALL BE 3" BELOW ALL ADJACENT SURFACES. FINISH GRADE OF TURF SEEDING AREAS SHALL BE 1" BELOW ALL ADJACENT HARD SURFACES, WALKS, AND CURBS.)
5. PLACE APPROXIMATELY 1/2 OF TOTAL AMOUNT OF SOIL REQUIRED. WORK INTO TOP OF LOOSENED SUBGRADE TO CREATE A TRANSITION LAYER, THEN PLACE REMAINDER OF THE SOIL. SOIL TRANSITION LAYER SHALL BE TILLED TO A MINIMUM DEPTH OF 6" BELOW THE DEPTH OF NEWLY PLACED SOIL. PARKING LOT ISLANDS SHALL BE CROWNED TO A HEIGHT OF 6" TO PROVIDE PROPER DRAINAGE UNLESS OTHERWISE NOTED.
6. DO NOT SPREAD IF PLANTING SOIL OR SUBGRADE IS FROZEN, MUDDY, OR EXCESSIVELY WET.
7. FINISH GRADING: GRADE SOIL TO A SMOOTH, UNIFORM SURFACE PLANE WITH A LOOSE, UNIFORMLY FINE TEXTURE.
8. ROLL AND RAKE, REMOVE RIDGES, AND FILL DEPRESSIONS TO MEET FINISH GRADES.
9. RESTORE PLANTING BEDS IF ERODED OR OTHERWISE DISTURBED AFTER FINISH GRADING AND BEFORE PLANTING.

NATIVE SEEDING

ESTABLISHMENT OF A VIABLE VEGETATION COMMUNITY WILL BE COMPLETED BY HAND-BROADCASTING OF PRE-DESIGNED SEED MIXES TO CREATE A DYNAMIC PLANTING.

PRIOR TO SEEDING:

A. ALL WEEDS AND EXISTING VEGETATION SHALL BE REMOVED. EXISTING VEGETATION SHALL BE TREATED WITH GLYPHOSATE OR SIMILAR HERBICIDE BY A LICENSED PROFESSIONAL. TREATMENT SHALL OCCUR A MINIMUM OF 10 DAYS PRIOR TO SEEDING/PLANTING. VEGETATION STILL ALIVE AFTER INITIAL HERBICIDE TREATMENT SHALL BE TREATED A SECOND TIME PRIOR TO TILLING INTO THE SOIL.TREATED VEGETATION SHALL BE TILLED INTO THE SOIL NO EARLIER THAN 1 DAY PRIOR TO SEEDING.

B. PREPARATION OF SOIL PRIOR TO SEEDING
   1. REFER TO CIVIL PLANS FOR SOIL MIXTURE.
   2. ALL FOREIGN MATERIALS LARGER THAN 1-INCH SHALL BE REMOVED FROM THE SOIL PRIOR TO SEEDING OR PLANTING.
   3. AREA SHOULD BE FREE FROM UNSIGHTLY VARIATIONS, RIDGES, AND DEPRESSIONS.
   4. AVOID DRIVING OVER THE SPECIFIED AREA WITH MACHINERY.

SPECIFICATIONS FOR HAND BROADCASTING:

SEEDING SHALL BE CONDUCTED IN LATE FALL (SEPTEMBER 1- SOIL FREEZE) SO THAT SEEDS MAY LIE DORMANT DURING THE WINTER, ALLOWING FOR STRATIFICATION, OR SPRING (MARCH 1-JUNE 1) TO ALLOW A COMPLETE GROWING SEASON TO BECOME ESTABLISHED.

A. COVER CROP
   1. ANNUAL RYE SHALL BE SPREAD AT A DENSITY OF 20 POUNDS PER ACRE DURING THE PLANTING OR SEEDING OF THE NATIVE PLANT SPECIES TO STABILIZE THE SOIL AND REDUCE THE GROWTH OF UNWANTED VEGETATION. THIS ANNUAL GRASS GROWS RAPIDLY WITHOUT COMPETING WITH THE WILDFLOWERS AND GRASSES THAT ARE PLANTED IN THE TARGET AREAS.
   2. WINTER WHEAT OR PERENNIAL RYE SHALL NOT BE USED AS A COVER CROP. THESE GRASSES MAY OUT COMPETE PRAIRIE SEEDLINGS, LEADING TO A REDUCTION IN THE SUCCESS OF THE PLANTINGS.

B. SEED MIX:
   1. MIX ALL NATIVE SEED WITH VERMICULITE ACCORDING TO AGRECOL RECOMMENDATIONS AND INSTALLATION GUIDELINES.
   2. BROADCAST HALF THE SEED OVER THE ENTIRE SITE OR TARGET AREA.
   3. BROADCAST THE OTHER HALF OF SEED PERPENDICULAR TO THE DIRECTION THAT THE FIRST HALF OF THE SEED WAS BROADCAST.
   4. COVER SEED WITH ¼ -INCH TO ½ -INCH OF SOIL (USE ANY EXCESS SOIL FROM THE SITE) WITH RAKE OR DRAG.
   5. ROLL SITE TO ENSURE FIRM SEED-TO-GROUND CONTACT.
   6. KEEP SEED CONSTANTLY WET THROUGH GERMINATION PERIOD. GENERALLY 3 WEEKS.

ALL SEEDING SHALL BE COVERED WITH 1-INCH OF CLEAN, NON-INVASIVE STRAW (NO MARSH HAY, OR REED CANARY GRASS) WITHOUT SEEDS, WITHIN SEVEN DAYS. WHEAT, RYE, OATS, OR BARLEY ARE ACCEPTABLE FORMS OF STRAW. THOSE AREAS OF SLOPES STEEPER THAN 8:1 (EIGHT FEET HORIZONTAL TO ONE FOOT VERTICAL) SHALL BE PLANTED NO LATER THAN OCTOBER 1 AND STAKED WITH AN EROSION CONTROL BLANKET TO PREVENT EROSION.

NATIVE PLANTINGS:

WEED SUPPRESSION MEASURES:

1st YEAR - PERFORM SPOT SPRAY WITH HERBICIDE TO SUPPRESS WEEDS. THIS SHOULD OCCUR APPROXIMATELY EVERY MONTH OF THE GROWING SEASON AFTER NATIVE PLANTINGS HAVE BEEN ROUGH GRADED.

2nd YEAR - IN MAY/JUNE MOW NATIVE PLANTINGS AT 6" HEIGHT TO SUPPRESS THE WEEDS. PERFORM SPOT SPRAY WITH HERBICIDE TO SUPPRESS WEEDS. HAVE PROFESSIONAL ASSESS PLANTINGS. REPEAT MOWING NATIVE PLANTINGS AND SPOT-SPRAY IN EARLY JULY.

3rd YEAR - IN MAY/JUNE MOW NATIVE PLANTINGS AT 8" HEIGHT TO SUPPRESS THE WEEDS. PERFORM SPOT SPRAY WITH HERBICIDE TO SUPPRESS WEEDS.

4th YEAR - IN MAY PERFORM A PRESCRIBED BURN. IN JUNE HAVE A QUALIFIED PROFESSIONAL ASSESS PLANTINGS. IF A PRESCRIBED BURN CAN NOT BE UTILIZED, NATIVE PLANTINGS SHALL BE CUT TO THE GROUND AND ALL CUT MATERIAL SHALL BE REMOVED AND DISPOSED OF OFF SITE.

REVIEWED: DJB
DESIGNED: SAT
DRAFTED: SAT

PINNACLE ENGINEERING GROUP
ENGINEERING I NATURAL RESOURCES I SURVEYING
PLAN I DESIGN I DELIVER
www.pinnacle-engr.com
WISCONSIN OFFICE:
20725 WATERTOWN ROAD, SUITE 100
BROOKFIELD, WI 53186
(262) 754-8888
CHICAGO I MILWAUKEE - NATIONWIDE

ZILBER INDUSTRIAL 3 @ LAKEVIEW CORPORATE PARK

108TH STREET & GREEN BAY ROAD (STH "31")
VILLAGE OF PLEASANT PRAIRIE, KENOSHA COUNTY

LANDSCAPE GENERAL NOTES

REVISIONS

1	VOPP SITE PLAN SUBMITTAL	03/20/26			
2	VOPP RESUBMITTAL	05/11/26			
3	VOPP RESUBMITTAL	07/17/26			
4	VOPP RESUBMITTAL	10/02/26			

PEG JOB No. 644.00-WI
PEG PM AJS
START DATE 03/20/26
SCALE N/A

SHEET
L-4
L-5


© COPYRIGHT 2019

LANDSCAPE GENERAL NOTES


www.pinnacle-engr.com

Z:\PROJECTS\2016\644.00-WI\CAD\SHEETS\644.00-WI-LANDSCAPE PLAN.DWG


THESE PLANS AND DESIGNS ARE COPYRIGHT PROTECTED AND MAY NOT BE USED IN WHOLE OR IN PART WITHOUT THE WRITTEN CONSENT OF PINNACLE ENGINEERING GROUP, LLC

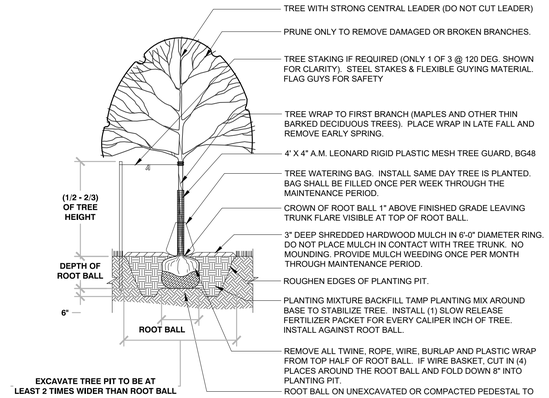


1 TREE PLANTING
1/4" = 1'-0" 329343-01

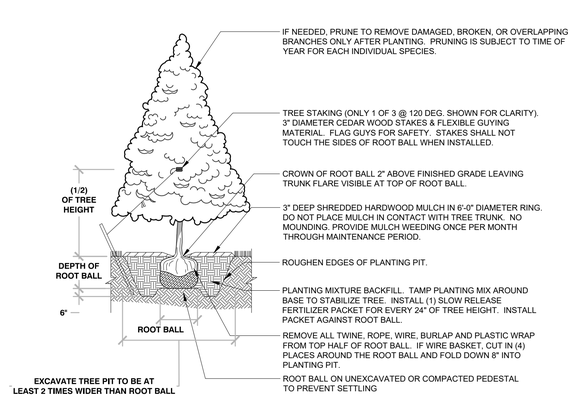

2 EVERGREEN TREE PLANTING
1/4" = 1'-0" 329343-03

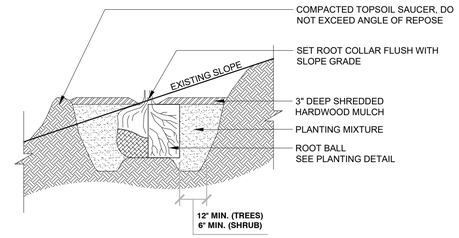


3 TREE PLANTING ON SLOPE
3/8" = 1'-0" 329343-02

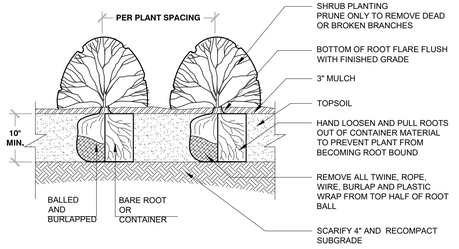


BAREROOT PLANTING NOTES:
1. SOAK ROOTS IN WATER FOR AT LEAST ONE HOUR BUT NOT MORE THAN 24 HOURS PRIOR TO PLANTING.
2. SCARIFY SIDES AND BOTTOMS OF HOLE.
3. PROCEED WITH CORRECTIVE PRUNING OF THE TOP AND BOTTOM ROOTS.
4. TRANSFER PLANT DIRECTLY FROM WATER TO HOLE. SET PLANT SO THE ROOT FLARE IS APPROXIMATELY AT THE FINISHED SOIL ELEVATION. SPREAD ROOTS OUT EVENLY. PLUMB AND IMMEDIATELY BACKFILL WITH PLANTING SOIL MIX.
5. WATER THOROUGHLY WITHIN 2 HOURS TO SETTLE PLANTS AND FILL VOIDS.
6. BACKFILL VOIDS AND WATER SECOND TIME.
7. PLACE MULCH WITHIN 48 HOURS OF THE SECOND WATERING UNLESS SOIL MOISTURE IS EXCESSIVE.

4 SHRUB PLANTING
1/2" = 1'-0" 329333-02

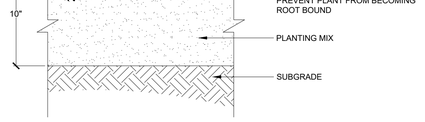


5 PERENNIAL PLANTING
1" = 1'-0" 3293-01

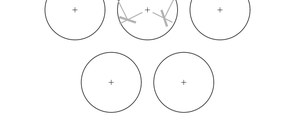

(*) = SPECIFIED PLANT SPACING PER PLANTING LIST

6 PLANT SPACING
3/4" = 1'-0" 3293-02

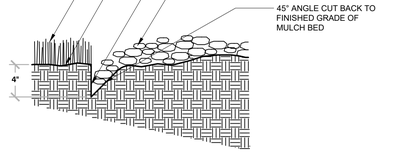

7 TRENCHED BED EDGE
3/4" = 1'-0" 3293-03

PLAN | DESIGN | DELIVER
www.pinnacle-engr.com
PINNACLE ENGINEERING GROUP
ENGINEERING | NATURAL RESOURCES | SURVEYING
WISCONSIN OFFICE:
20725 WATERTOWN ROAD, SUITE 100
BROOKFIELD, WI 53186
(262) 754-8888
CHICAGO | MILWAUKEE | NATIONWIDE

ZILBER INDUSTRIAL 3 @ LAKEVIEW CORPORATE PARK

108TH STREET & GREEN BAY ROAD (STH "31")
VILLAGE OF PLEASANT PRAIRIE, KENOSHA COUNTY

LANDSCAPE GENERAL DETAILS

REVISIONS

1	VOPP SITE PLAN SUBMITTAL	03/20/26			
2	VOPP RESUBMITTAL	05/11/26			
3	VOPP RESUBMITTAL	07/17/26			
4	VOPP RESUBMITTAL	10/02/26			

PEG JOB No. 644.00-WI
PEG PM AJS
START DATE 03/20/26
SCALE VARIES

SHEET L-5
L-5


© COPYRIGHT 2019

LANDSCAPE GENERAL DETAILS

www.pinnacle-engr.com

REVIEWED: DJB
DESIGNED: SAT
DRAFTED: SAT

Z:\PROJECTS\2016\644.00-WI\CAD\SHEETS\644.00-WI-LANDSCAPE PLAN.DWG

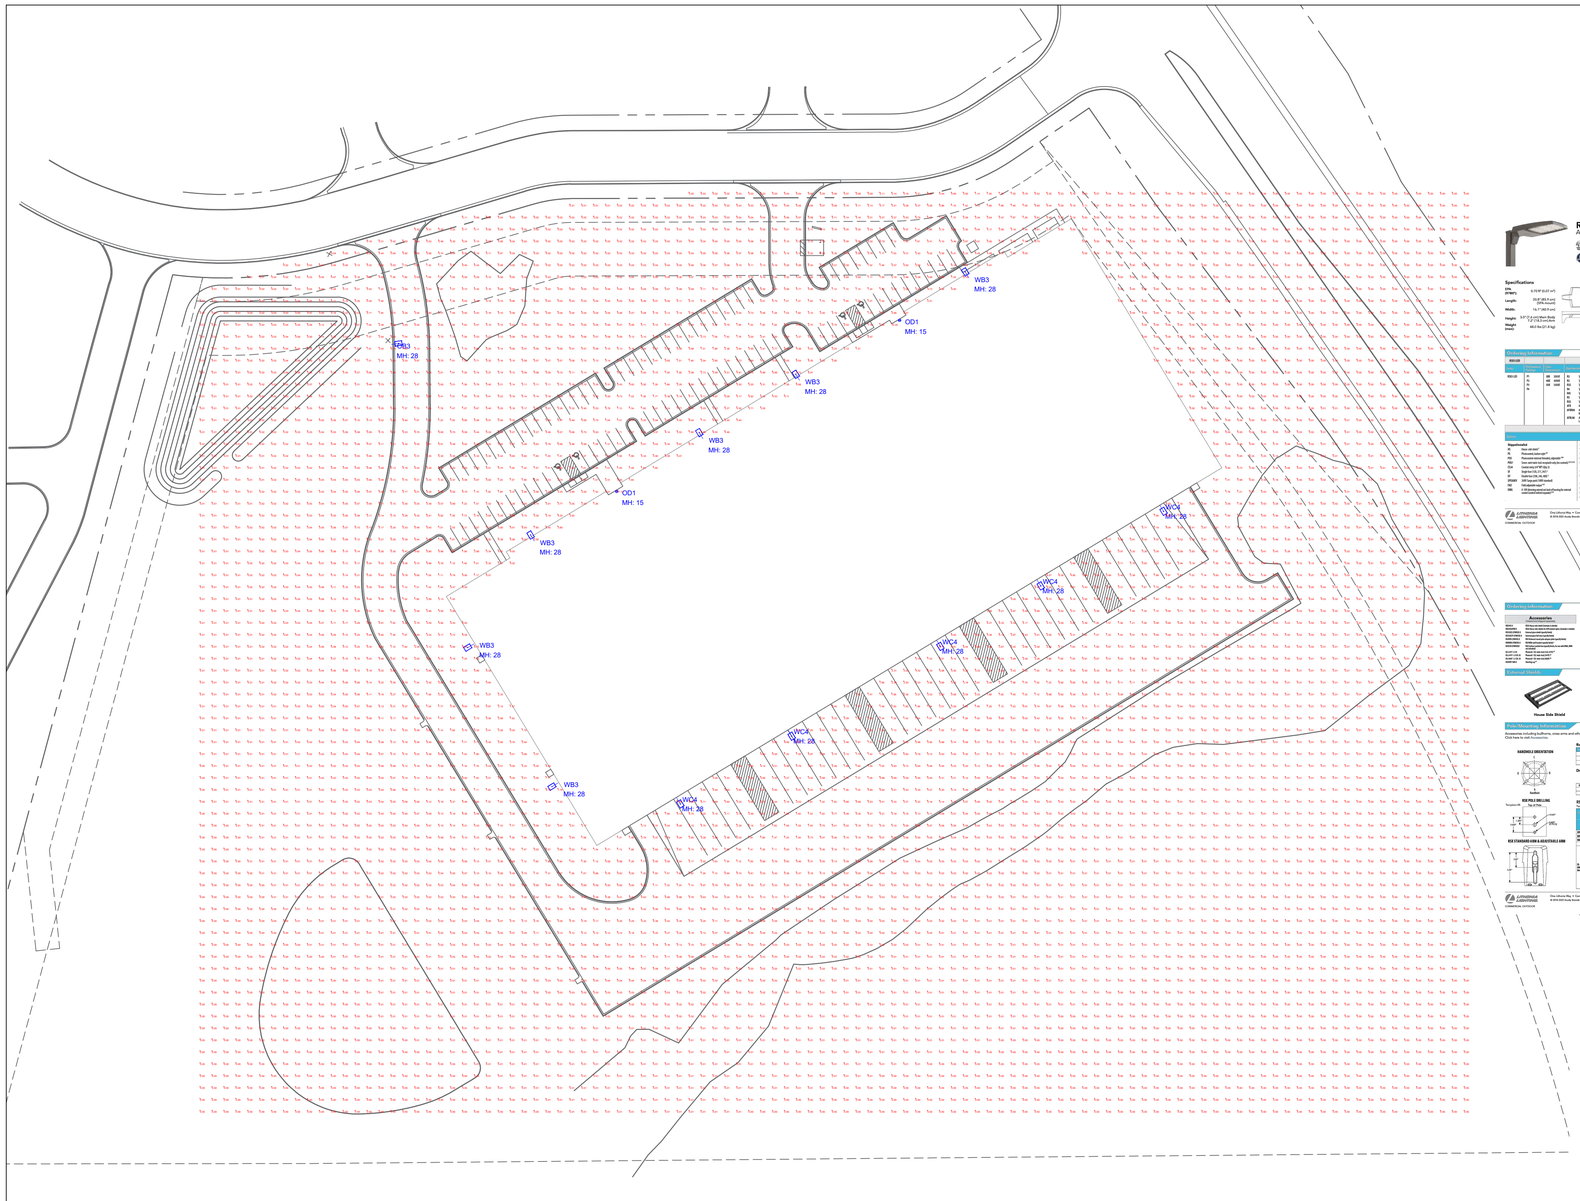

NOTE: ALL SITE LIGHTING SHALL BE DIRECTED DOWNWARDS AND SHALL NOT GLARE ONTO ADJACENT PROPERTIES OR PUBLIC ROADWAYS


Luminaire Schedule


Qty	Label	Arrangement	LLF	MFR	Description	Lum. Watts	Total Watts	Lum. Lumens
1	OB3	SINGLE	0.950	LITHONIA	RSX3 LED P3 xxK R3 25FT POLE 3FT BASE	266.82	266.82	35345
2	OD1	SINGLE	0.950	LITHONIA	LDN6 xx/40 L06AR LSS- e10wcp	44.26	88.52	4019
6	WB3	SINGLE	0.950	LITHONIA	RSX3 LED P3 xxK R3 WBA	266.82	1600.92	35345
5	WC4	SINGLE	0.950	LITHONIA	RSX3 LED P3 xxK R4 WBA	266.82	1334.1	35808


Calculation Summary

Label	CalcType	Units	Avg	Max	Min	Avg/Min	Max/Min
SITE	Illuminance	Fc	0.54	17.12	0.00	N.A.	N.A.
DRIVES	Illuminance	Fc	1.20	7.5	0.0	N.A.	N.A.
PARKING AREA	Illuminance	Fc	1.58	7.8	0.0	N.A.	N.A.
TRUCK AREA	Illuminance	Fc	1.91	9.9	0.0	N.A.	N.A.



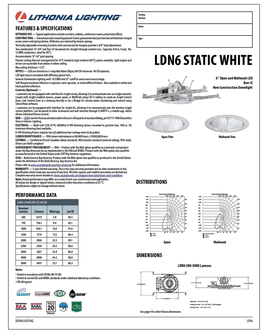

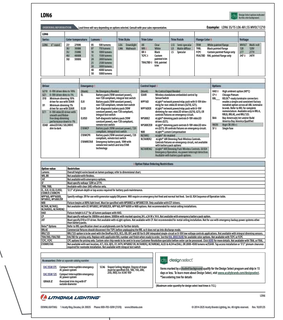

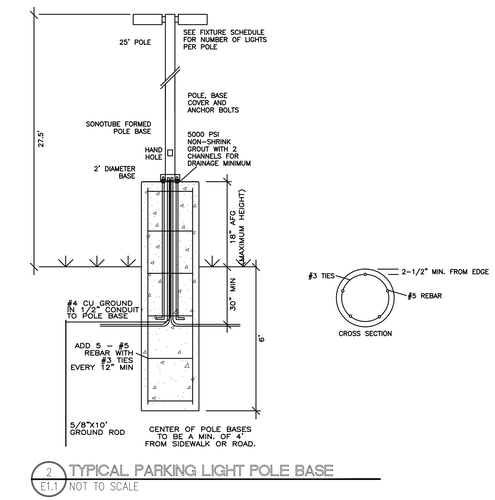

2 E1.1 TYPICAL PARKING LIGHT POLE BASE
NOT TO SCALE

ENTERPRISE
Lighting & Control

#	DATE	COMMENTS
		9/26/25 SITE LIGHTING CONDITIONAL APPROVAL SET

REVISIONS

DRAWN BY : AD
DATE : MAR 18, 2026
SCALE : 1" = 50'- 0"

ZILBER LAKEVIEW 3
PLEASANT PRAIRIE, WISCONSIN
SITE LIGHTING LAYOUT