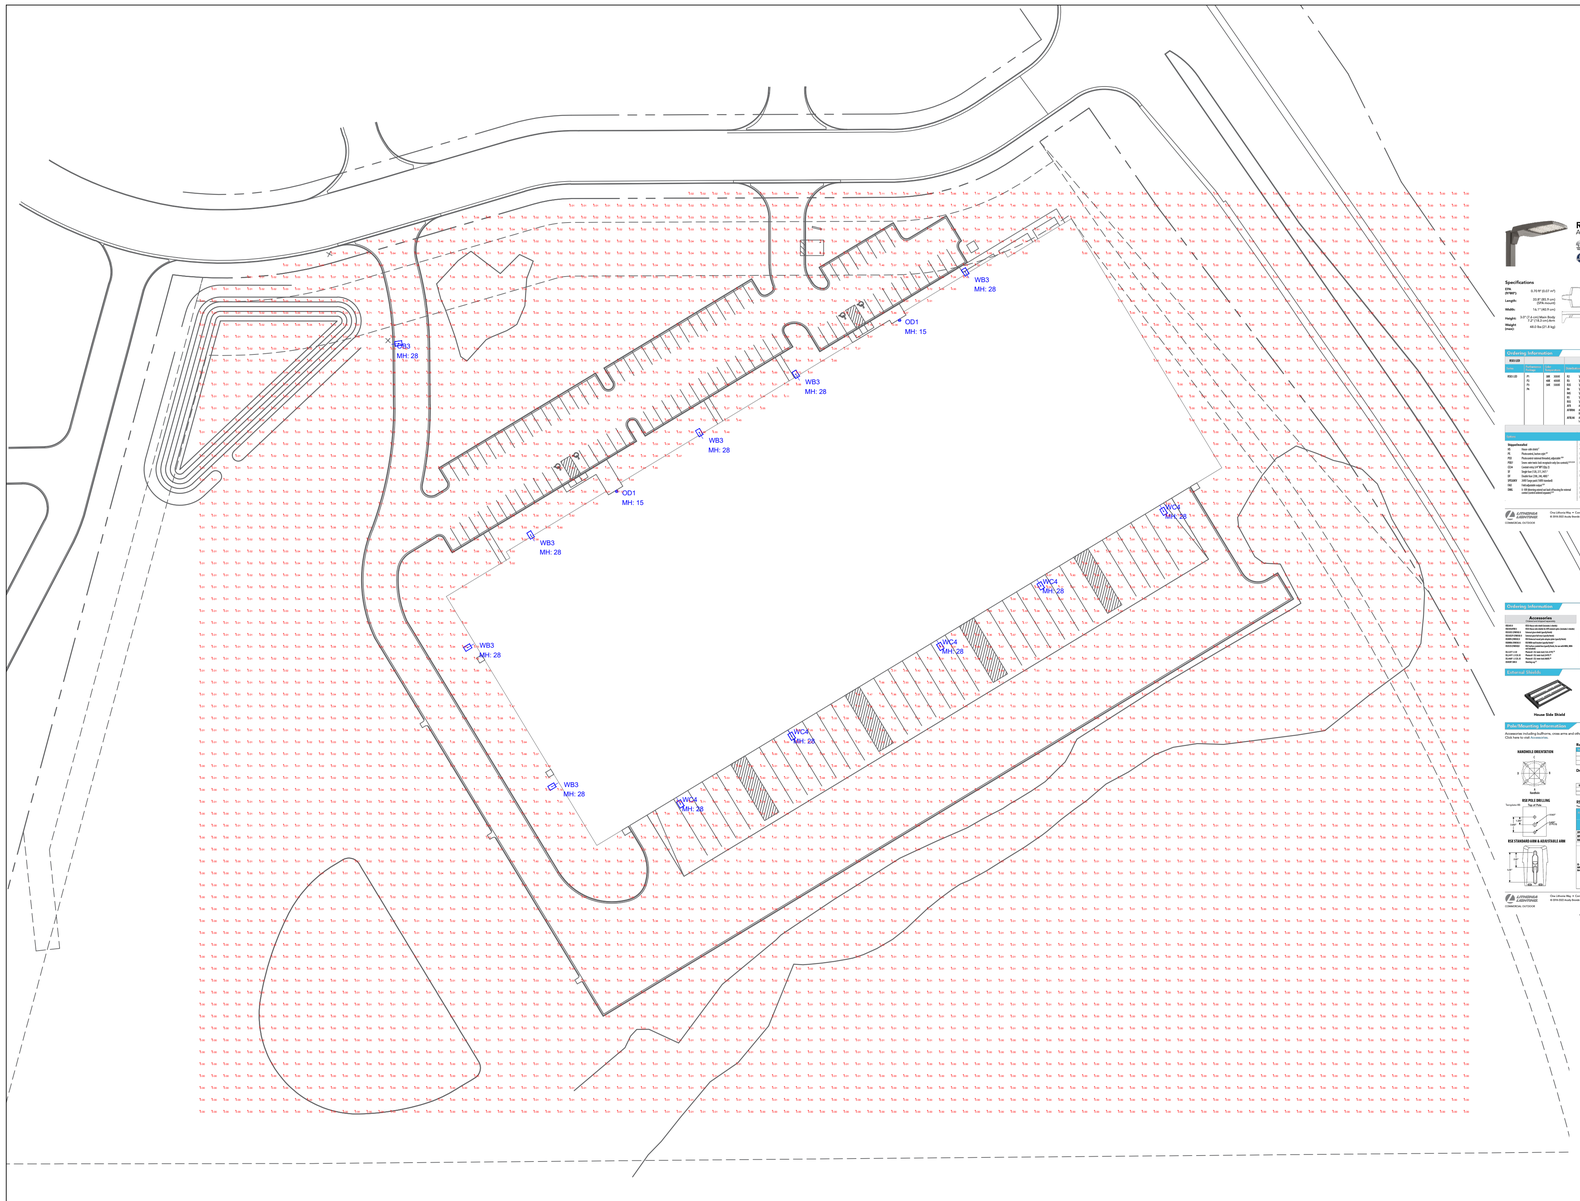



NOTE: ALL SITE LIGHTING SHALL BE DIRECTED DOWNWARDS AND SHALL NOT GLARE ONTO ADJACENT PROPERTIES OR PUBLIC ROADWAYS


Luminaire Schedule


Qty	Label	Arrangement	LLF	MFR	Description	Lum. Watts	Total Watts	Lum. Lumens
1	OB3	SINGLE	0.950	LITHONIA	RSX3 LED P3 xxK R3 25FT POLE 3FT BASE	266.82	266.82	35345
2	OD1	SINGLE	0.950	LITHONIA	LDN6 xx/40 L06AR LSS- e10wcp	44.26	88.52	4019
6	WB3	SINGLE	0.950	LITHONIA	RSX3 LED P3 xxK R3 WBA	266.82	1600.92	35345
5	WC4	SINGLE	0.950	LITHONIA	RSX3 LED P3 xxK R4 WBA	266.82	1334.1	35808

Calculation Summary

Label	CalcType	Units	Avg	Max	Min	Avg/Min	Max/Min
SITE	Illuminance	Fc	0.54	17.12	0.00	N.A.	N.A.
DRIVES	Illuminance	Fc	1.20	7.5	0.0	N.A.	N.A.
PARKING AREA	Illuminance	Fc	1.58	7.8	0.0	N.A.	N.A.
TRUCK AREA	Illuminance	Fc	1.91	9.9	0.0	N.A.	N.A.

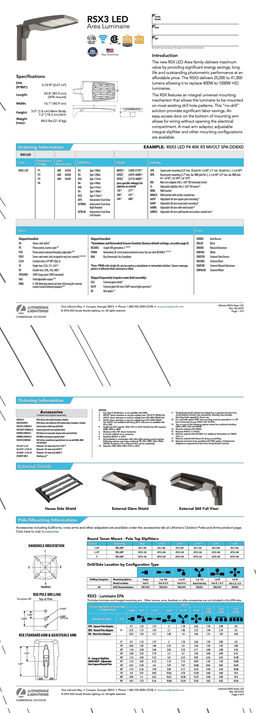

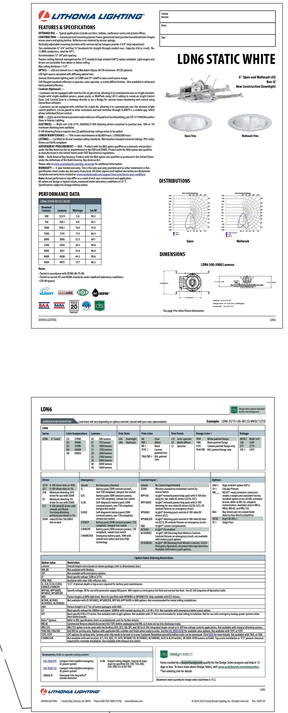

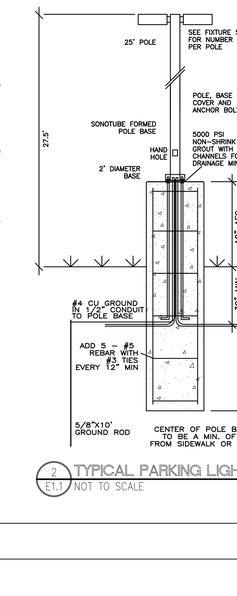

2 E1.1 TYPICAL PARKING LIGHT POLE BASE
NOT TO SCALE

ENTERPRISE
Lighting & Control

#	DATE	COMMENTS
		9/26/25 SITE / OPERATIONAL CONDITIONAL APPROVAL SET

REVISIONS

DRAWN BY : AD
DATE : MAR 18, 2026
SCALE : 1" = 50'- 0"

ZILBER LAKEVIEW 3
PLEASANT PRAIRIE, WISCONSIN
SITE LIGHTING LAYOUT